

MonoRex™

Specifications



Lightings beyond standard




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40(653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

MonoRex™ Series Downlight Specifications



CG Lighting, C509 Indeokwon IT Valley Imi-ro 40(653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

Light Distribution

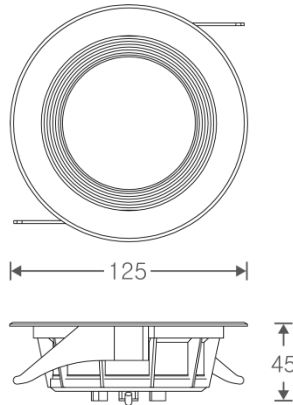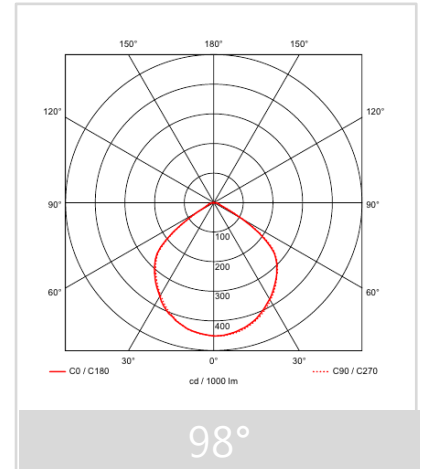

White

Description


Dimension - Ø125×H45mm
 Cut Out - Ø110mm
 Power Consumption - 7W
 Luminous Flux - 610lm
 Luminous Efficacy - 87lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 98°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K ■ 6000K
 CRI - Ra >85
 Life Time - 55,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS



Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W80×D36×H23mm
 Power Consumption - 7W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 24V / 260mA
 Control - Switchable

LED

Manufacturer - Epistar
 Package Series - LT-WFRS0803-X07




175



45

White

Light Distribution

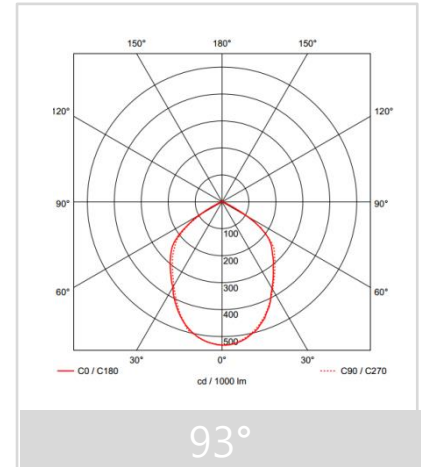

Description


Dimension - Ø175×H45mm
 Cut Out - Ø150mm
 Power Consumption - 10W
 Luminous Flux - 755lm
 Luminous Efficacy - 75.5lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 93°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 55,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS



Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W80×D36×H23mm
 Power Consumption - 10W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 34V / 300mA
 Control - Switchable

LED


Manufacturer - Epistar
 Package Series - LT-WFRS0806-X10



White

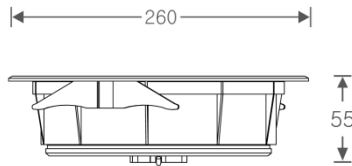

Light Distribution

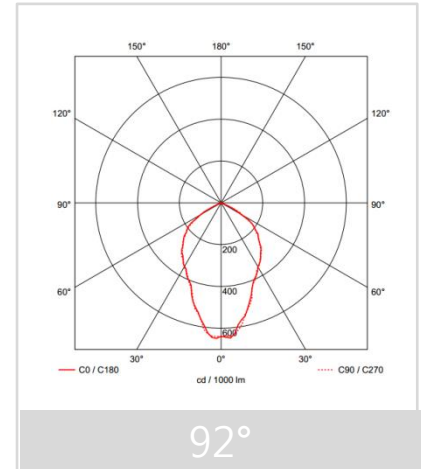

Description


Dimension - Ø226×H55mm
 Cut Out - Ø210mm
 Power Consumption - 20W
 Luminous Flux - 1,808lm
 Luminous Efficacy - 90.4lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 92°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K ■ 6000K
 CRI - Ra >80
 Life Time - 55,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS



Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W140×D45×H28mm
 Power Consumption - 20W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 30V / 600mA
 Control - Switchable

LED


Manufacturer - Epistar
 Package Series - LT-WFRS0812-X20



White

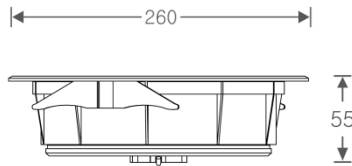

Light Distribution

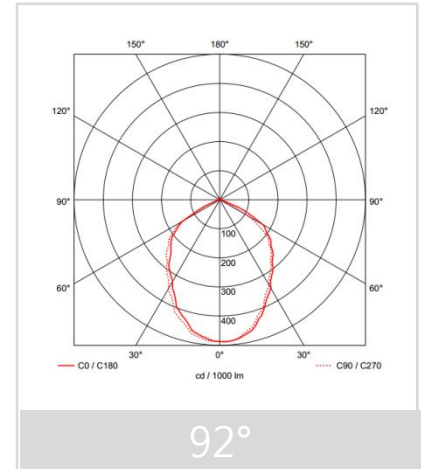

Description



Dimension - Ø226×H55mm
 Cut Out - Ø210mm
 Power Consumption - 30W
 Luminous Flux - 2,929lm
 Luminous Efficacy - 97.6lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 92°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K ■ 6000K
 CRI - Ra >80
 Life Time - 55,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W115×D45×H28mm
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 28-38V / 900mA
 Control - Switchable

LED

Manufacturer - Epistar




175



90

White

Light Distribution

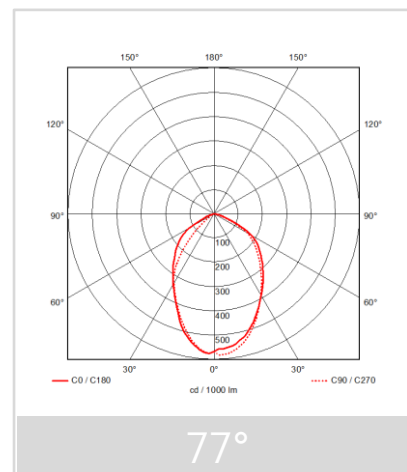

Description


Dimension - Ø175×H90mm
 Cut Out - Ø150mm
 Power Consumption - 30W
 Luminous Flux - 2,325lm
 Luminous Efficacy - 77.5lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 77°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >85
 Life Time - 55,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W130×D43×H28mm
 Power Consumption - 30W
 Input Voltage - AC 100-240V / 50~60Hz
 Output Voltage - DC 36V / 720mA
 Control - Switchable


LED

Manufacturer - LG Innotek
 Package Series - LG 3030



White

Light Distribution

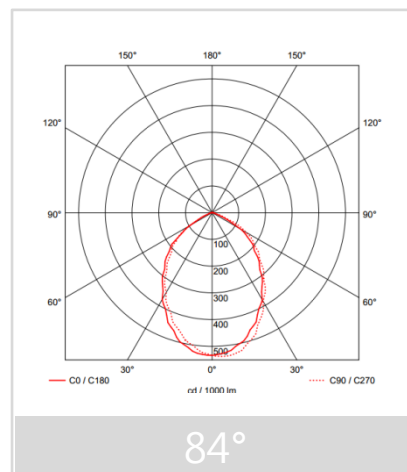

Description



Dimension - Ø226×H90mm
 Cut Out - Ø200mm
 Power Consumption - 50W
 Luminous Flux - 3,717lm
 Luminous Efficacy - 74lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 84°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >85
 Life Time - 55,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W150×D40×H30mm
 Power Consumption - 50W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 40V / 1200mA
 Control - Switchable


LED

Manufacturer - LG Innotek
 Package Series - LG 3030

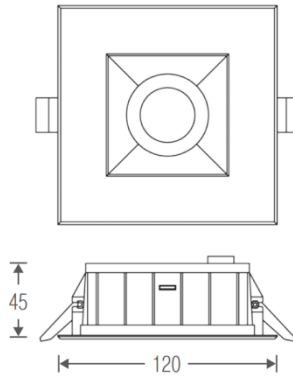

White

Light Distribution

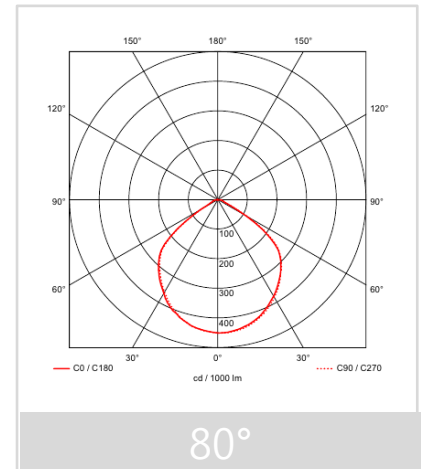

Description


Dimension - W120×D120×H45mm
 Cut Out - 100×100mm
 Power Consumption - 7W
 Luminous Flux - 610lm
 Luminous Efficacy - 87lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 80°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 55,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS


Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W80×D36×H23mm
 Power Consumption - 7W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 24V / 260mA
 Control - Switchable

LED

Manufacturer - Epistar
 Package Series - LT-WFRS0803-X07

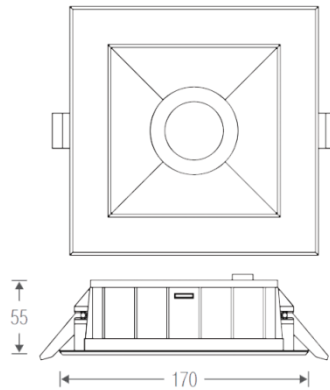

Light Distribution

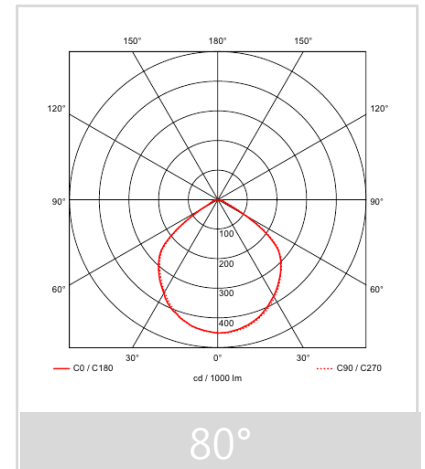

White

Description


Dimension - W170×D170×H55mm
 Cut Out - 150×150mm
 Power Consumption - 10W
 Luminous Flux - 755lm
 Luminous Efficacy - 75.5lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 80°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 55,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W80×D36×H23mm
 Power Consumption - 10W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 34V / 300mA
 Control - Switchable


LED

Manufacturer - Epistar
 Package Series - LT-WFRS0806-X10

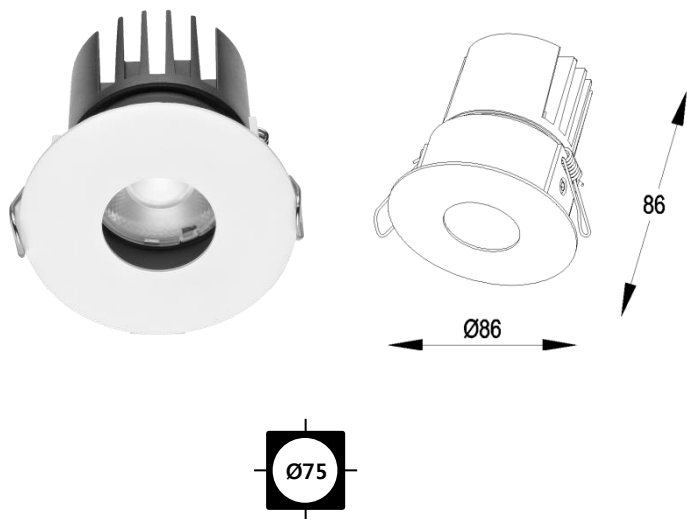

■ White ■ Black

Light Distribution

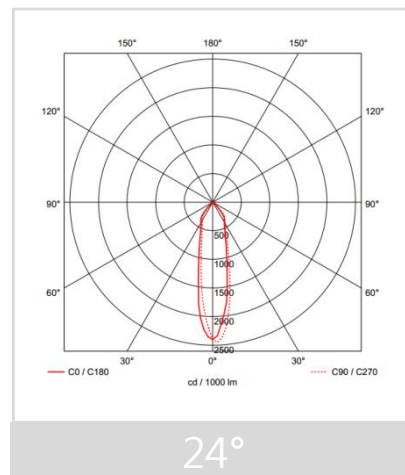

Description

Dimension - Ø86×H86mm
 Cut Out - Ø75mm
 Power Consumption - 8W
 Luminous Flux - 616lm
 Luminous Efficacy - 77lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS


Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1202S


CGTH-118-0071 (LENS)

MonoRex™

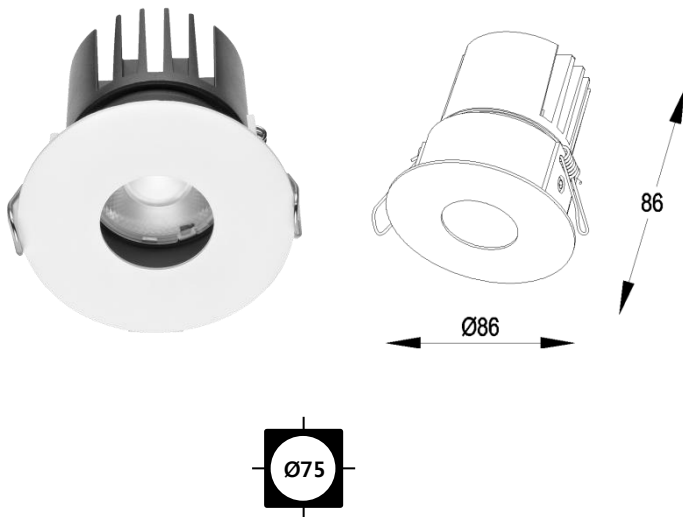

■ White ■ Black

Light Distribution

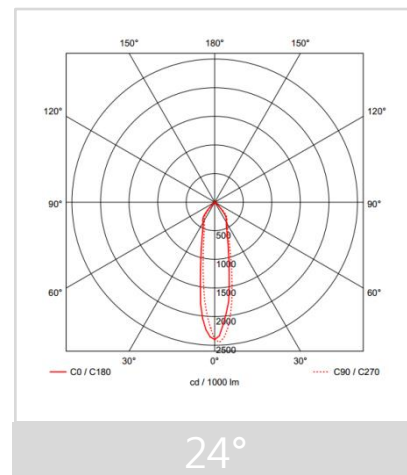

Description

Dimension - Ø86×H86mm
Cut Out - Ø75mm
Power Consumption - 15W
Luminous Flux - 1,155lm
Luminous Efficacy - 77lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

SMPS


Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable

LED

Manufacturer - Lumileds
Package Series - 1202S


CGTH-067-0072 (LENS)

MonoRex™

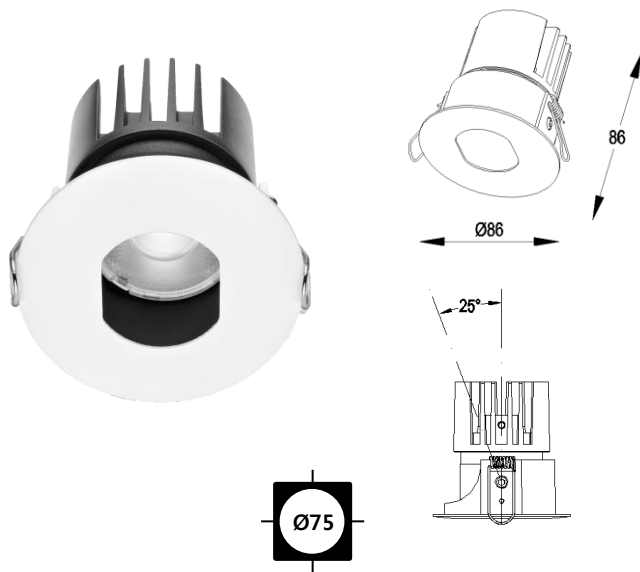

■ White ■ Black

Light Distribution

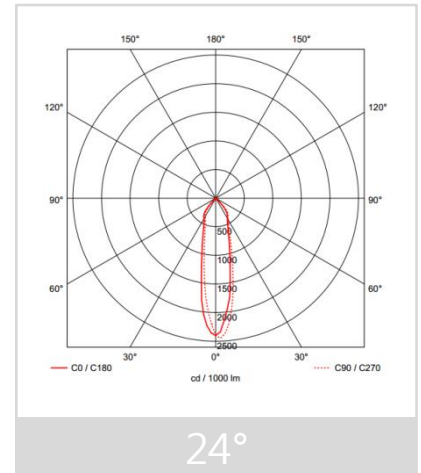

Description

Dimension - Ø86×H86mm
Cut Out - Ø75mm
Power Consumption - 8W
Luminous Flux - 616lm
Luminous Efficacy - 77lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable


CGTH-118-0072 (LENS)

MonoRex™

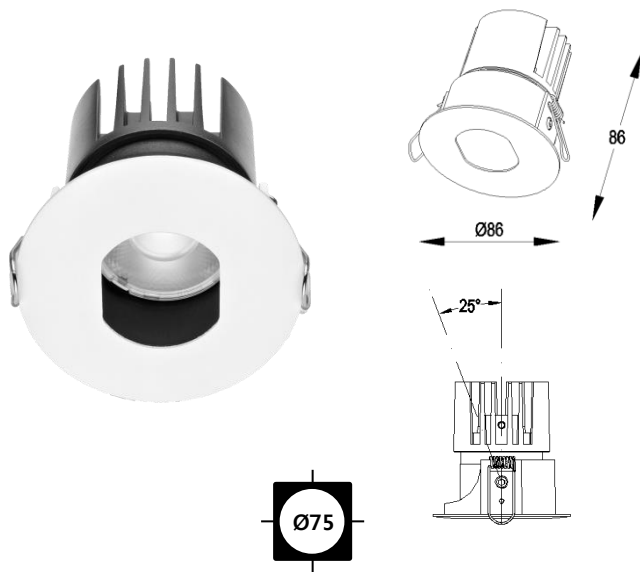

■ White ■ Black

Light Distribution

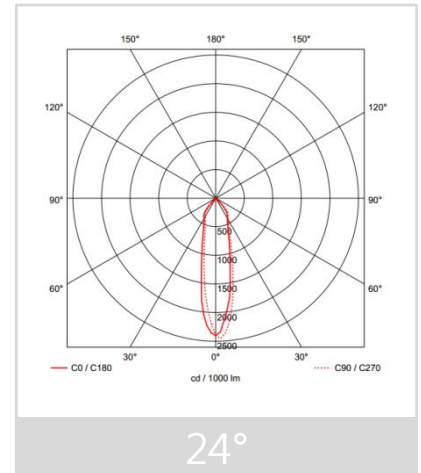

Description


Dimension - Ø86×H86mm
Cut Out - Ø75mm
Power Consumption - 15W
Luminous Flux - 1,155lm
Luminous Efficacy - 77lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED

Manufacturer - Lumileds
Package Series - 1202S


SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable

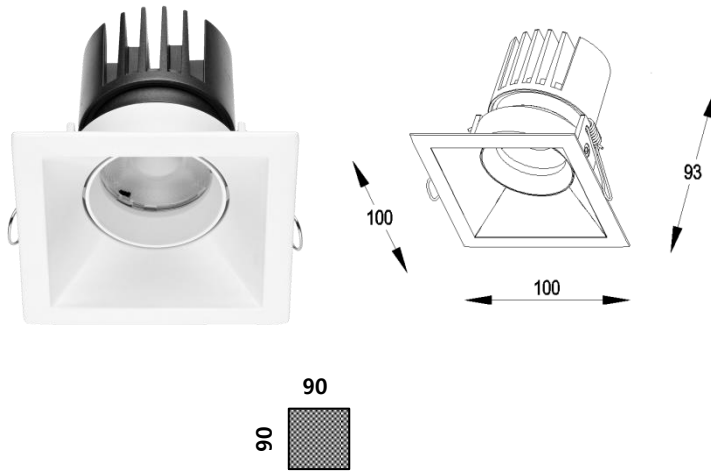

White Black

Light Distribution

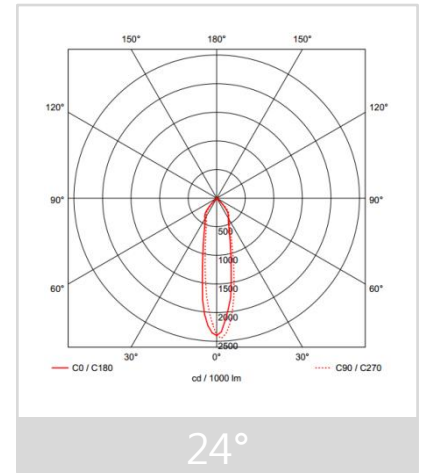

Description


Dimension – W100xD100×H93mm
 Cut Out – W90xD90mm
 Power Consumption – 8W
 Luminous Flux – 656lm
 Luminous Efficacy – 82lm/W
 Material – Body: Aluminum / Cover: Tempered Glass
 Beam Angle – 15° / 24° / 36°
 Color Temperature – 3000K 4000K 5000K
 CRI – Ra >80
 Life Time – 35,000hrs
 Control – Switchable / TRIAC Dimmable

SMPS

Manufacturer – Osram
 SMPS Type – External
 Dimension – W115×D45×H25mm
 Power Consumption – 8W
 Input Voltage – AC 220-240V / 50-60Hz
 Output Voltage – DC 21-42V / 180mA
 Control – Switchable


LED

Manufacturer – Lumileds
 Package Series – 1202S

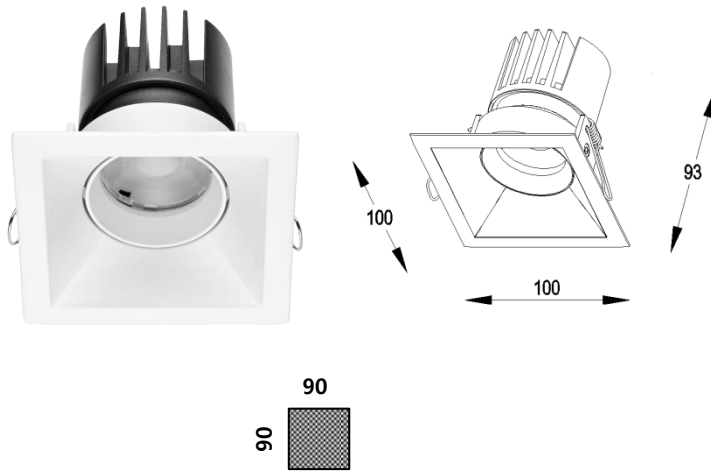

White Black

Light Distribution

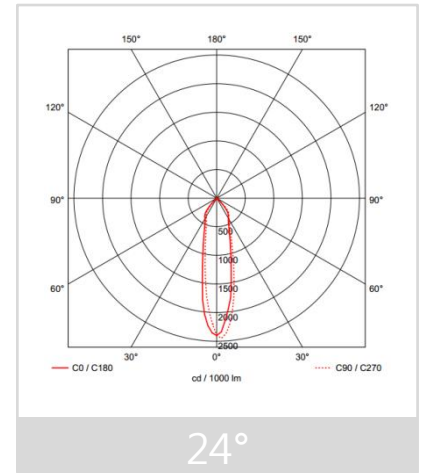

Description

Dimension – W100xD100×H93mm
 Cut Out – W90xD90mm
 Power Consumption – 15W
 Luminous Flux – 1,230lm
 Luminous Efficacy – 82lm/W
 Material – Body: Aluminum / Cover: Tempered Glass
 Beam Angle – 15° / 24° / 36°
 Color Temperature – 3000K 4000K 5000K
 CRI – Ra >80
 Life Time – 35,000hrs
 Control – Switchable / TRIAC Dimmable

SMPS


Manufacturer – Osram
 SMPS Type – External
 Dimension – W115×D45×H25mm
 Power Consumption – 15W
 Input Voltage – AC 220-240V / 50-60Hz
 Output Voltage – DC 21-42V / 350mA
 Control – Switchable

LED

Manufacturer – Lumileds
 Package Series – 1202S


CGTH-067-0074 (LENS)

MonoRex™

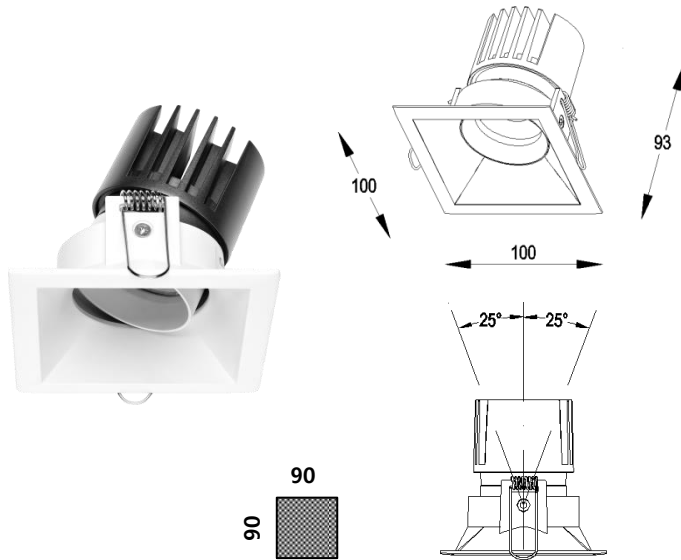

■ White ■ Black

Light Distribution

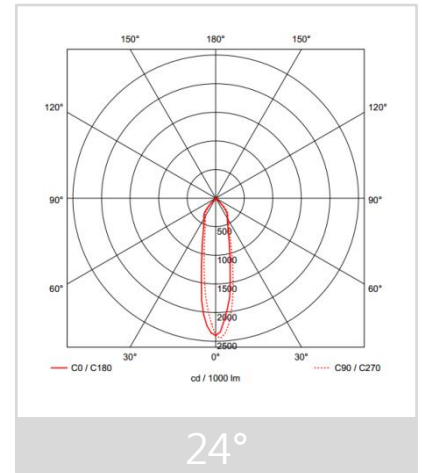

Description

Dimension – W100xD100×H93mm
Cut Out – W90xD90mm
Power Consumption – 8W
Luminous Flux – 656lm
Luminous Efficacy – 82lm/W
Material – Body: Aluminum / Cover: Tempered Glass
Beam Angle – 15° / 24° / 36°
Color Temperature – ■ 3000K ■ 4000K ■ 5000K
CRI – Ra >80
Life Time – 35,000hrs
Control – Switchable / TRIAC Dimmable

LED


Manufacturer – Lumileds
Package Series – 1202S

SMPS

Manufacturer – Osram
SMPS Type – External
Dimension – W115×D45×H25mm
Power Consumption – 8W
Input Voltage – AC 220-240V / 50-60Hz
Output Voltage – DC 21-42V / 180mA
Control – Switchable


CGTH-118-0074 (LENS)

MonoRex™

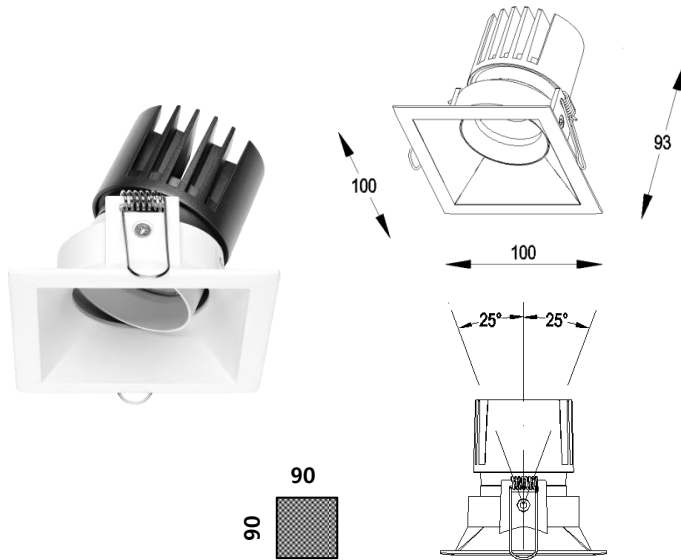

■ White ■ Black

Light Distribution

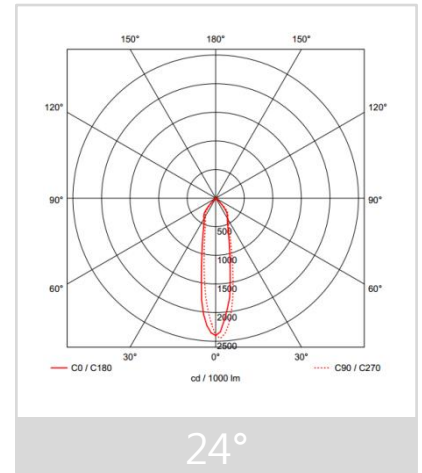

Description


Dimension – W100xD100×H93mm
Cut Out – W90xD90mm
Power Consumption – 15W
Luminous Flux – 1,230lm
Luminous Efficacy – 82lm/W
Material – Body: Aluminum / Cover: Tempered Glass
Beam Angle – 15° / 24° / 36°
Color Temperature – ■ 3000K ■ 4000K ■ 5000K
CRI – Ra >80
Life Time – 35,000hrs
Control – Switchable / TRIAC Dimmable

LED

Manufacturer – Lumileds
Package Series – 1202S


SMPS

Manufacturer – Osram
SMPS Type – External
Dimension – W115×D45×H25mm
Power Consumption – 15W
Input Voltage – AC 220-240V / 50-60Hz
Output Voltage – DC 21-42V / 350mA
Control – Switchable

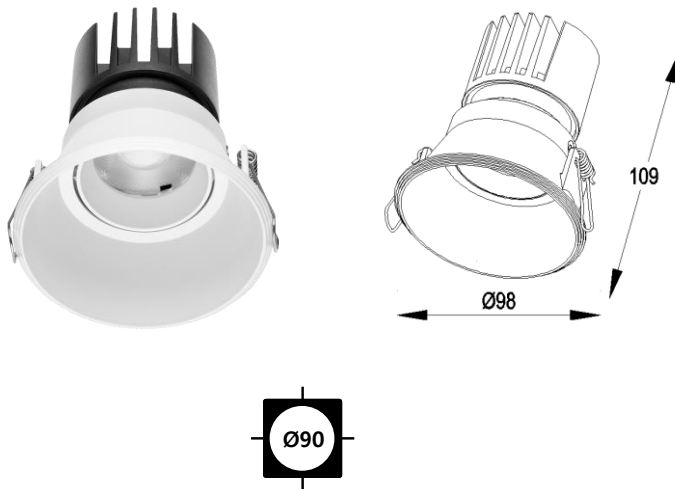

■ White ■ Black

Light Distribution

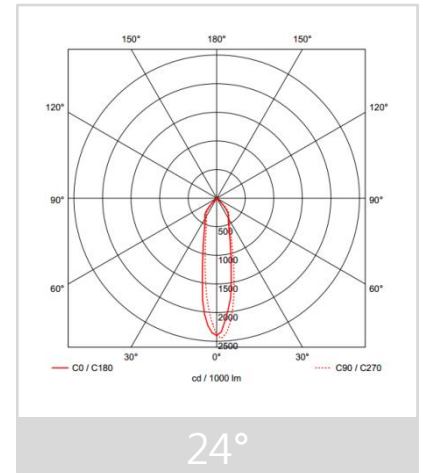

Description

Dimension - Ø98xH109mm
 Cut Out - Ø90mm
 Power Consumption - 8W
 Luminous Flux - 640lm
 Luminous Efficacy - 80lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS


Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1202S


CGTH-118-0075 (LENS)

MonoRex™

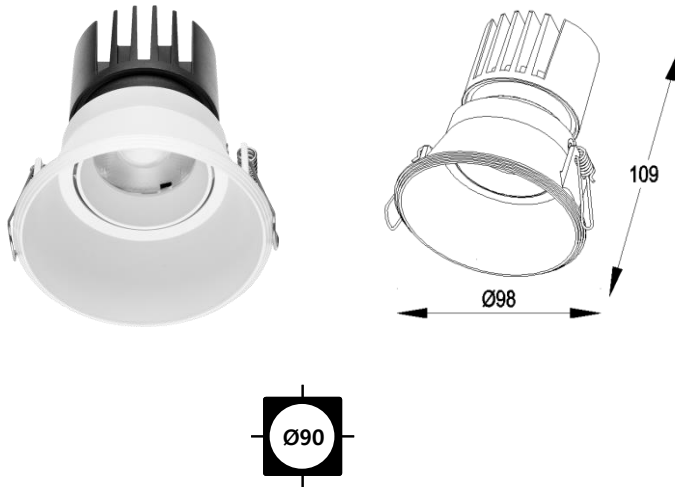

■ White ■ Black

Light Distribution

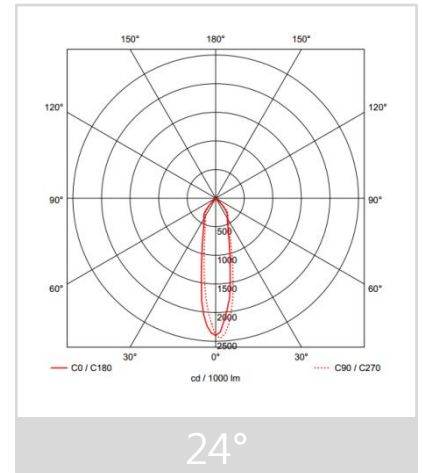

Description

Dimension - Ø98xH109mm
Cut Out - Ø90mm
Power Consumption - 15W
Luminous Flux - 1,200lm
Luminous Efficacy - 80lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

SMPS


Manufacturer - Osram
SMPS Type - External
Dimension - W115xD45xH25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable

LED

Manufacturer - Lumileds
Package Series - 1202S


CGTH-067-0076 (LENS)

MonoRex™

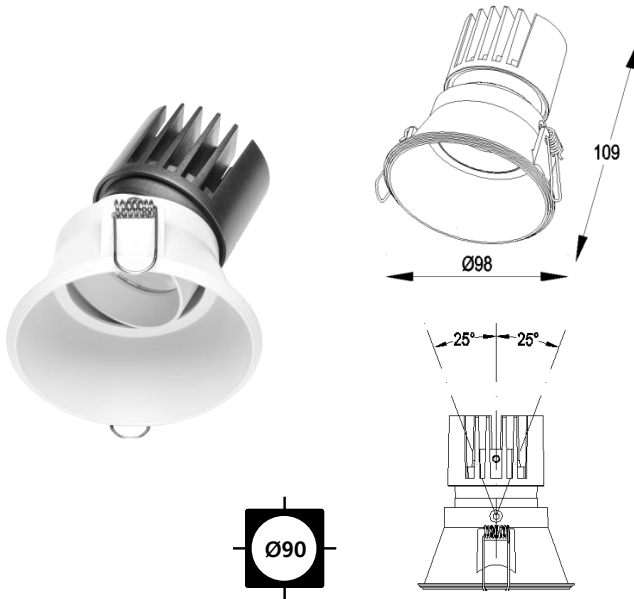

■ White ■ Black

Light Distribution

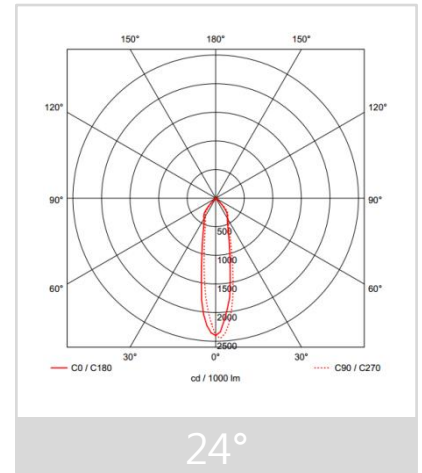

Description

Dimension - Ø98xH109mm
Cut Out - Ø90mm
Power Consumption - 8W
Luminous Flux - 640lm
Luminous Efficacy - 80lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable


CGTH-118-0076 (LENS)

MonoRex™

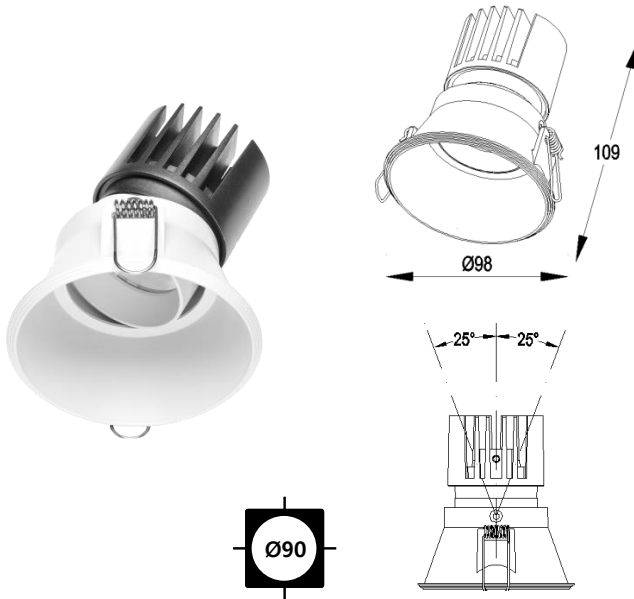

■ White ■ Black

Light Distribution

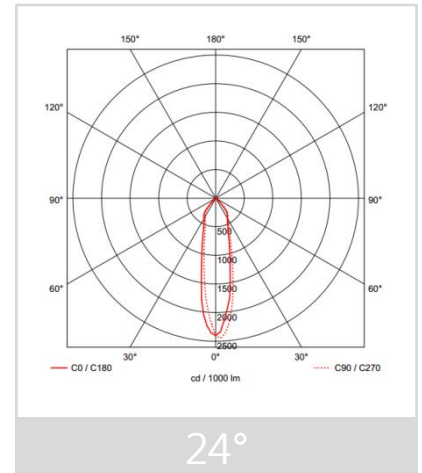

Description

Dimension - Ø98xH109mm
Cut Out - Ø90mm
Power Consumption - 15W
Luminous Flux - 1,200lm
Luminous Efficacy - 80lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable


CGTH-067-0078 (LENS)

MonoRex™

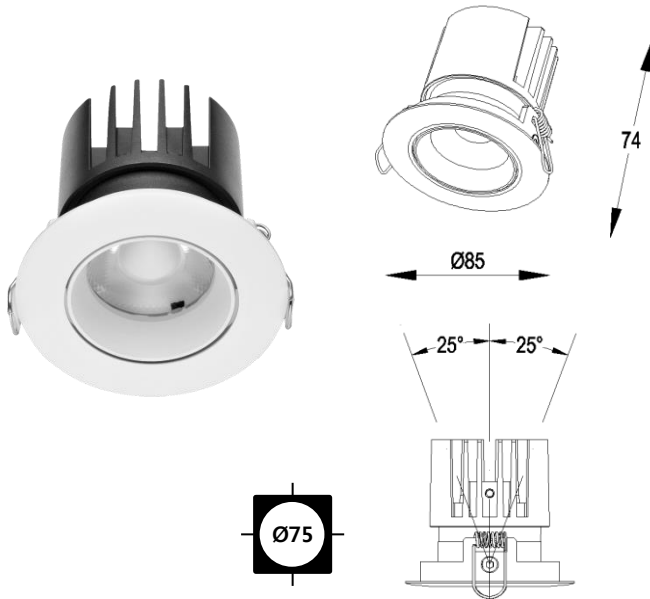

■ White ■ Gray ■ Black

Light Distribution

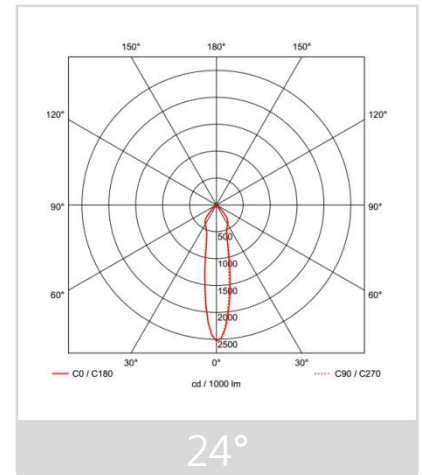

Description

Dimension - Ø85×H74mm
Cut Out - Ø75mm
Power Consumption - 8W
Luminous Flux - 680lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Polycarbonate
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable


CGTH-118-0078 (LENS)

MonoRex™

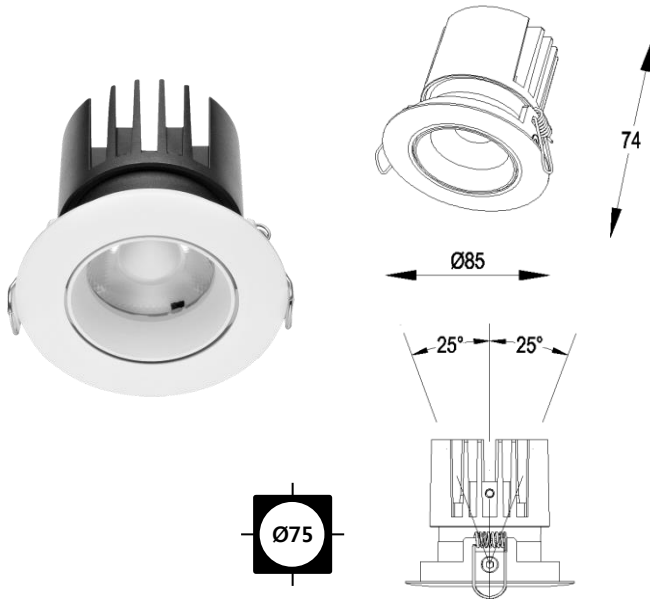

■ White ■ Gray ■ Black

Light Distribution

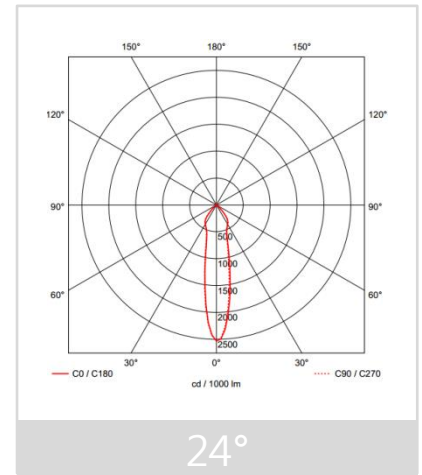

Description

Dimension - Ø85×H74mm
Cut Out - Ø75mm
Power Consumption - 15W
Luminous Flux - 1,275lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Polycarbonate
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS


Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable

CGTH-067-0079 (LENS)

MonoRex™

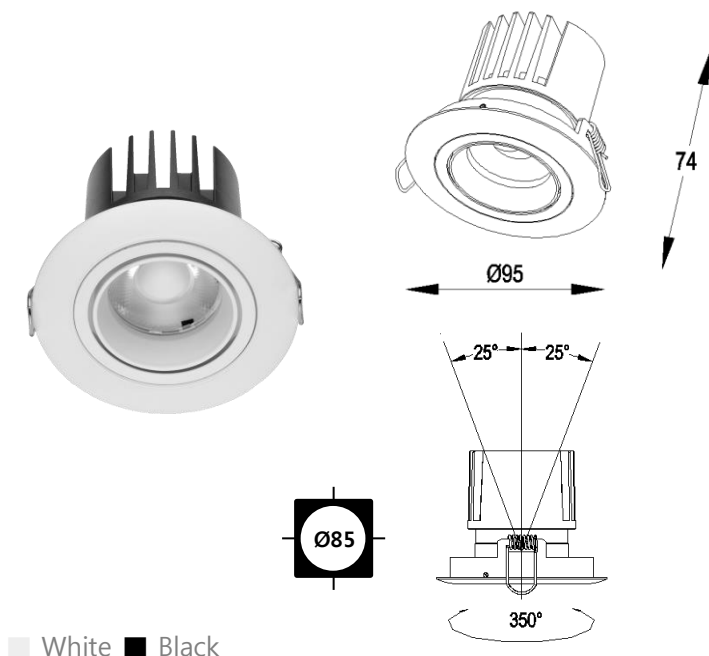

Light Distribution

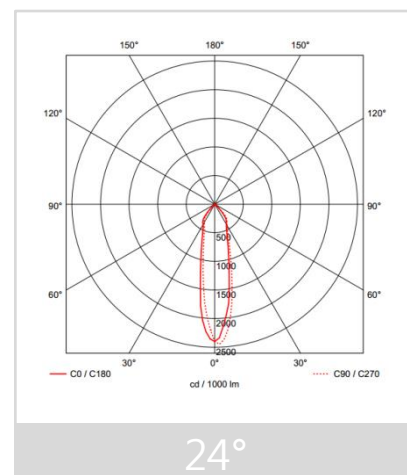

Description

Dimension - Ø95xH74mm
Cut Out - Ø85mm
Power Consumption - 8W
Luminous Flux - 656lm
Luminous Efficacy - 82lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - 3000K 4000K 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS


Manufacturer - Osram
SMPS Type - External
Dimension - W115xD45xH25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable

CGTH-118-0079 (LENS)

MonoRex™

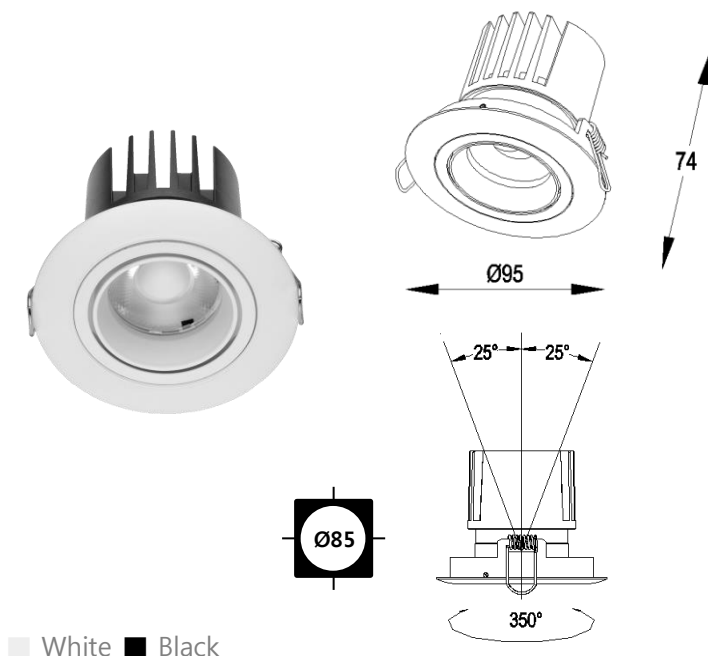

Light Distribution

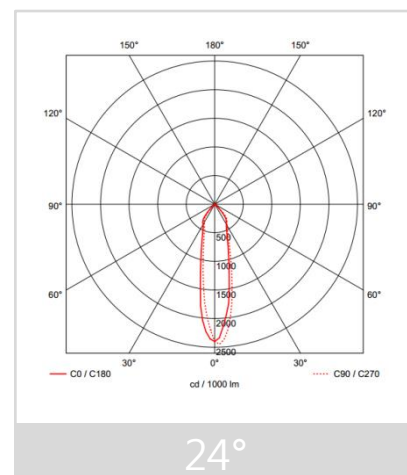

Description

Dimension - Ø95xH74mm
Cut Out - Ø85mm
Power Consumption - 15W
Luminous Flux - 1,230lm
Luminous Efficacy - 82lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - 3000K 4000K 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable


CGTH-067-0080 (LENS)

MonoRex™

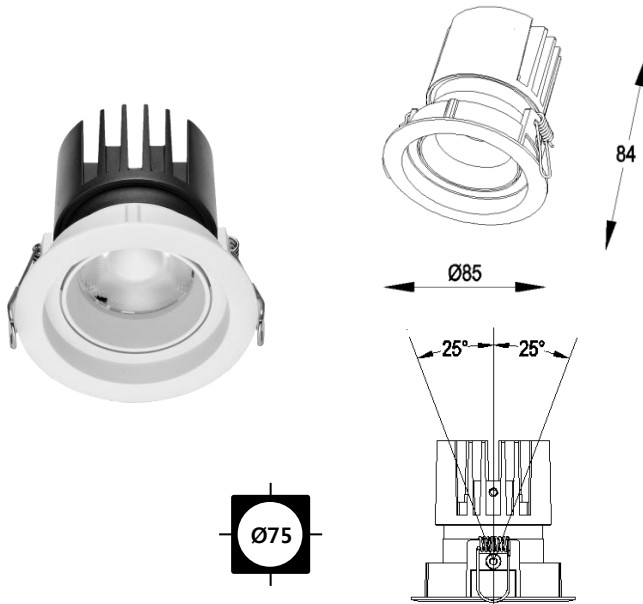

■ White ■ Black

Light Distribution

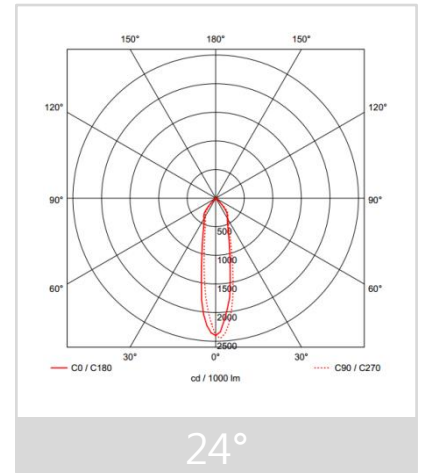

Description

Dimension - Ø85xH84mm
Cut Out - Ø75mm
Power Consumption - 8W
Luminous Flux - 656lm
Luminous Efficacy - 82lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115xD45xH25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable


CGTH-118-0080 (LENS)

MonoRex™

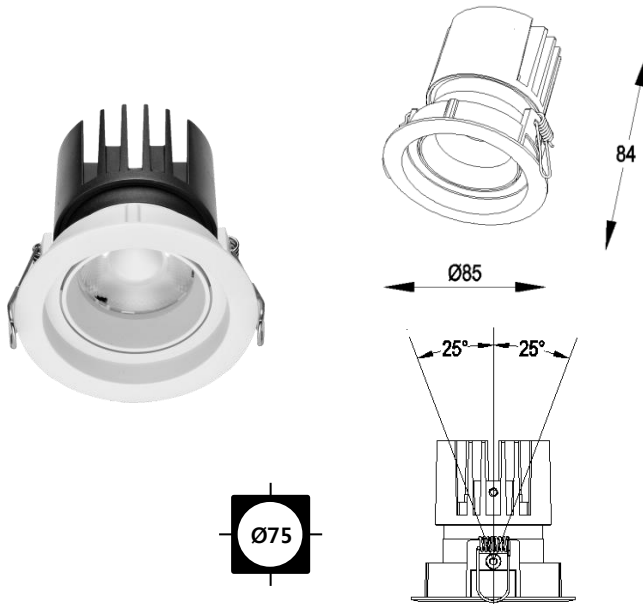

■ White ■ Black

Light Distribution

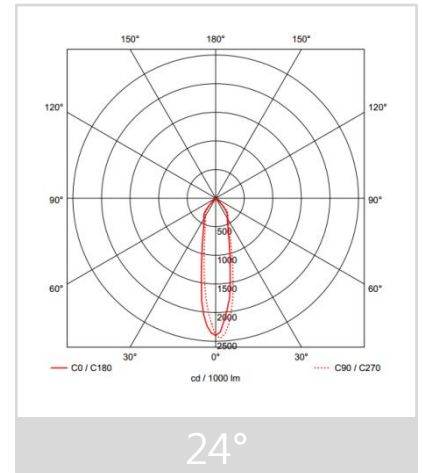

Description

Dimension - Ø85xH84mm
Cut Out - Ø75mm
Power Consumption - 15W
Luminous Flux - 1,230lm
Luminous Efficacy - 82lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable


CGTH-067-0081 (LENS)

MonoRex™

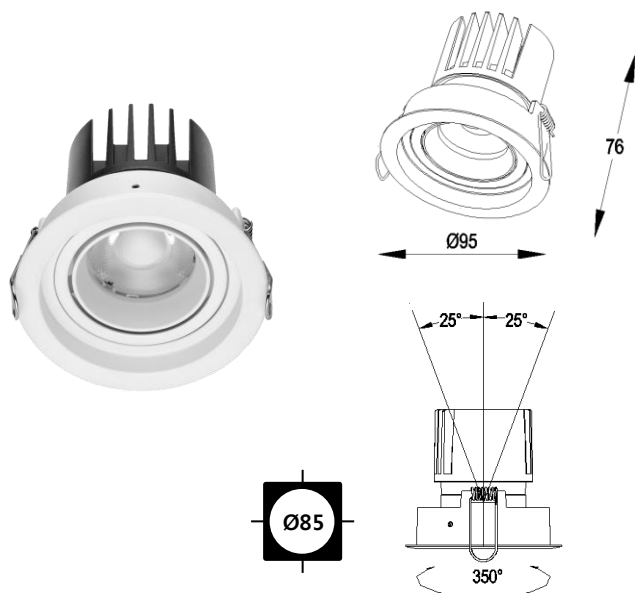

■ White ■ Black

Light Distribution

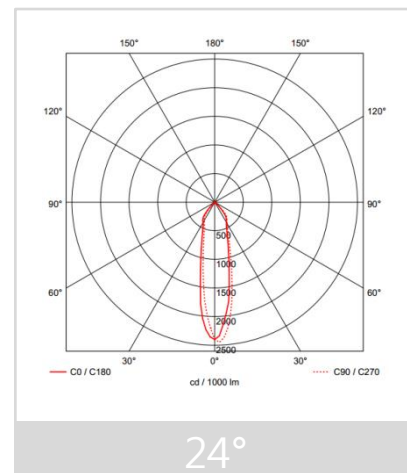

Description

Dimension - Ø95xH76mm
Cut Out - Ø85mm
Power Consumption - 8W
Luminous Flux - 680lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED


Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115xD45xH25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable


CGTH-118-0081 (LENS)

MonoRex™

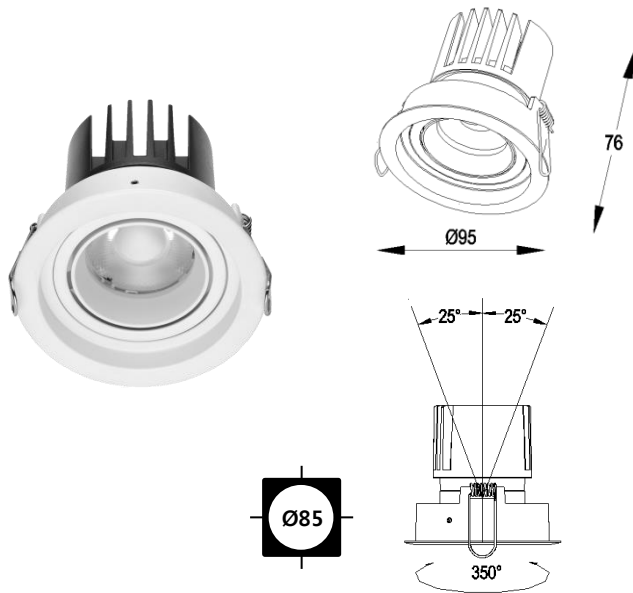

■ White ■ Black

Light Distribution

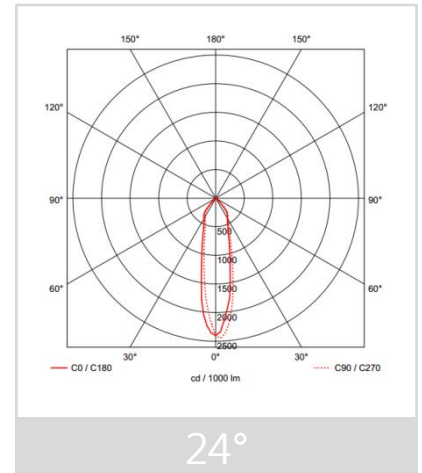

Description

Dimension - Ø95xH76mm
Cut Out - Ø85mm
Power Consumption - 15W
Luminous Flux - 1,275lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC Dimmable

LED

Manufacturer - Lumileds
Package Series - 1202S

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable


CGTH-067-0586

MonoRex™



■ White ■ Black

■ Light Distribution

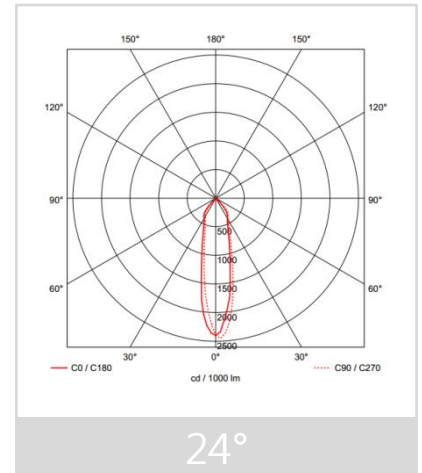

■ Description

Dimension - Ø86×H83mm
Cut Out - Ø75mm
Power Consumption - 8W
Luminous Flux - 475lm
Luminous Efficacy - 59lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 38°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable

■ LED


Manufacturer - Lumileds
Package Series - 1202S

■ SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable


CGTH-067-0587

MonoRex™

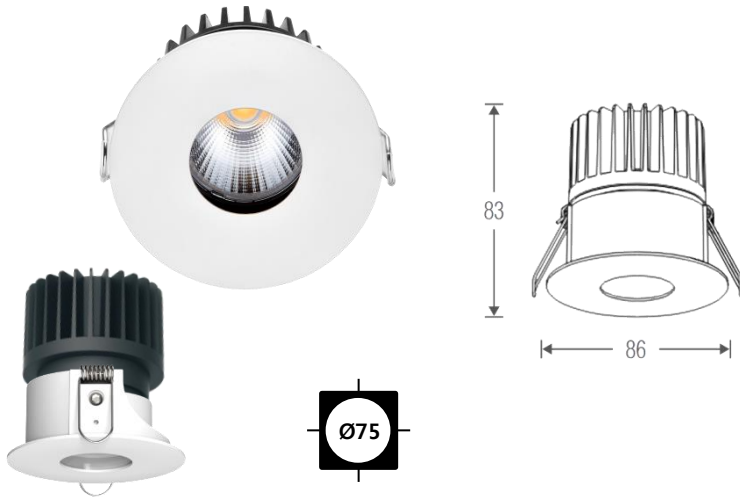

■ White ■ Black

Light Distribution

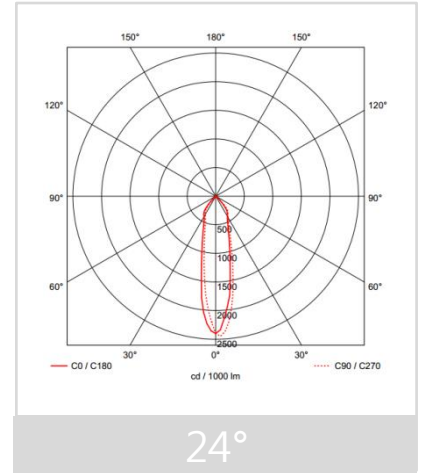

Description


Dimension - Ø86×H83mm
Cut Out - Ø75mm
Power Consumption - 8W
Luminous Flux - 475lm
Luminous Efficacy - 59lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 38°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable

LED

Manufacturer - Lumileds
Package Series - 1202S


SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable

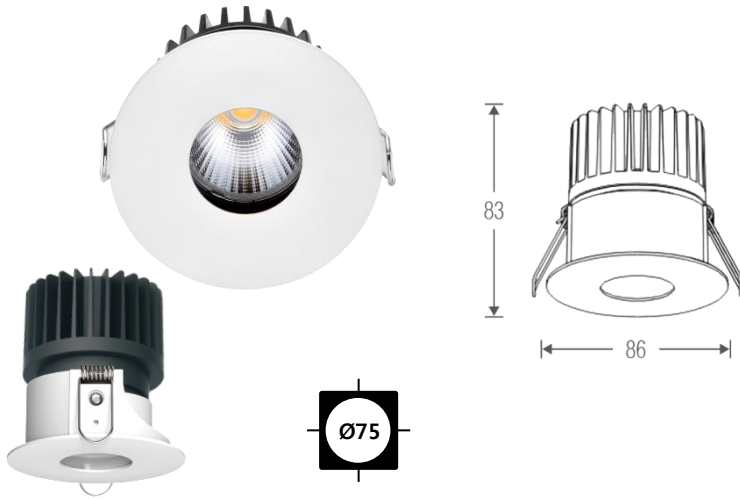

■ White ■ Black

Light Distribution

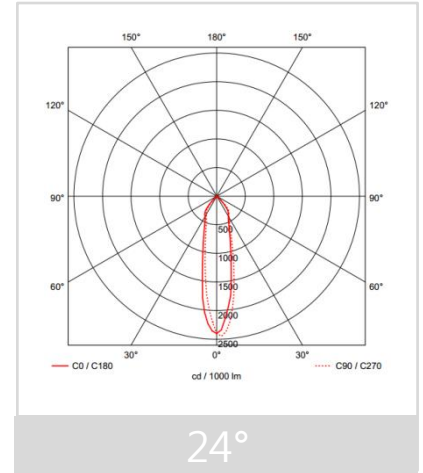

Description


Dimension - Ø86×H83mm
 Cut Out - Ø75mm
 Power Consumption - 15W
 Luminous Flux - 885lm
 Luminous Efficacy - 59lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1202S

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable

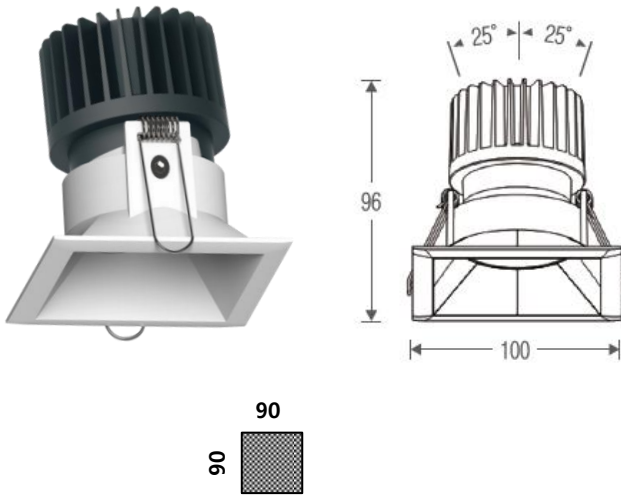

White Black


Description

Dimension – W100xD100×H96mm
 Cut Out – W90xD90mm
 Power Consumption – 8W
 Luminous Flux – 576lm
 Luminous Efficacy – 72lm/W
 Material – Body: Aluminum / Cover: Tempered Glass
 Beam Angle – 15° / 24° / 38°
 Color Temperature – 3000K 4000K 5000K
 CRI – Ra >80
 Life Time – 35,000hrs
 Control – Switchable

LED


Manufacturer – Lumileds
 Package Series – 1202S

Light Distribution

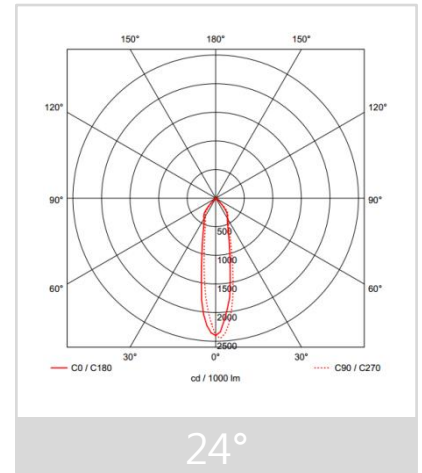

SMPS

Manufacturer – Osram
 SMPS Type – External
 Dimension – W115×D45×H25mm
 Power Consumption – 8W
 Input Voltage – AC 220-240V / 50-60Hz
 Output Voltage – DC 21-42V / 180mA
 Control – Switchable

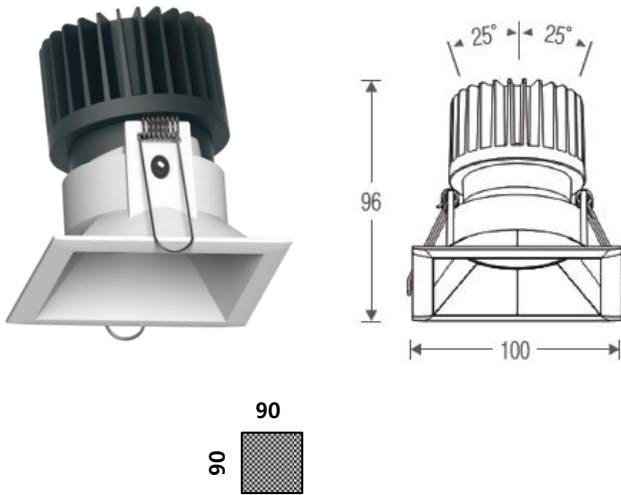

White Black


Description

Dimension – W100xD100×H96mm
 Cut Out – W90xD90mm
 Power Consumption – 15W
 Luminous Flux – 1,020lm
 Luminous Efficacy – 68lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1202S

Light Distribution

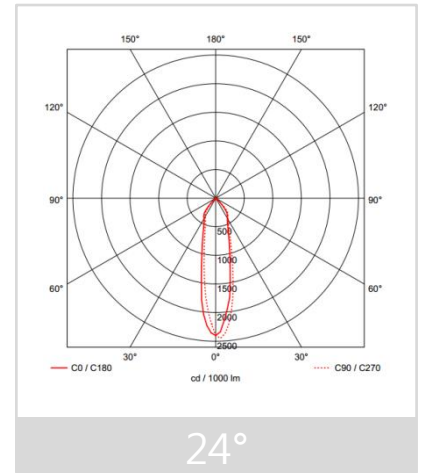


SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable

CGTH-067-0590

MonoRex™

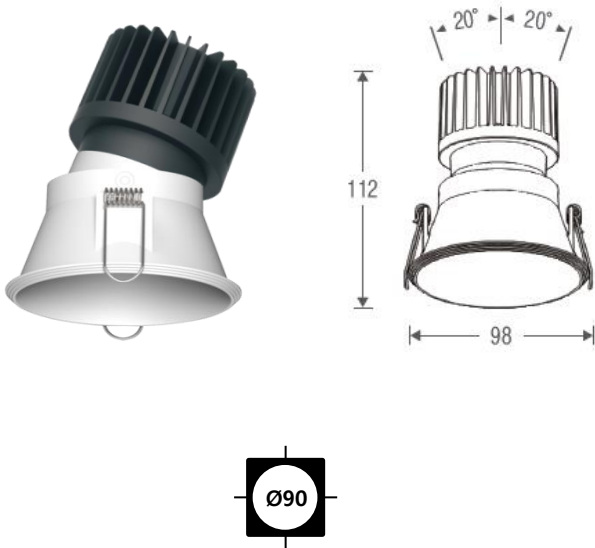

■ White ■ Black


■ Description

Dimension - Ø98xH112mm
Cut Out - Ø90mm
Power Consumption - 8W
Luminous Flux - 576lm
Luminous Efficacy - 72lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 38°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable

■ LED

Manufacturer - Lumileds
Package Series - 1202S

■ Light Distribution

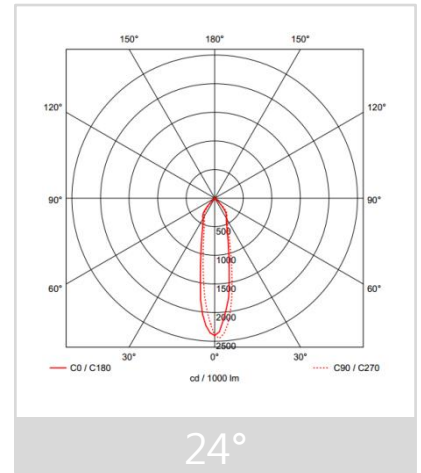


■ SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable

CGTH-118-0590

MonoRex™

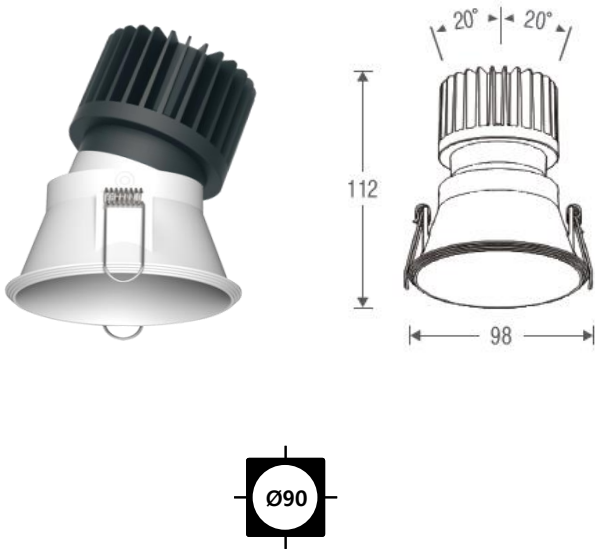

■ White ■ Black


Description

Dimension - Ø98xH112mm
Cut Out - Ø90mm
Power Consumption - 15W
Luminous Flux - 1,020lm
Luminous Efficacy - 68lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 38°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable

LED


Manufacturer - Lumileds
Package Series - 1202S

Light Distribution

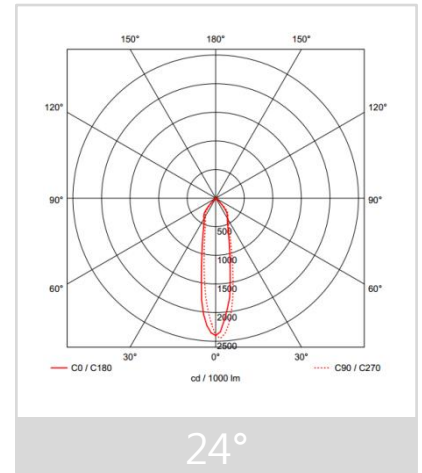

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 15W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 350mA
Control - Switchable

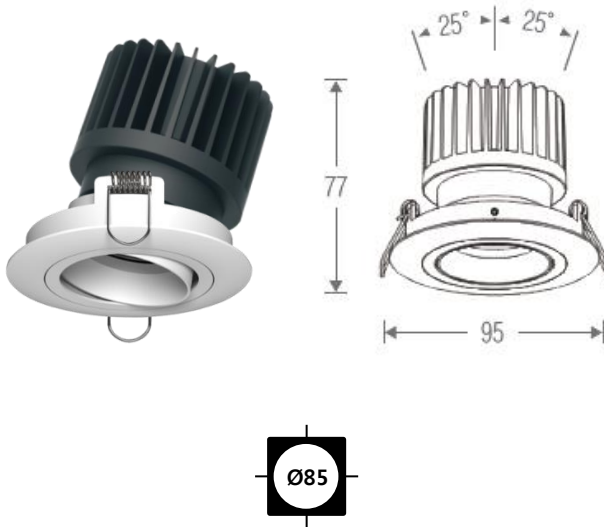

White Black


Description

Dimension - Ø98xH112mm
 Cut Out - Ø85mm
 Power Consumption - 8W
 Luminous Flux - 680lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

LED


Manufacturer - Lumileds
 Package Series - 1202S

Light Distribution

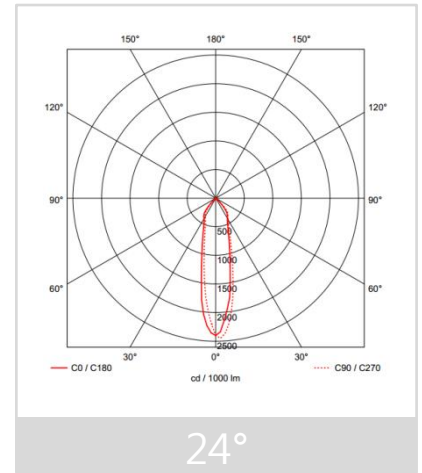

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable

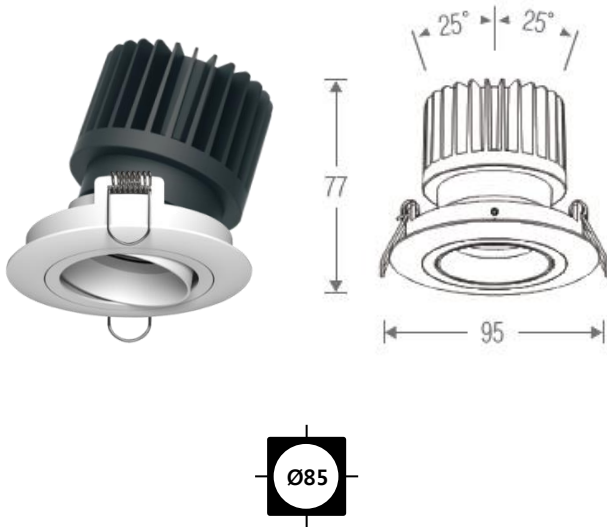

White Black


Description

Dimension - Ø98xH77mm
 Cut Out - Ø85mm
 Power Consumption - 8W
 Luminous Flux - 680lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

LED


Manufacturer - Lumileds
 Package Series - 1202S

Light Distribution

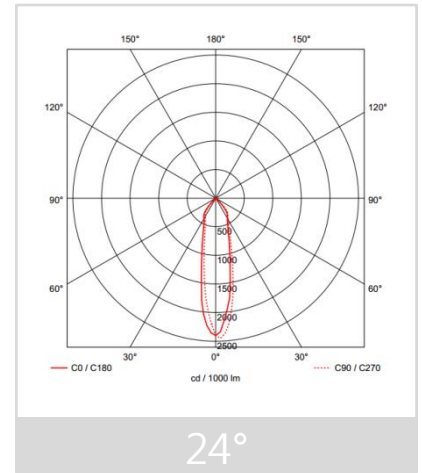

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable

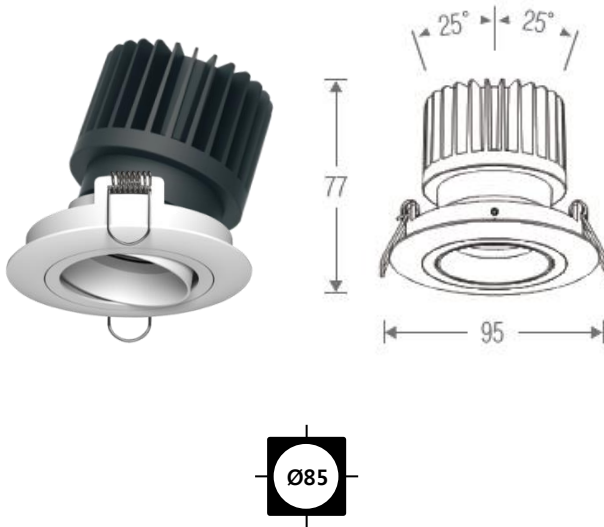

White Black


Description

Dimension - Ø98xH77mm
 Cut Out - Ø85mm
 Power Consumption - 15W
 Luminous Flux - 1,230lm
 Luminous Efficacy - 82lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

LED


Manufacturer - Lumileds
 Package Series - 1202S

Light Distribution

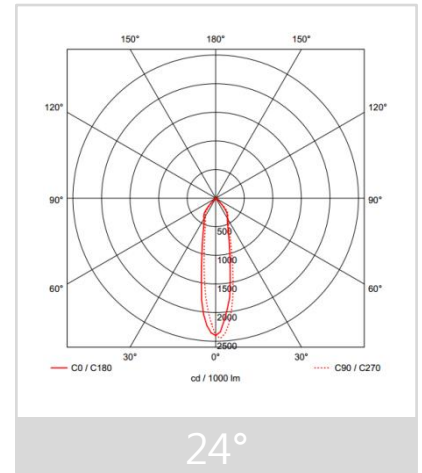

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable

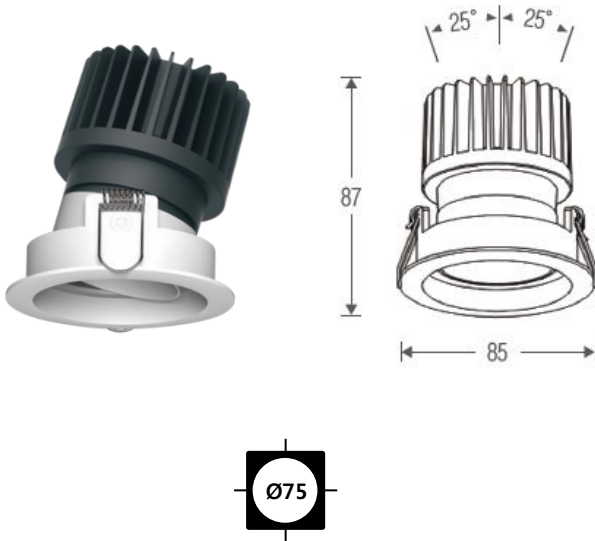

■ White ■ Black


Description

Dimension - Ø85xH87mm
 Cut Out – Ø75mm
 Power Consumption - 15W
 Luminous Flux – 1,230lm
 Luminous Efficacy - 82lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1202S

Light Distribution


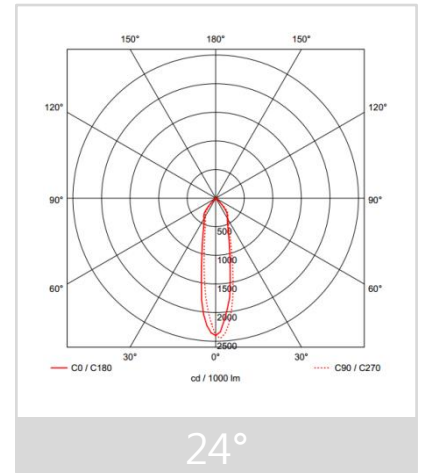


SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable

CGTH-067-0597

MonoRex™



■ White ■ Black


Description

Dimension - Ø95xH87mm
Cut Out - Ø85mm
Power Consumption - 8W
Luminous Flux - 680lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 38°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable

LED



Manufacturer - Lumileds
Package Series - 1202S

Light Distribution

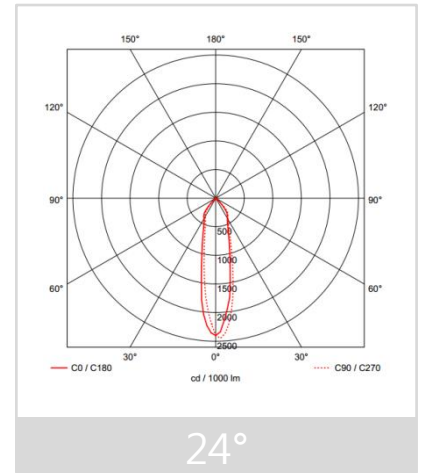

SMPS

Manufacturer - Osram
SMPS Type - External
Dimension - W115×D45×H25mm
Power Consumption - 8W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 21-42V / 180mA
Control - Switchable



■ White ■ Black


Description

Dimension - Ø95xH87mm
 Cut Out - Ø85mm
 Power Consumption - 15W
 Luminous Flux - 1,230lm
 Luminous Efficacy - 82lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

LED


Manufacturer - Lumileds
 Package Series - 1202S

Light Distribution

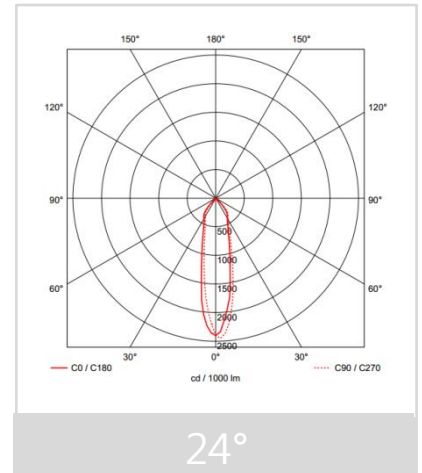


SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable



■ White ■ Gray ■ Black

Light Distribution

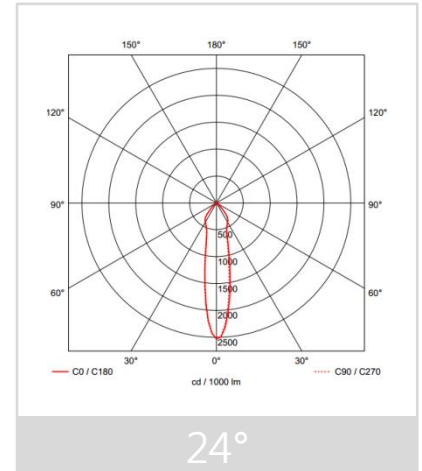

Description



Dimension - Ø75×H90mm
 Cut Out - Ø65mm
 Power Consumption - 8W
 Luminous Flux - 420lm
 Luminous Efficacy - 52lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable


LED

Manufacturer - Epistar
 Package Series - G16-273H0207-0705mA



White Gray Black

Light Distribution

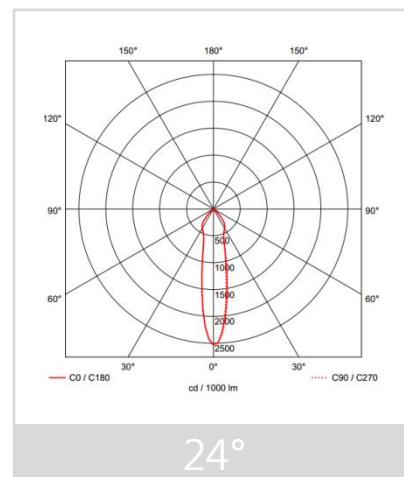

Description



Dimension - Ø85×H80mm
 Cut Out - Ø75mm
 Power Consumption - 8W
 Luminous Flux - 680lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1202S



White Gray Black

Light Distribution

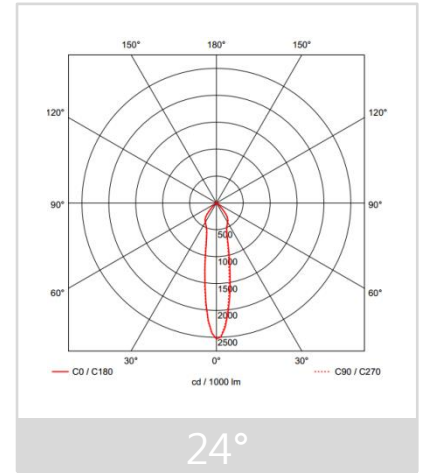

Description

Dimension - Ø85×H80mm
 Cut Out - Ø75mm
 Power Consumption - 15W
 Luminous Flux - 1,230lm
 Luminous Efficacy - 82lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable



SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1202S

Light Distribution

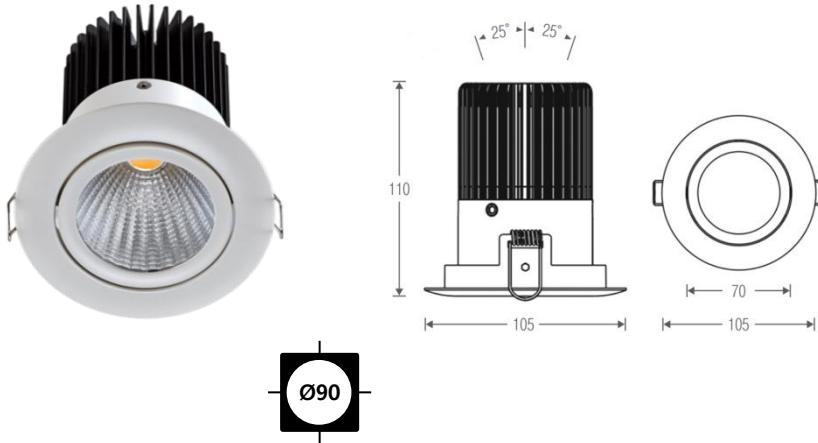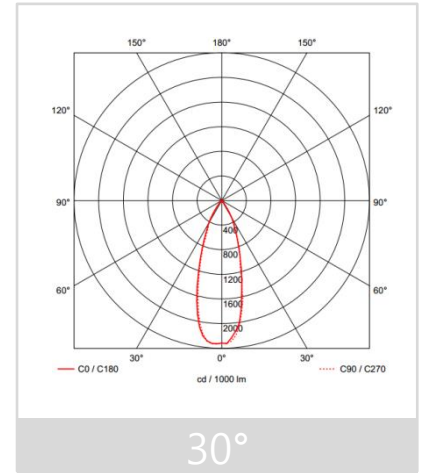

White Gray Black

Description

Dimension - Ø105×H110mm
 Cut Out - Ø90mm
 Power Consumption - 20W
 Luminous Flux - 1,860lm
 Luminous Efficacy - 93lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 16°/ 30°/ 60°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable




SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 500mA
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1204

Light Distribution

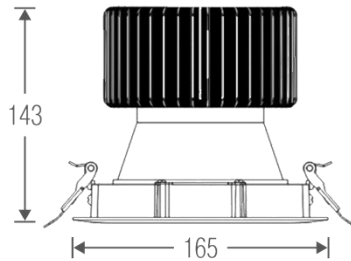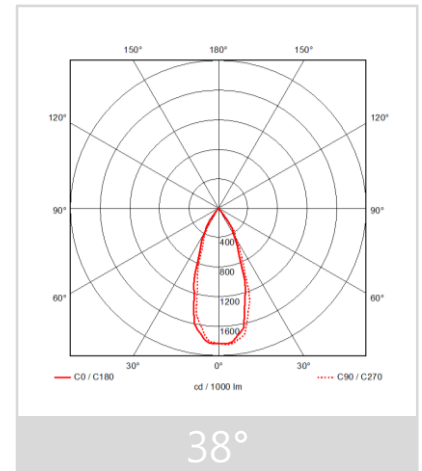

White Gray Black

Description

Dimension - Ø165×H143mm
 Cut Out - Ø155mm
 Power Consumption - 30W
 Luminous Flux - 2,550lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15°/ 38°/ 45°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable




SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 23-42V / 700mA
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1205

Light Distribution

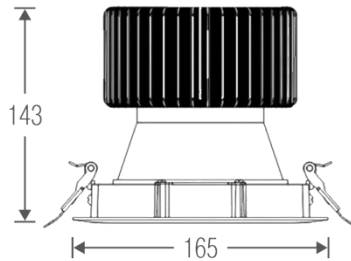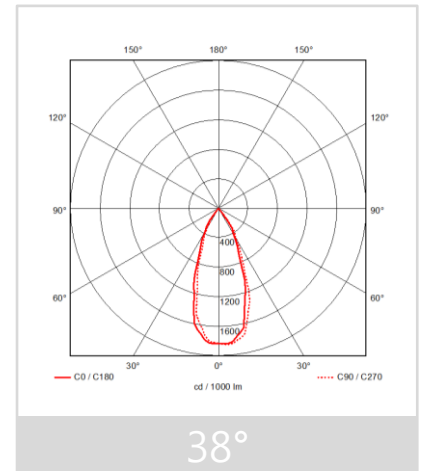

White Gray Black

Description

Dimension - Ø165×H143mm
 Cut Out - Ø155mm
 Power Consumption - 40W
 Luminous Flux - 3,040lm
 Luminous Efficacy - 76lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15°/ 38°/ 45°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 40W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 25-42V / 1050mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1208



■ White ■ Gray ■ Black

Light Distribution

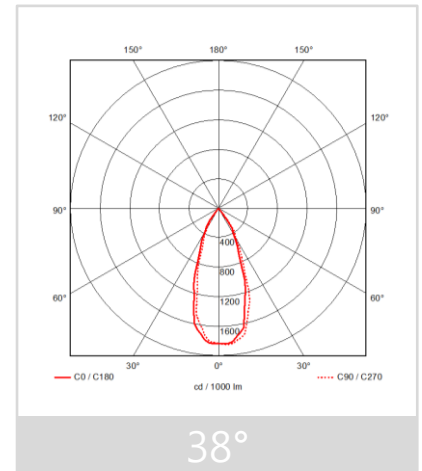

Description

Dimension – Ø115×H132mm
 Cut Out - Ø105mm
 Power Consumption - 20W
 Luminous Flux – 1,600lm
 Luminous Efficacy - 80lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15°/ 38°/ 45°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 20W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 25-42V / 700mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1208



White Gray Black

Light Distribution

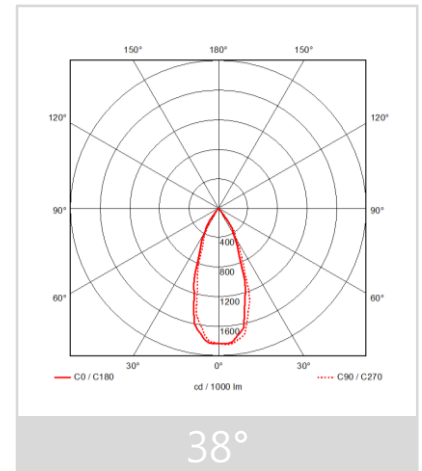

Description



Dimension – Ø115×H132mm
 Cut Out - Ø105mm
 Power Consumption - 30W
 Luminous Flux – 2,550lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15°/ 38°/ 45°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 30W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 25-42V / 700mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1208



White Gray Black

Light Distribution

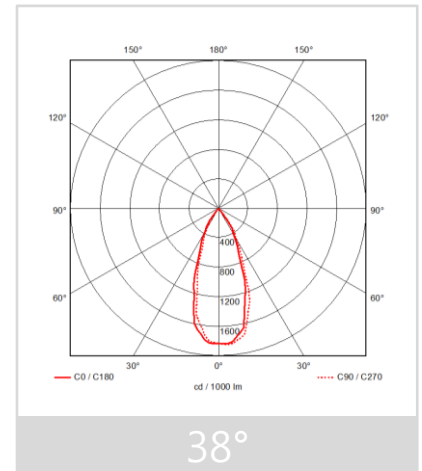

Description



Dimension - Ø165×H143mm
 Cut Out - Ø155mm
 Power Consumption - 30W
 Luminous Flux - 2,460lm
 Luminous Efficacy - 82lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15° / 38° / 45°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 23-42V / 700mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1205



White Gray Black

Light Distribution

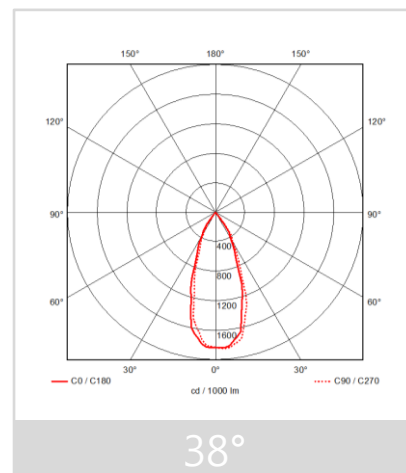

Description


Dimension - Ø165×H143mm
 Cut Out - Ø155mm
 Power Consumption - 40W
 Luminous Flux - 3,480lm
 Luminous Efficacy - 87lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15° / 38° / 45°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 40W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 25-42V / 1050mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1208

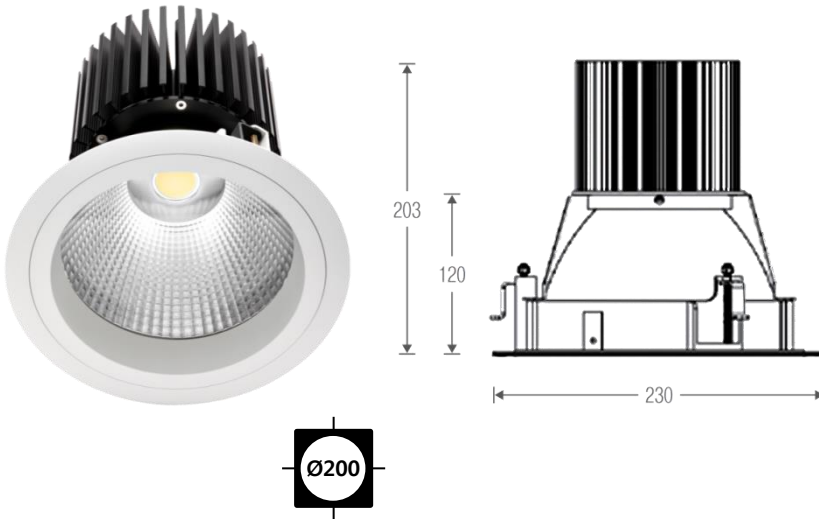

White Gray Black

Light Distribution

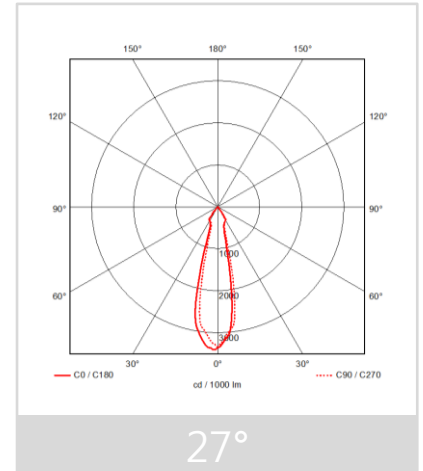

Description


Dimension - Ø230×H203mm
 Cut Out - Ø200mm
 Power Consumption - 60W
 Luminous Flux - 5,520lm
 Luminous Efficacy - 92lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 11° / 27°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Philips
 SMPS Type - External
 Power Consumption - 56W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 35V / 1500mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1208

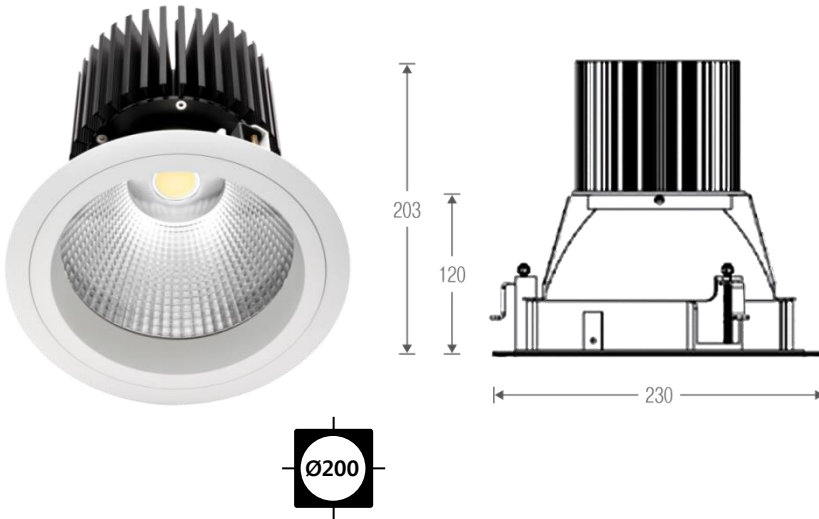

White
 Gray
 Black

Light Distribution

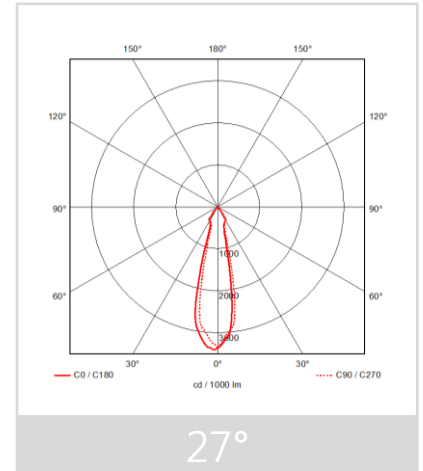

Description



Dimension - Ø230×H203mm
 Cut Out - Ø200mm
 Power Consumption - 100W
 Luminous Flux - 8,900lm
 Luminous Efficacy - 89/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 11° / 27° / 60°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Philips
 SMPS Type - External
 Power Consumption - 100W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 35V / 2500mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1211



White Gray Black

Light Distribution

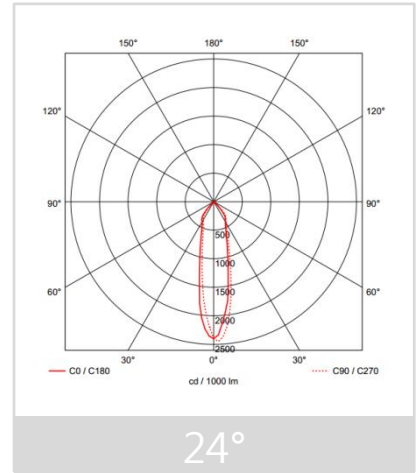

Description



Dimension - W115×D115×H97mm
 Cut Out - 105×105mm
 Power Consumption - 8W
 Luminous Flux - 680lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1204



White Gray Black

Light Distribution

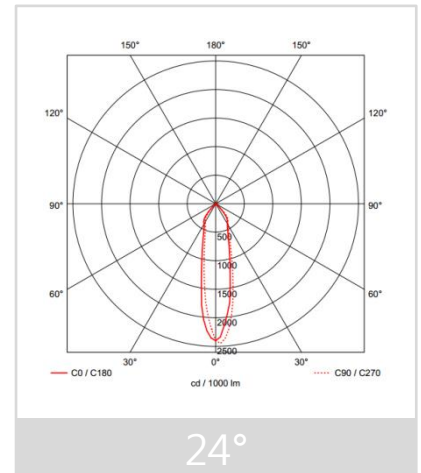

Description


Dimension - W115×D115×H97mm
 Cut Out - 105×105mm
 Power Consumption - 15W
 Luminous Flux - 1,230lm
 Luminous Efficacy - 82lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1204

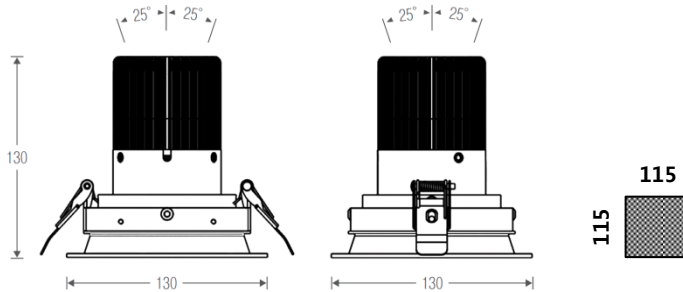

White Gray Black

Light Distribution

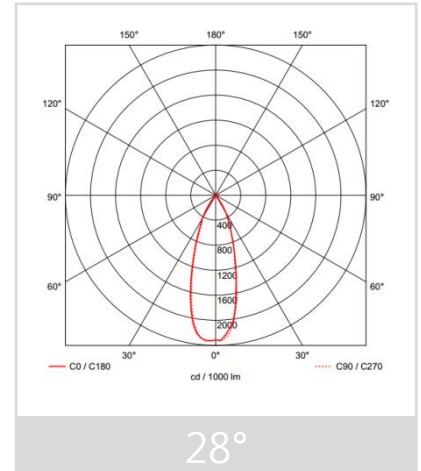

Description


Dimension - W130×D130×H130mm
 Cut Out - 115×115mm
 Power Consumption - 15W
 Luminous Flux - 1,230lm
 Luminous Efficacy - 82lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 28° / 40°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 500mA
 Control - Switchable


LED

Manufacturer - CREE
 Package Series -

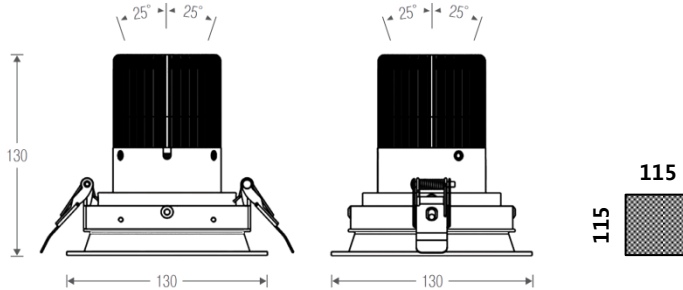

White Gray Black

Light Distribution

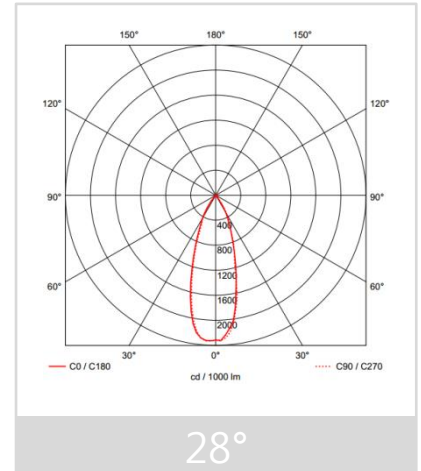

Description


Dimension - W130×D130×H130mm
 Cut Out - 115×115mm
 Power Consumption - 20W
 Luminous Flux - 1,620lm
 Luminous Efficacy - 81lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 28° / 40°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 500mA
 Control - Switchable


LED

Manufacturer - CREE
 Package Series -

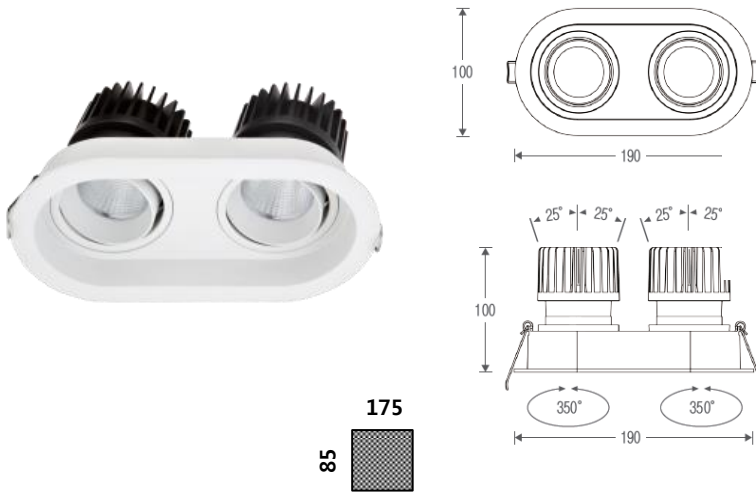

White Gray Black

Light Distribution

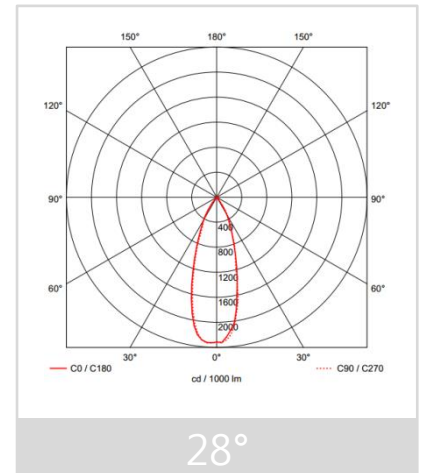

Description


Dimension - W190×D100×H100mm
 Cut Out - 175×85mm
 Power Consumption - 8Wx2
 Luminous Flux - 1,152lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 28° / 40°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8Wx2
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable


LED

Manufacturer - CREE
 Package Series - 2520

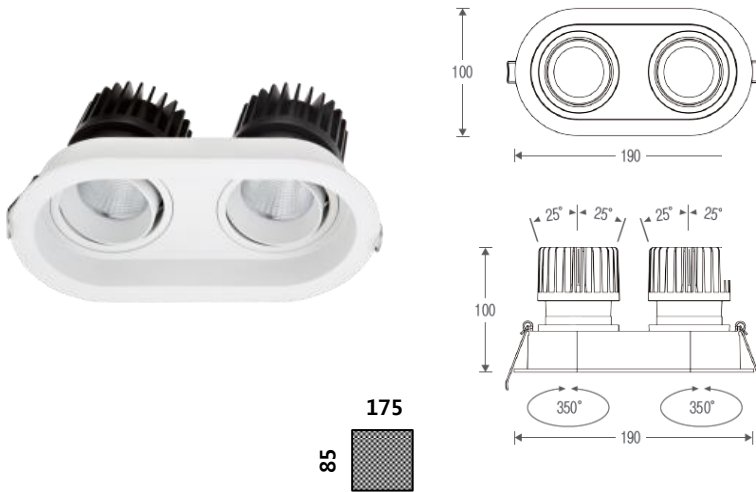

White Gray Black

Light Distribution

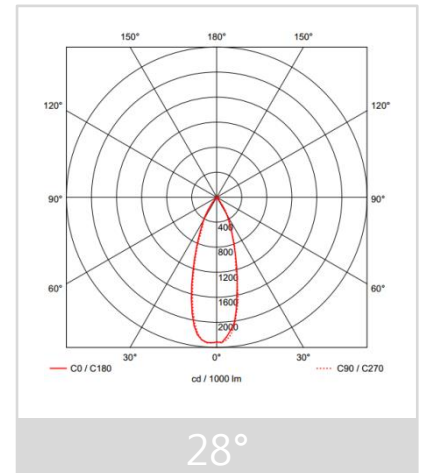

Description



Dimension - W190×D100×H100mm
 Cut Out - 175×85mm
 Power Consumption - 15Wx2
 Luminous Flux - 2,100lm
 Luminous Efficacy - 70lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 28° / 40°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15Wx2
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable


LED

Manufacturer - CREE
 Package Series - 2520

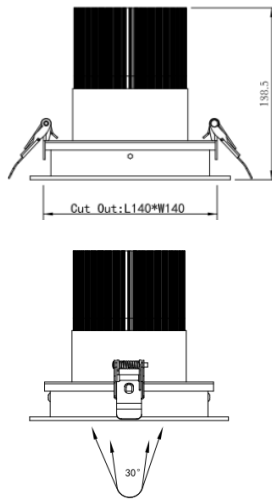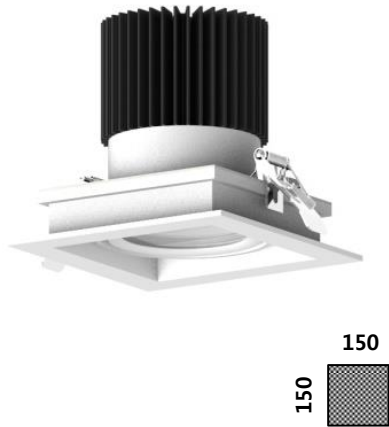

White Gray Black

Light Distribution

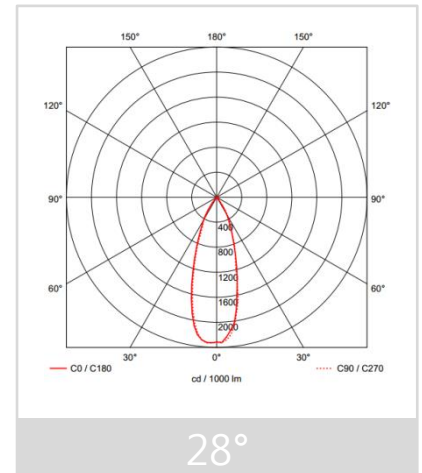

Description



Dimension - W160×D160×H138.5mm
 Cut Out - 150×150mm
 Power Consumption - 30W
 Luminous Flux - 2,550lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 28° / 40°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 23-42V / 700mA
 Control - Switchable


LED

Manufacturer - CREE
 Package Series - 2520

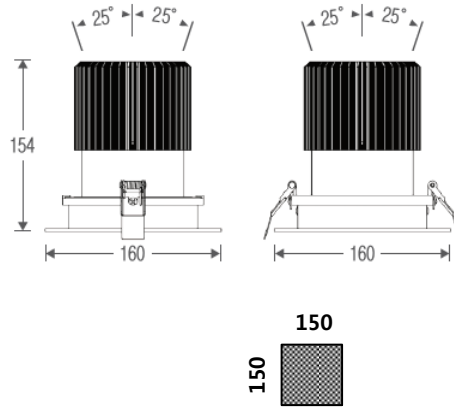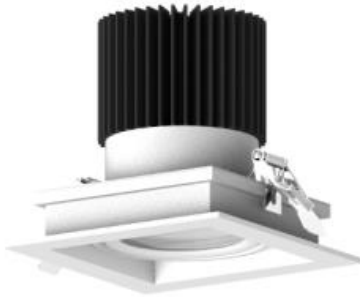

White Gray Black

Light Distribution

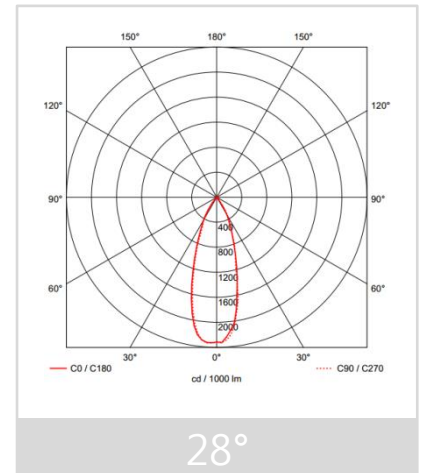

Description

Dimension - W160×D160×H154mm
 Cut Out - 150×150mm
 Power Consumption - 45W
 Luminous Flux - 3,825lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 28° / 40°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS



Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 45W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 30-42V / 1050mA
 Control - Switchable

LED

Manufacturer - Citizen
 Package Series - CLU038-1210



Light Distribution

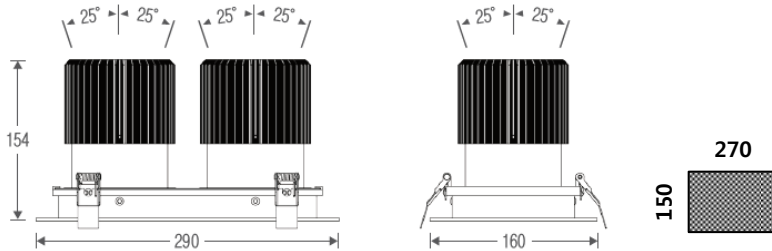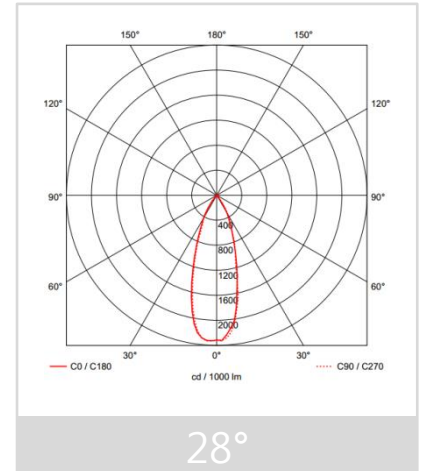

White Gray Black

Description

Dimension - W290×D160×H138.5mm
 Cut Out - 270×150mm
 Power Consumption - 30W×2
 Luminous Flux - 5,100lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 28° / 40°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS



Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 23-42V / 700mA
 Control - Switchable

LED

Manufacturer - CREE
 Package Series - 2520



Light Distribution

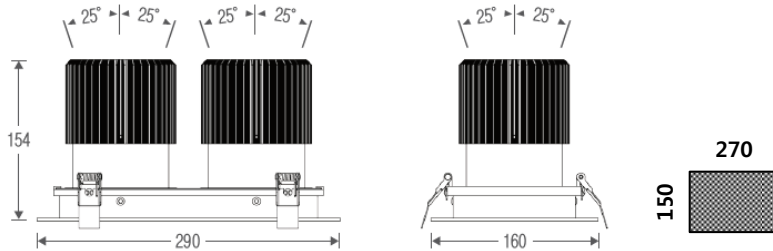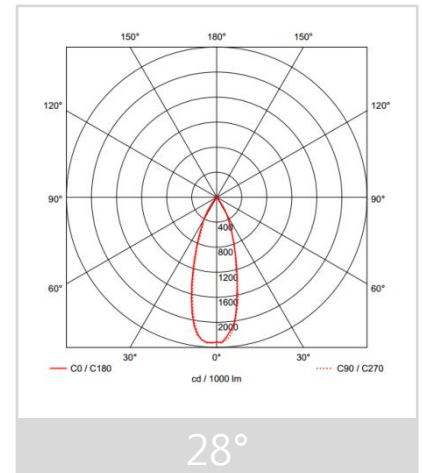

White Gray Black

Description



Dimension - W290×D160×H154mm
 Cut Out - 270×150mm
 Power Consumption - 45W×2
 Luminous Flux - 7,650lm
 Luminous Efficacy - 85lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 28° / 40°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 45W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 30-42V / 1050mA
 Control - Switchable


LED

Manufacturer - Citizen
 Package Series - CLU038-1210

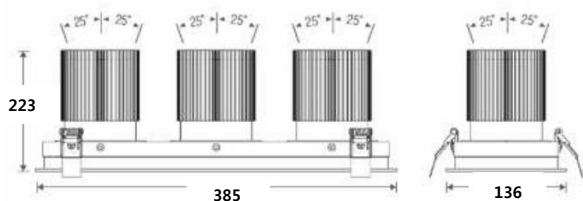

White Gray Black

Light Distribution

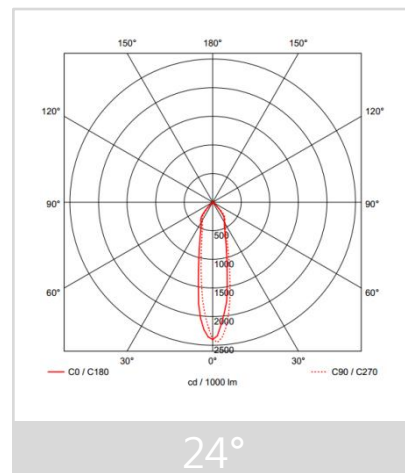

Description


Dimension - W385 x D136 x H223mm
 Cut Out - 375x125mm
 Power Consumption - 28Wx3
 Luminous Flux - 7,053lm
 Luminous Efficacy - 84lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 24°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS


SMPS Type - External
 Power Consumption - 28W x 3
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 750mA
 Control - Switchable

LED


Manufacturer - Citizen
 Package Series - CLU038-1208

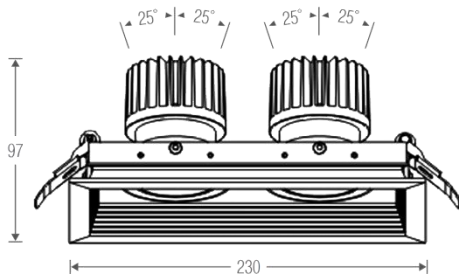

White Gray Black



Light Distribution

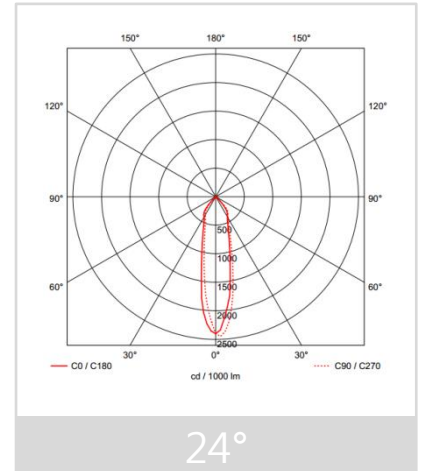

Description


Dimension - W230×D115×H97mm
 Cut Out - 215×100mm
 Power Consumption - 8W×2
 Luminous Flux - 1,152lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS


Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 180mA
 Control - Switchable

LED


Manufacturer - Lumileds
 Package Series - 1204

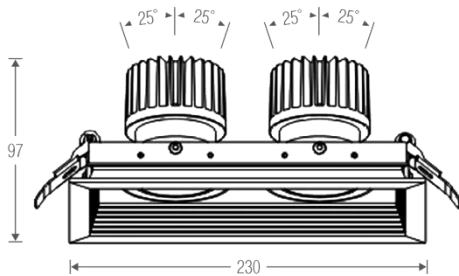

White Gray Black



Light Distribution

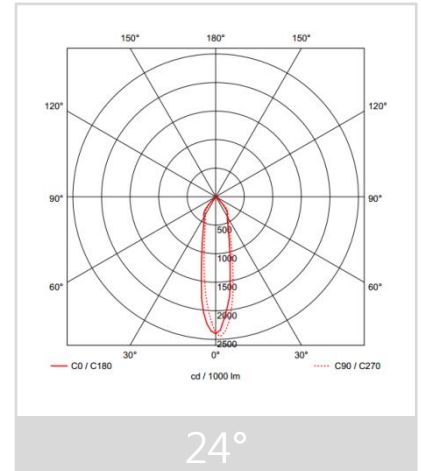

Description


Dimension - W230×D115×H97mm
 Cut Out - 215×100mm
 Power Consumption - 15W×2
 Luminous Flux - 2,160lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1204

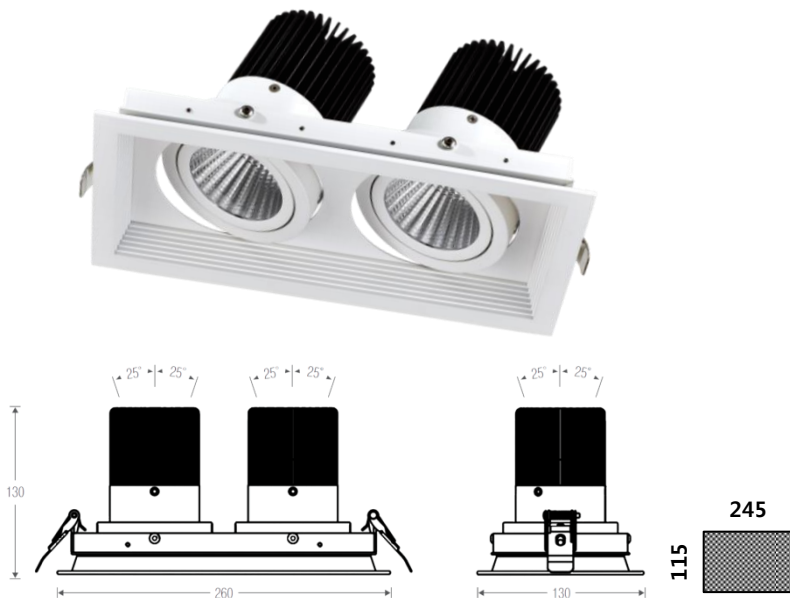

White Gray Black

Light Distribution

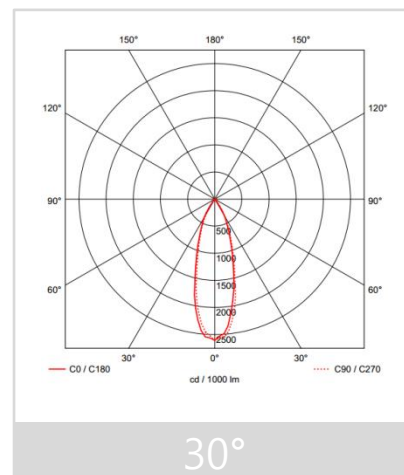

Description


Dimension - W260×D130×H130mm
 Cut Out - 245×115mm
 Power Consumption - 15W×2
 Luminous Flux - 2,340lm
 Luminous Efficacy - 78lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 30° / 50°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1204

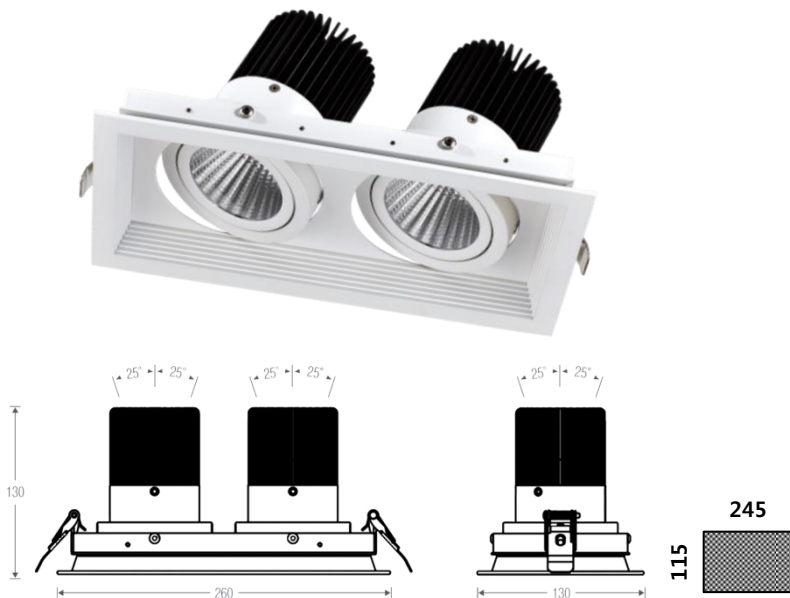

White Gray Black

Light Distribution

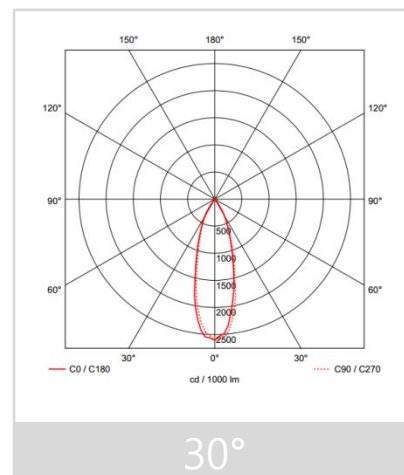

Description


Dimension - W260×D130×H130mm
 Cut Out - 245×115mm
 Power Consumption - 20W×2
 Luminous Flux - 3,120lm
 Luminous Efficacy - 78lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 30° / 50°
 Color Temperature - 3000K 4000K 5000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W115×D45×H25mm
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 500mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1204

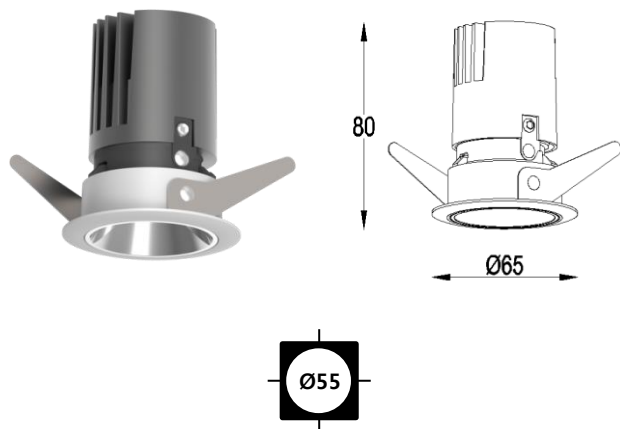

White
 Gray
 Black

Light Distribution

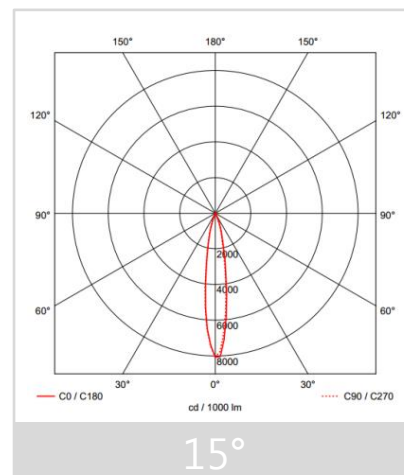

Description


Dimension – Ø65×H80mm
 Cut Out – Ø55mm
 Power Consumption - 7W
 Luminous Flux – 502.3lm
 Luminous Efficacy – 66lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Reflector - Glare
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable / TRIAC Dimmable

SMPS

SMPS Type - External
 Power Consumption - 7W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 180mA
 Control – Switchable

LED

Manufacturer - Bridgelux

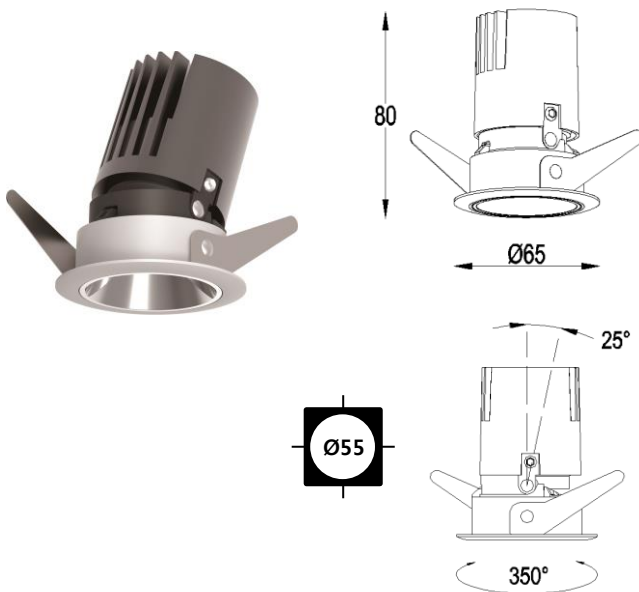

■ White ■ Gray ■ Black


Description

Dimension – Ø65×H80mm
 Cut Out – Ø55mm
 Power Consumption - 7W
 Luminous Flux – 502.3lm
 Luminous Efficacy – 66lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Reflector - Glare
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable / TRIAC Dimmable

LED


Manufacturer - Bridgelux

Light Distribution

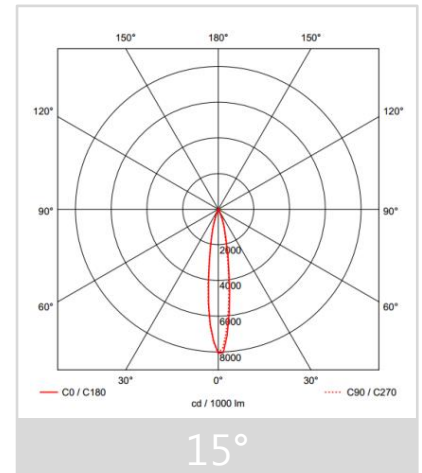


SMPS

SMPS Type - External
 Power Consumption - 7W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 180mA
 Control – Switchable

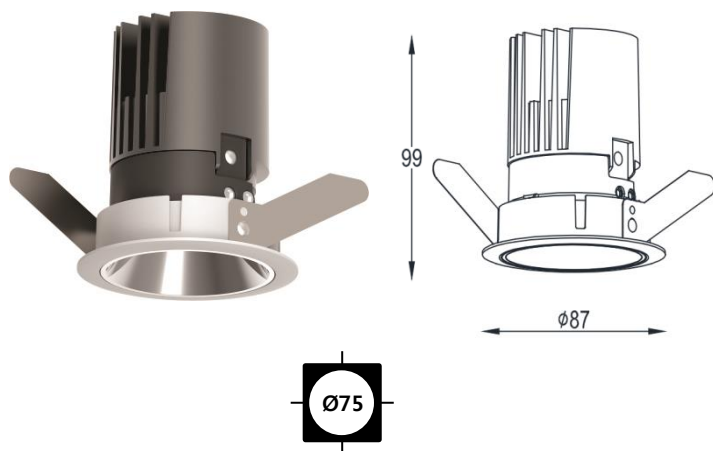

White
 Gray
 Black

Light Distribution

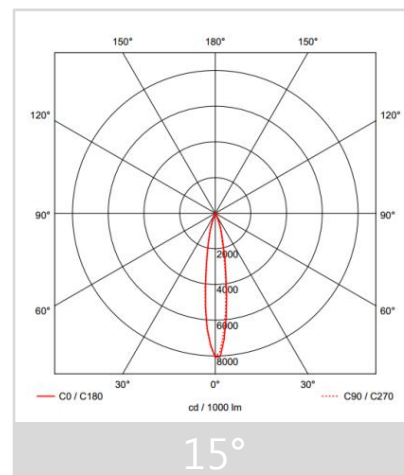

Description

Dimension - Ø87×H99mm
 Cut Out - Ø75mm
 Power Consumption - 8W
 Luminous Flux – 613lm
 Luminous Efficacy – 76.71lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Reflector - Glare
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable / TRIAC Dimmable

SMPS


SMPS Type - External
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 180mA
 Control – Switchable

LED

Manufacturer - Bridgelux



Light Distribution

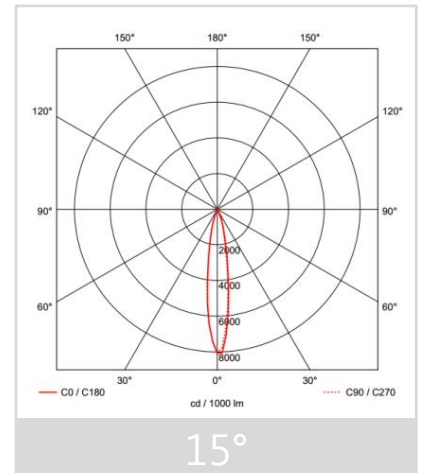

Description


Dimension - Ø87×H99mm
 Cut Out - Ø75mm
 Power Consumption - 8W
 Luminous Flux – 613lm
 Luminous Efficacy – 76.71lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Reflector - Glare
 Beam Angle - 15° / 24° / 36°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable / TRIAC Dimmable

SMPS

SMPS Type - External
 Power Consumption - 8W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 180mA
 Control – Switchable


LED

Manufacturer - Bridgelux

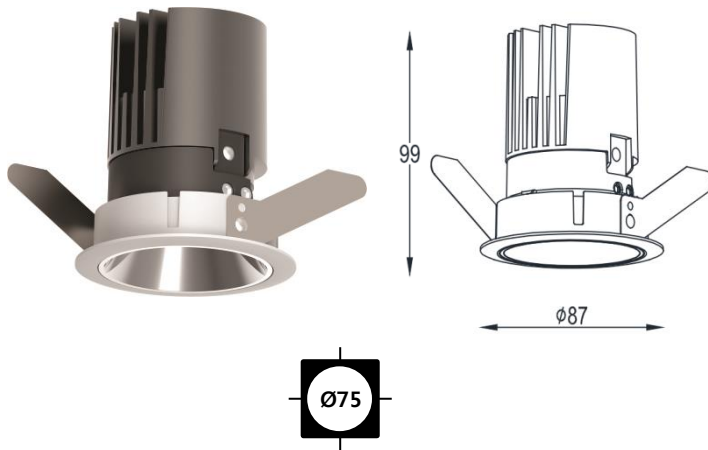

White
 Gray
 Black

Light Distribution

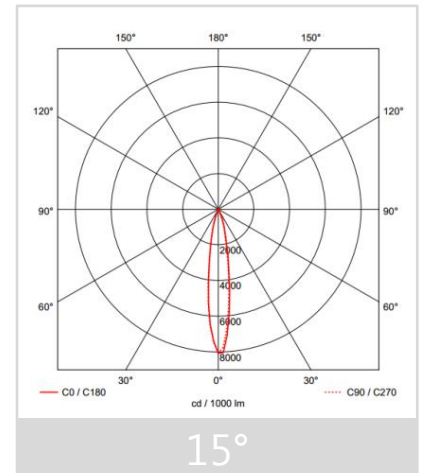

Description

Dimension - Ø87×H99mm
 Cut Out - Ø75mm
 Power Consumption - 15W
 Luminous Flux – 1116.92lm
 Luminous Efficacy – 76.71lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Reflector - Glare
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable / TRIAC Dimmable

SMPS

SMPS Type - External
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 350mA
 Control – Switchable


LED

Manufacturer - Bridgelux



■ White ■ Gray ■ Black

Light Distribution

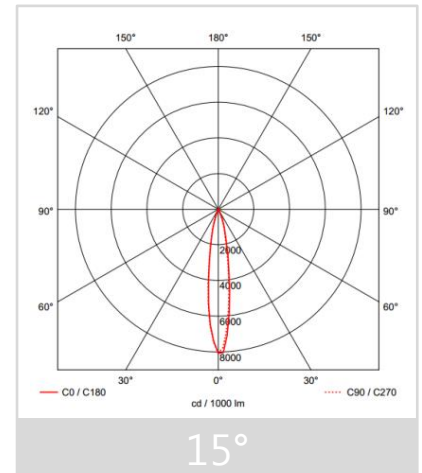

Description



Dimension - Ø87×H99mm
 Cut Out - Ø75mm
 Power Consumption - 15W
 Luminous Flux - 1116.92lm
 Luminous Efficacy - 76.71lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Reflector - Glare
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS

SMPS Type - External
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 350mA
 Control - Switchable


LED

Manufacturer - Bridgelux

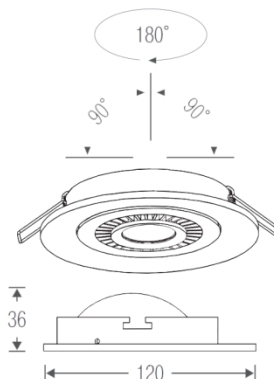

White Gray Black

Light Distribution

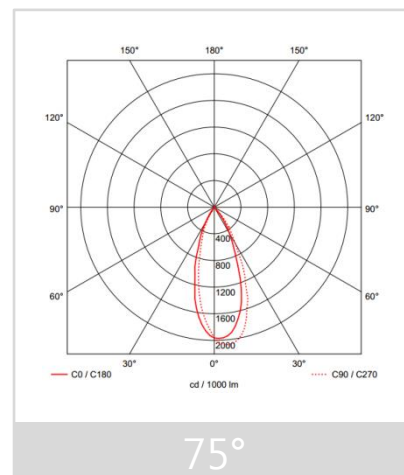

Description




Dimension - Ø120×H36mm
 Cut Out - Ø95mm
 Power Consumption - 7W
 Luminous Flux - 427lm
 Luminous Efficacy - 61lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 75°
 Color Temperature - 3000K 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W80×H36×H23mm
 Power Consumption - 7W
 Input Voltage - AC 110~240V 50~60Hz
 Output Voltage - DC 11V / 550mA
 Control - Switchable


LED

Manufacturer - Epistar
 Package Series - LT-WFRS0803-X07

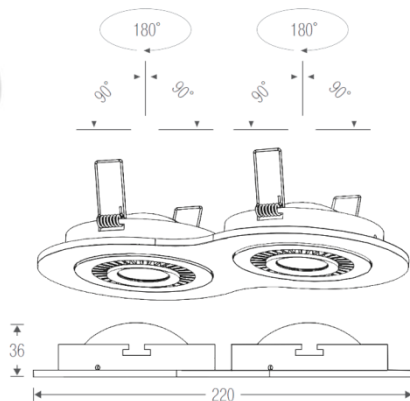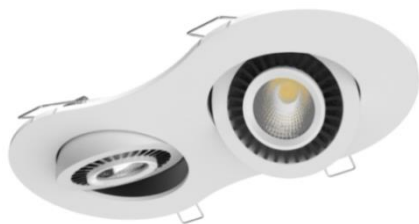

■ White ■ Gray ■ Black

Light Distribution

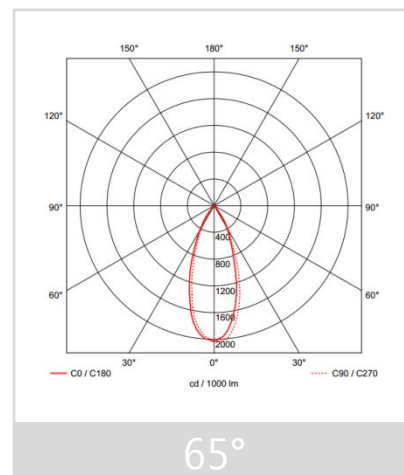

Description




Dimension - W220×D120×H36mm
 Cut Out - Ø95mm×2
 Power Consumption - 7W×2
 Luminous Flux - 1,081lm
 Luminous Efficacy - 77.2lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 65°
 Color Temperature - ■ 3000K ■ 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W80×H36×H23mm
 Power Consumption - 7W
 Input Voltage - AC 110-240V / 50-60Hz
 Output Voltage - DC 11V / 550mA
 Control - Switchable


LED

Manufacturer - Epistar
 Package Series - LT-WFRS0803-X07



■ White ■ Black

Light Distribution

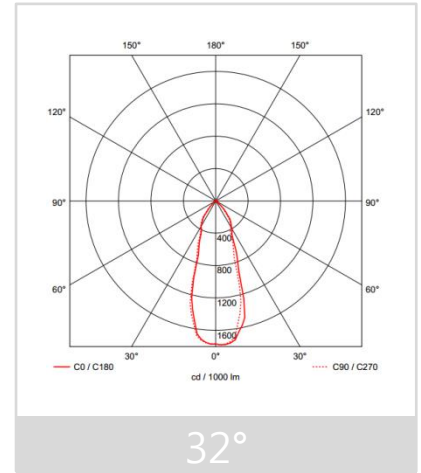

Description



Dimension - W310×D170×H153mm
 Cut Out - 285×150mm
 Power Consumption - 30W×2
 Luminous Flux - 4,500lm
 Luminous Efficacy - 75lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 24° / 32° / 50°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Power Consumption - 30W
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 38V / 700mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1205

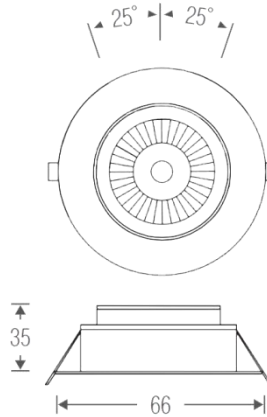

■ White ■ Gray ■ Black

Light Distribution

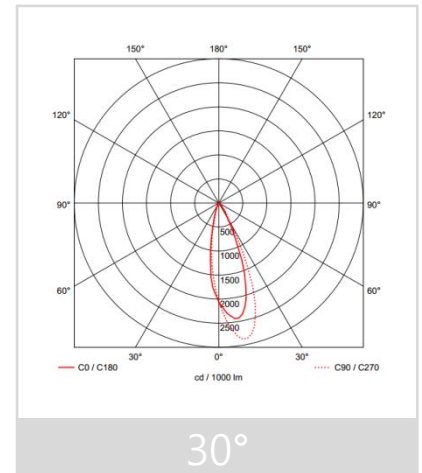

Description

Dimension - Ø66×H35mm
 Cut Out - Ø55mm
 Power Consumption - 3W
 Luminous Flux - 142lm
 Luminous Efficacy - 47.3lm/W
 Material - Body: Aluminum
 Beam Angle - 30°
 Color Temperature - ■ 3000K ■ 6000K
 CRI - Ra >80
 Life Time - 30,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS


Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W80×D36×H23mm
 Power Consumption - 7W
 Input Voltage - AC 100~240V 50~60Hz
 Output Voltage - DC 3V / 600mA
 Control - Switchable / TRIAC Dimmable

LED

Manufacturer - Epistar
 Package Series - LT-DD0205-X05


MR-RR003I-007EXKWH

MonoRex™

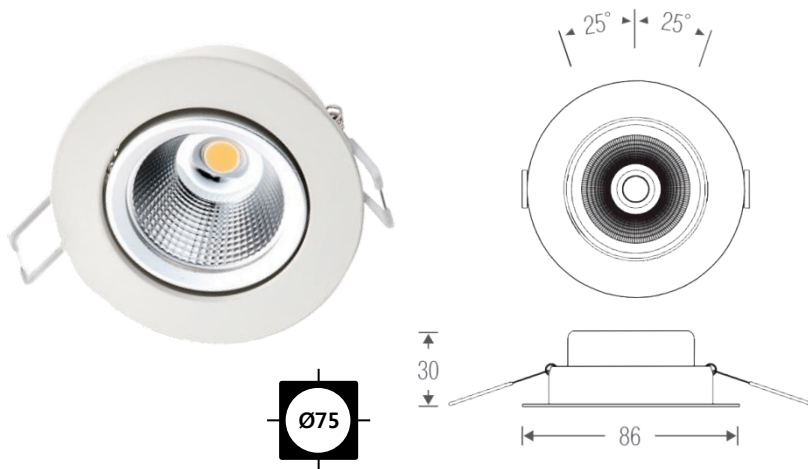

■ White ■ Gray ■ Black

Light Distribution

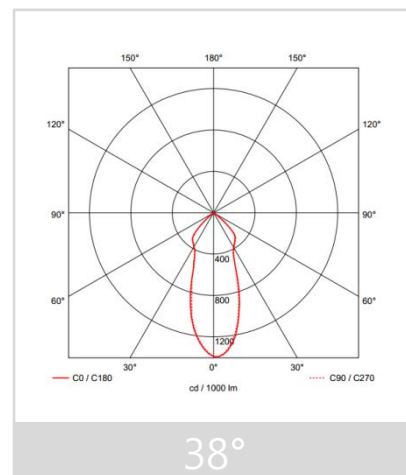

Description


Dimension - Ø86×H30mm
Cut Out - Ø75mm
Power Consumption - 7W
Luminous Flux - 604.8lm
Luminous Efficacy - 86.4lm/W
Material - Body: Aluminum
Beam Angle - 15° / 24° / 38°
Color Temperature - ■ 3000K ■ 6000K
CRI - Ra >80
Life Time - 35,000hrs
Control - Switchable / TRIAC / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
SMPS Type - External
Dimension - W80×D36×H23mm
Power Consumption - 7W
Input Voltage - AC 100~240V 50~60Hz
Output Voltage - DC 21V / 230mA
Control - Switchable / TRIAC / Wireless Dimmable


LED

Manufacturer - Epistar
Package Series - LT-DD0205-X07

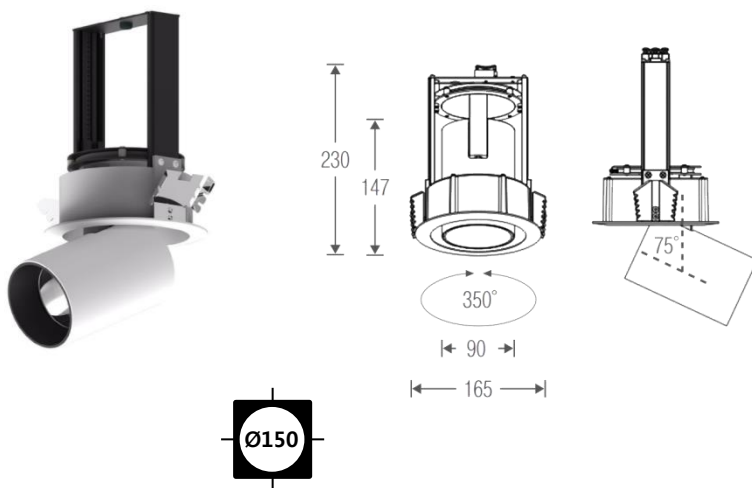

White Gray Black

Light Distribution

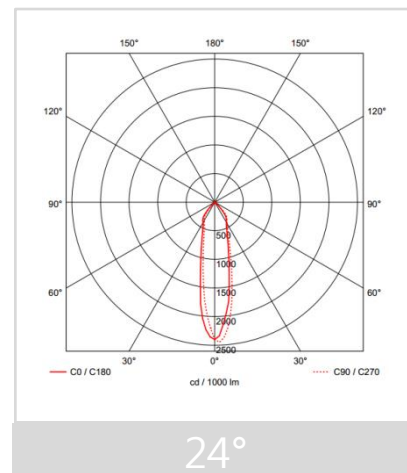

Description


Dimension - Ø165×H230mm
 Cut Out - Ø150mm
 Power Consumption - 30W
 Luminous Flux - 2,160lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15°/ 24°/ 40°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 30,000hrs

SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 23-42V / 700mA
 Control - Switchable


LED

Manufacturer - Lumileds
 Package Series - 1205

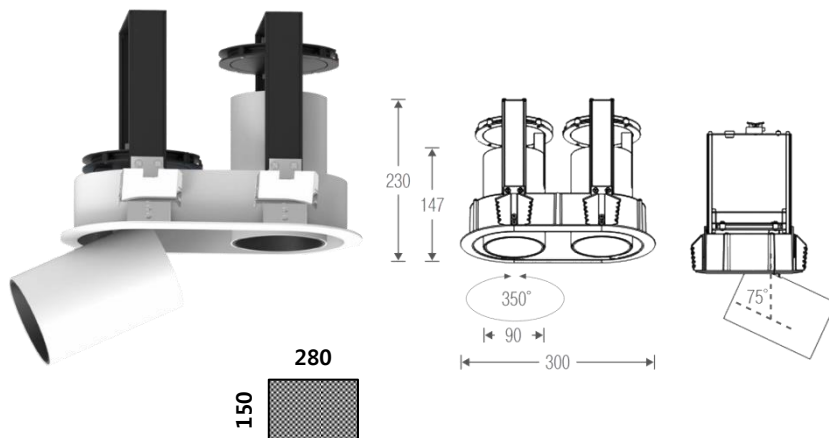

White Gray Black

Light Distribution

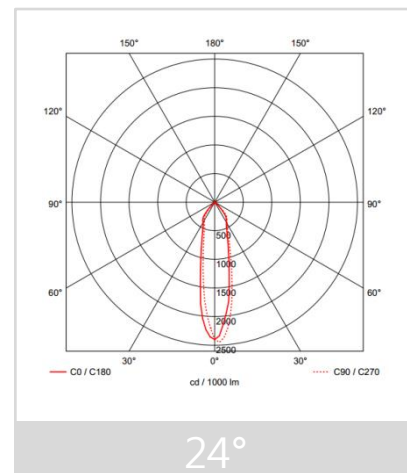

Description


Dimension - W300×D165×H230mm
 Cut Out - 280×150mm
 Power Consumption - 30W×2
 Luminous Flux - 4,320lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15°/ 24°/ 40°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 30,000hrs

SMPS


Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 23-42V / 700mA
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - 1205

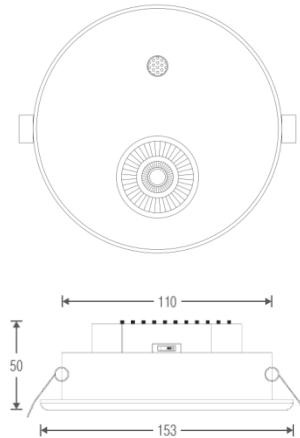

Light Distribution

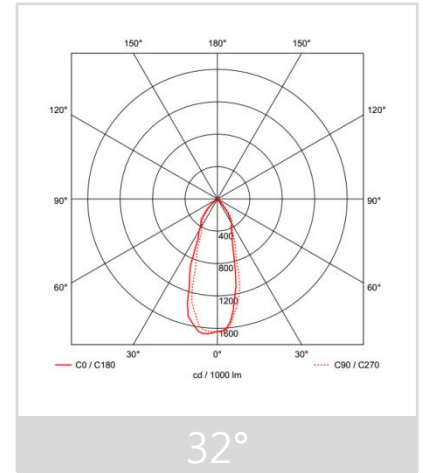

White

Description

Dimension - Ø153×H50mm
 Cut Out - Ø125mm
 Power Consumption - 5W
 Luminous Flux - 425lm
 Luminous Efficacy - 85lm/W
 Input Voltage - AC 220-240V / 50-60Hz
 Material - Body: Aluminum / Cover: PVC, Clear Glass
 Beam Angle - 32°
 Color Temperature - 3000K 6000K (Discontinued)
 CRI - Ra >80
 Life Time - 30,000hrs
 Control - Switchable


LED

Manufacturer - Epistar

Sensor




1. 주위 조도와 무관하게 점등
2. 주위 조도가 약 50Lux ± 10Lux 미만 (해질 무렵)에서만 점등
- 기본 설정 위치
3. 주위 조도가 약 20Lux ± 10Lux 미만 (해가 지고 난 후)에서만 점등
- 절전 모드 위치

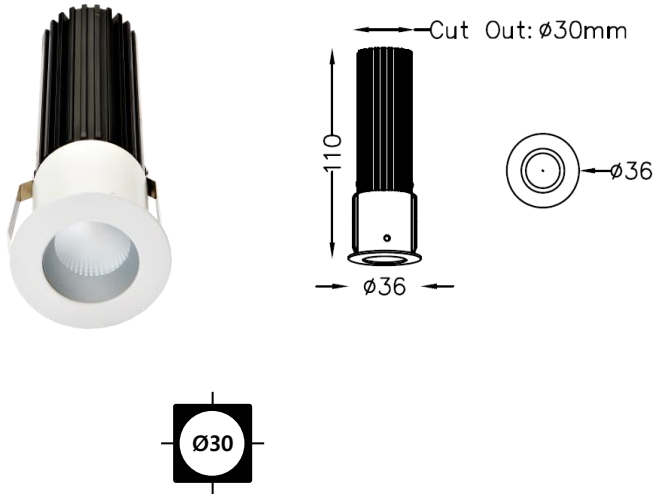

White

Light Distribution

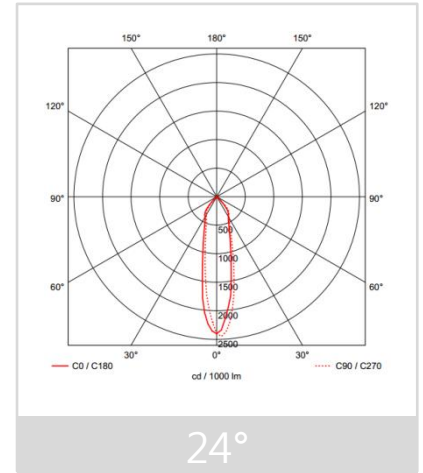

Description



Dimension – Ø36×H110mm
 Cut Out – Ø30mm
 Power Consumption - 10W
 Luminous Flux - 380lm
 Luminous Efficacy - 38lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 6000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable
 Certifications - KC / RoHS

SMPS

SMPS Type - External
 Power Consumption - 10W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 12V / 700mA
 Control - Switchable


LED

Manufacturer - CREE
 Package Series – XHP35



White

Light Distribution

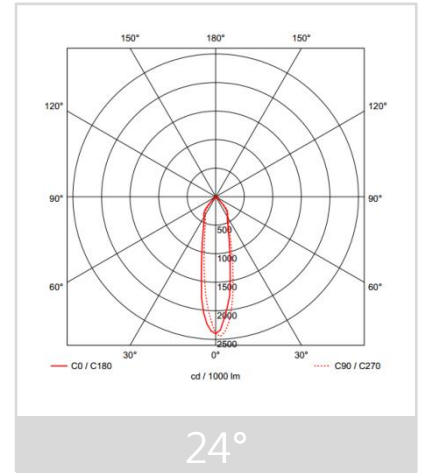

Description


Dimension – Ø45×H110mm
 Cut Out – Ø40mm
 Power Consumption - 10W
 Luminous Flux - 380lm
 Luminous Efficacy - 38lm/W
 Material - Body: Aluminum / Cover: Polycarbonate
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 3000K 4000K 6000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable
 Certifications - KC / RoHS

SMPS

SMPS Type - External
 Power Consumption - 10W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 12V / 700mA
 Control - Switchable

LED

Manufacturer - CREE
 Package Series – XHP35

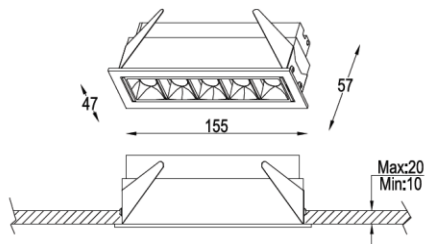

■ Black ■ White


Description

Dimension – L155 x W47 x H57mm
 Cut Out – L148 x W40 x H100
 Power Consumption - 12W
 Luminous Flux - 840lm
 Luminous Efficacy - 70lm/W
 Material - Body: Aluminum
 Beam Angle - 15° / 30° / 45°
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

LED


Manufacturer - Osram

Light Distribution

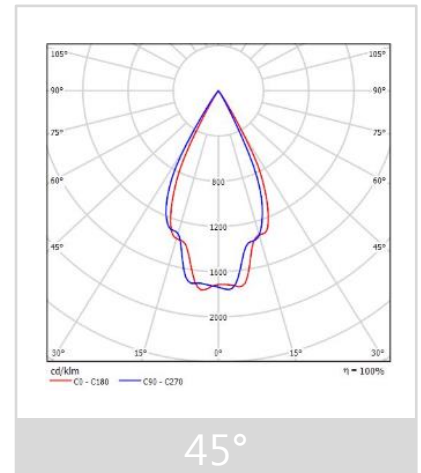

SMPS

SMPS Type - External
 Power Consumption - 12W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 15V / 700mA
 Control - Switchable

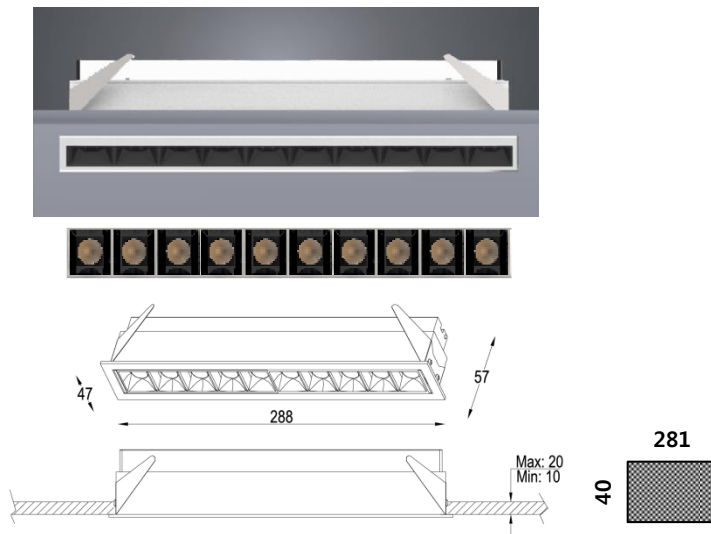

■ Black ■ White


Description

Dimension - L288 x W47 x H57mm
 Cut Out - L281 x W40 x H100
 Power Consumption - 24W
 Luminous Flux - 1,680lm
 Luminous Efficacy - 70lm/W
 Material - Body: Aluminum
 Beam Angle - 15° / 30° / 45°
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Osram

Light Distribution

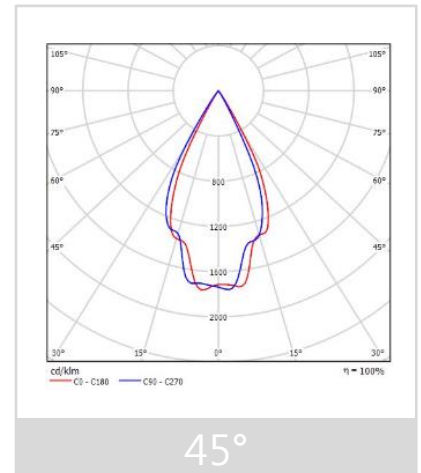


SMPS

Manufacturer - Osram
 SMPS Type - External
 Dimension - W97×D43×H29.5mm
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 30V / 700mA
 Control - Switchable


TRIMLESS 5구

MonoRex™

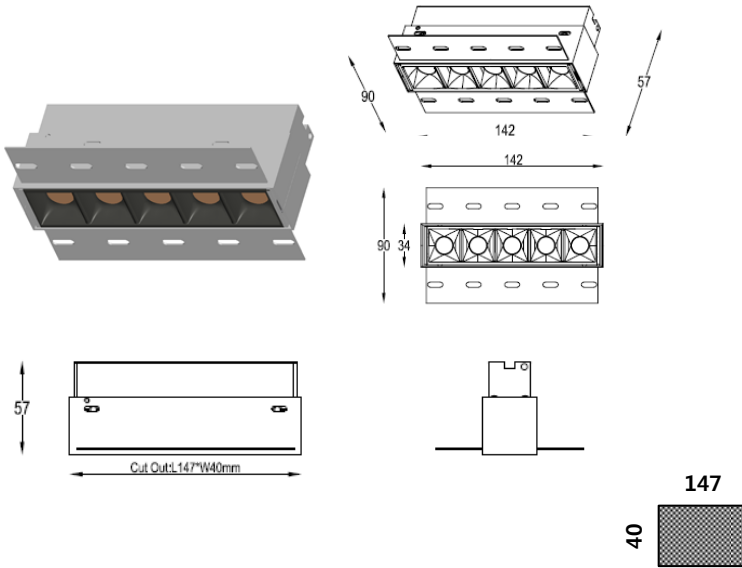

White Gray Black

Light Distribution

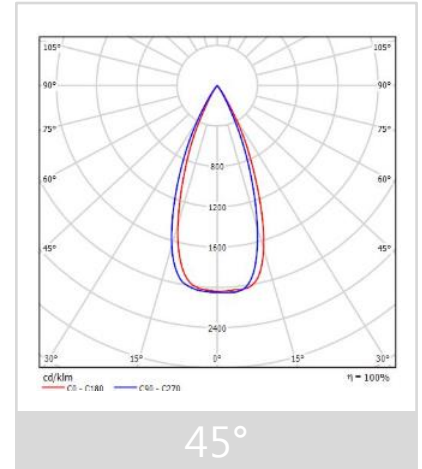

Description

Dimension - L142 x W90 x H57mm
 Cut Out - L147 x W40 x H100mm
 Power Consumption - 14W
 Luminous Flux - 827lm
 Luminous Efficacy - 64lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 30° / 45°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable

SMPS


SMPS Type - External
 Power Consumption - 14W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 15V / 800mA
 Control - Switchable

LED

Manufacturer - Osram


TRIMLESS 10구

MonoRex™

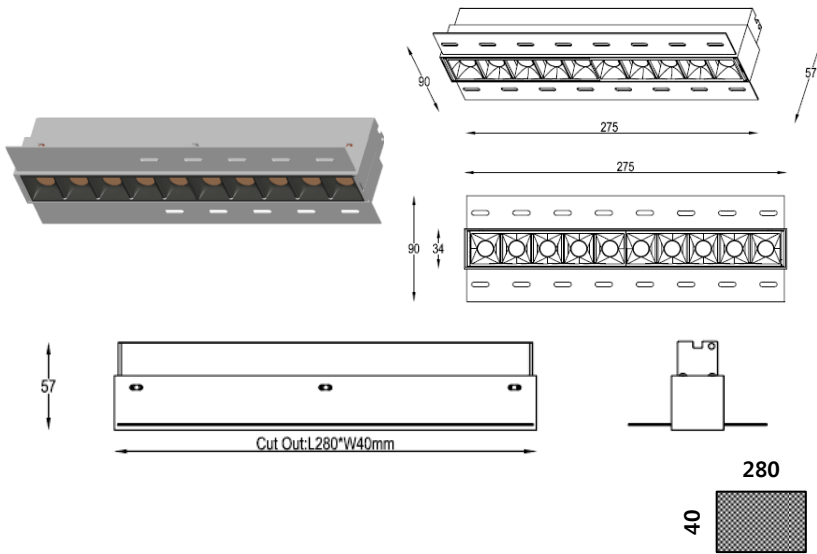

■ White ■ Gray ■ Black

Light Distribution

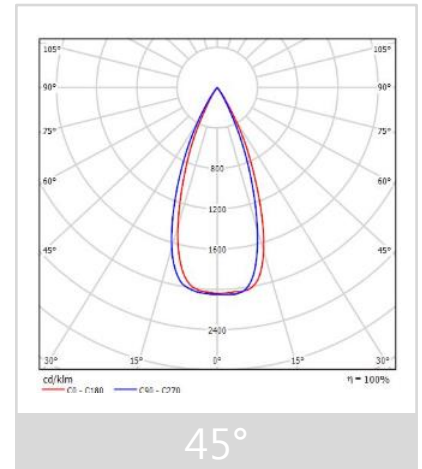

Description


Dimension - L275 x W90 x H57mm
Cut Out - L280 x W40 x H100mm
Power Consumption - 27W
Luminous Flux - 1,677lm
Luminous Efficacy - 64lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 30° / 45°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra 90
Life Time - 35,000hrs
Control - Switchable

SMPS

SMPS Type - External
Power Consumption - 27W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 30V / 800mA
Control - Switchable


LED

Manufacturer - Osram

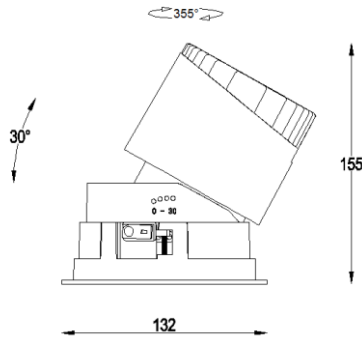

■ White ■ Gray ■ Black

Light Distribution

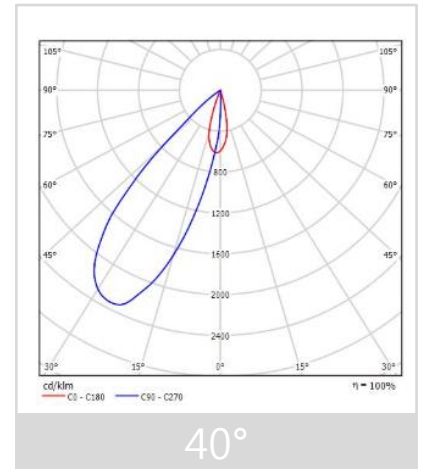

Description


Dimension - Ø132 x H155mm
 Cut Out - Ø120mm
 Power Consumption – 40W
 Luminous Flux – 2,958lm
 Luminous Efficacy - 70lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 20° / 28° / 40°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS

SMPS Type - External
 Power Consumption – 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage – DC 36V / 1,050mA
 Control - Switchable


LED

Manufacturer – Lumileds
 Package Series – COB L08

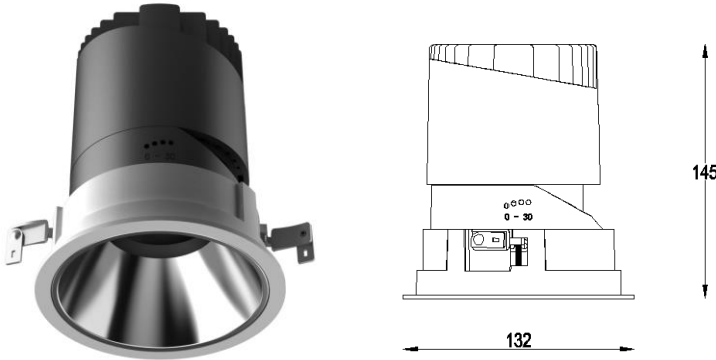

■ White ■ Gray ■ Black

Light Distribution

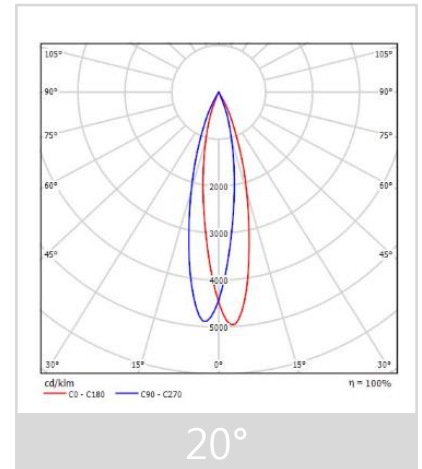

Description


Dimension - Ø132 x H145mm
 Cut Out - Ø120mm
 Power Consumption – 40W
 Luminous Flux – 2,958lm
 Luminous Efficacy - 70lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 20° / 28° / 40°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS

SMPS Type - External
 Power Consumption – 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage – DC 36V / 1,050mA
 Control - Switchable


LED

Manufacturer – Lumileds
 Package Series – COB L08

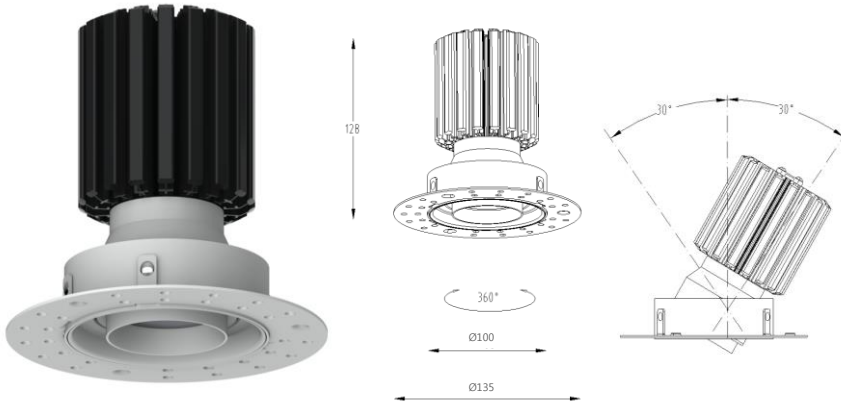

■ White ■ Black

Light Distribution

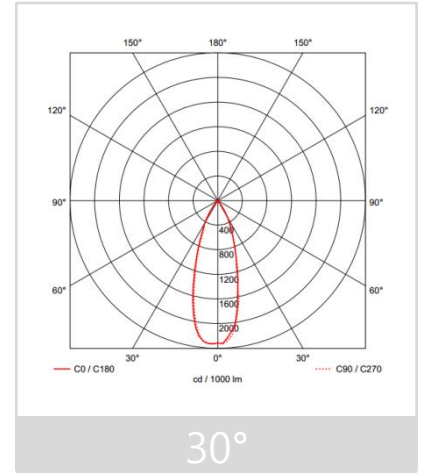

Description


Dimension – Ø135 x H128mm
 Cut out – Ø100 x H135mm
 Power Consumption – 28W
 Luminous Flux – 1,960lm
 Luminous Efficacy – 70lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 16° / 30° / 60°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable

SMPS

SMPS Type – External
 Power Consumption – 28W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 700mA
 Control - Switchable


LED

Manufacturer – CREE

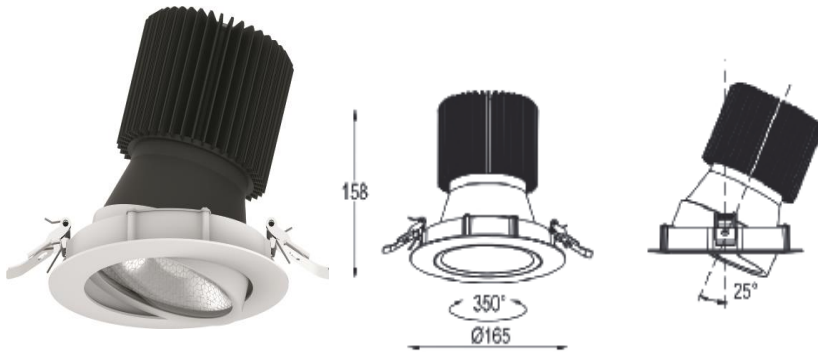

■ White ■ Black

Light Distribution

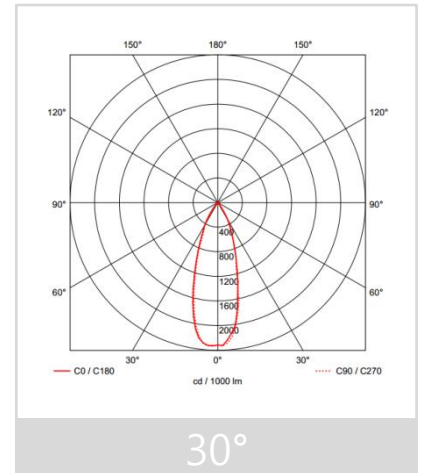

Description


Dimension – Ø165 x H158mm
 Cut out – Ø155 x H165mm
 Power Consumption – 50W
 Luminous Flux – 3,750lm
 Luminous Efficacy – 75lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 16° / 30° / 60°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable

SMPS

SMPS Type – External
 Power Consumption – 50W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 1,250mA
 Control - Switchable

LED

Manufacturer – CREE

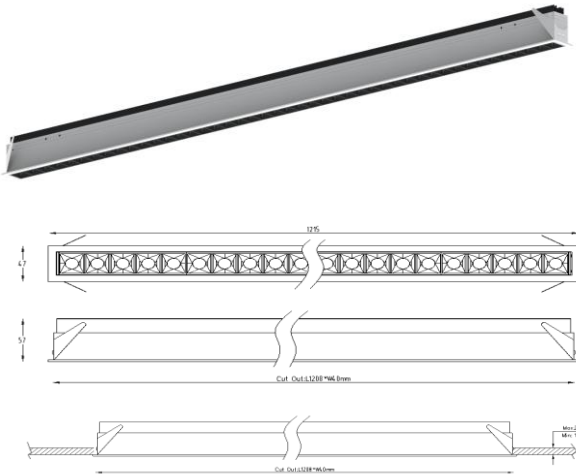

White Black


Description

Dimension – L1,215 x W47 x H57mm
 Cut out – L1,208 x W40 x H60mm
 Power Consumption – 30W
 Luminous Flux – 2,010lm
 Luminous Efficacy – 67lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 30° / 45°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable

LED


Manufacturer – CREE

Light Distribution

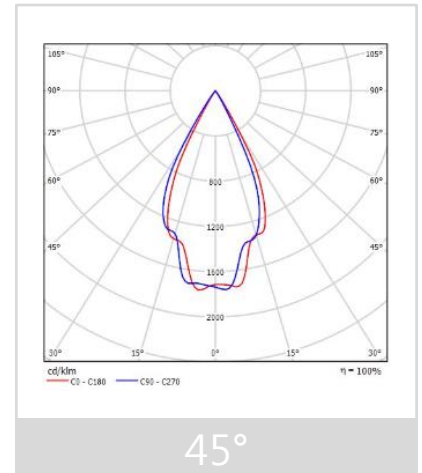


SMPS

SMPS Type – External
 Power Consumption – 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 30V / 900mA
 Control - Switchable

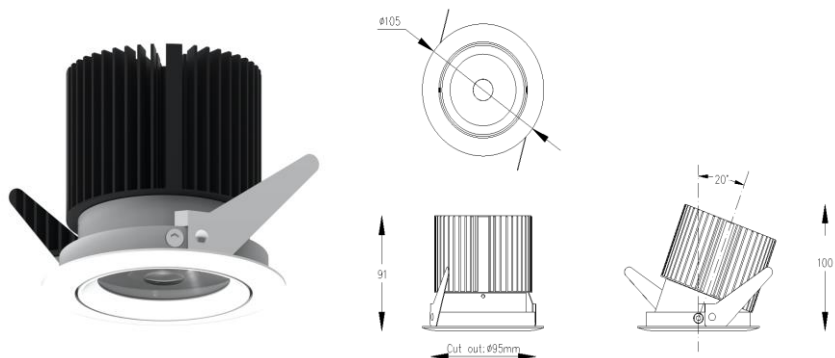

■ White ■ Black

Light Distribution

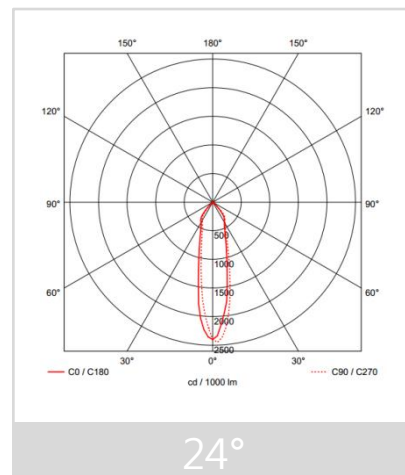

Description


Dimension – Ø105 x H91mm
 Cut out – Ø95 x H100mm
 Power Consumption – 20W
 Luminous Flux – 1,600lm
 Luminous Efficacy – 80lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 36° / 60°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable

SMPS

SMPS Type – External
 Power Consumption – 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 500mA
 Control - Switchable


LED

Manufacturer – Lumileds

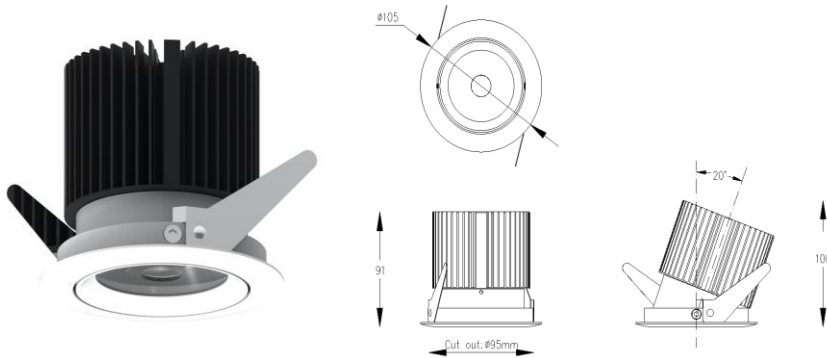

■ White ■ Black

Light Distribution

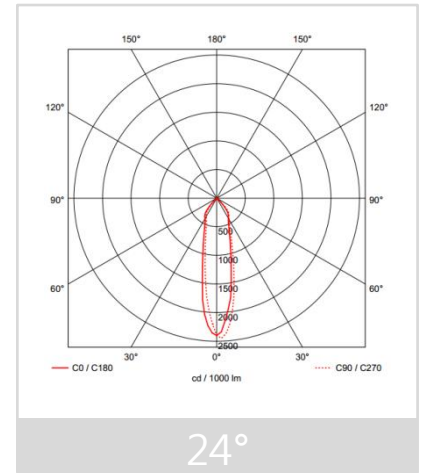

Description

Dimension – Ø105 x H91mm
 Cut out – Ø95 x H100mm
 Power Consumption – 28W
 Luminous Flux – 2,240lm
 Luminous Efficacy – 80lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 36° / 60°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable

SMPS

SMPS Type – External
 Power Consumption – 28W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 700mA
 Control - Switchable

LED

Manufacturer – Lumileds


Ø50

MonoRex™



■ White ■ Black

Light Distribution

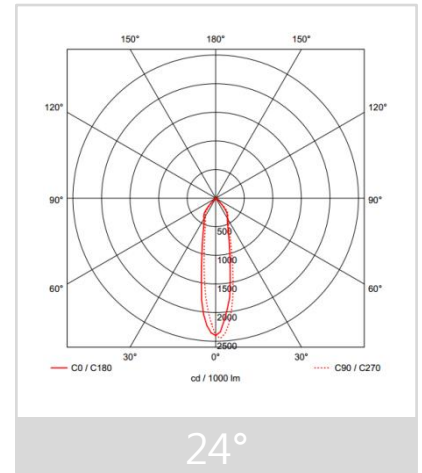

Description

Dimension – Ø57×H67mm
Cut Out – Ø50mm
Power Consumption - 5W
Luminous Flux - 270lm
Luminous Efficacy - 54lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra 80
Life Time - 35,000hrs
Control - Switchable

LED

Manufacturer - Philips
Package Series – COB 1201

SMPS

SMPS Type - External
Power Consumption - 5W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 36V / 120mA
Control - Switchable

Ø60

MonoRex™



■ White ■ Black


■ Description

Dimension – Ø70×H79mm
Cut Out – Ø60mm
Power Consumption - 7W
Luminous Flux - 355lm
Luminous Efficacy - 50lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 15° / 24° / 36°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra 80
Life Time - 35,000hrs
Control - Switchable

■ LED

Manufacturer - Philips
Package Series – COB 1201

■ Light Distribution

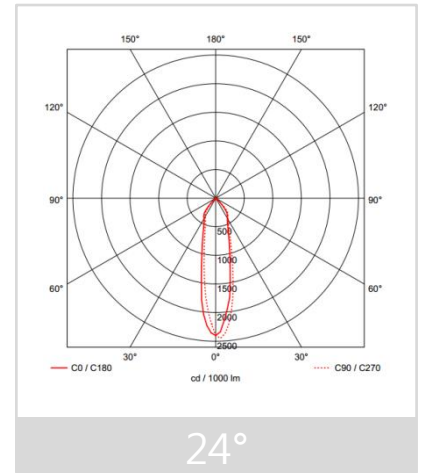


■ SMPS

SMPS Type - External
Power Consumption - 7W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 36V / 180mA
Control - Switchable

MonoRex™ Series Track Light Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

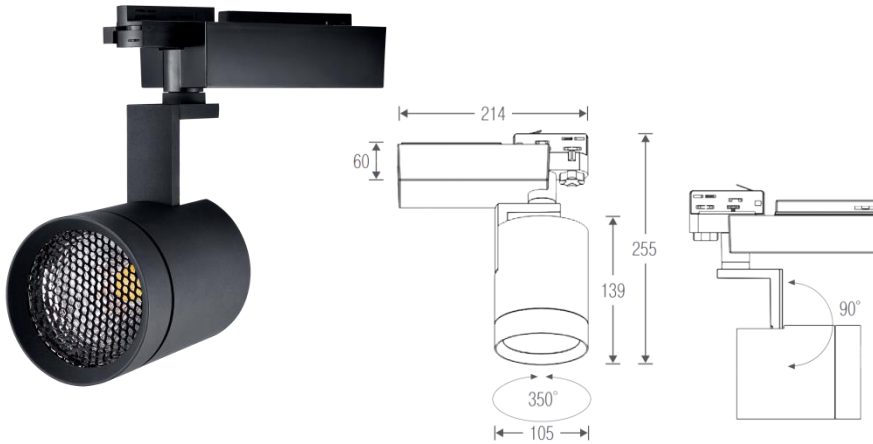

■ White ■ Black

Light Distribution

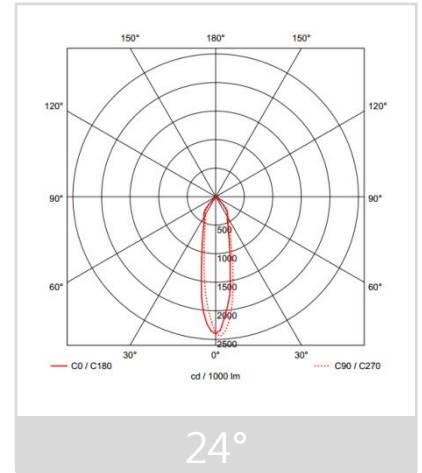

Description




Dimension - Ø105×H254mm / 원통길이(H139mm)
 Power Consumption - 40W
 Luminous Flux - 2,720lm
 Luminous Efficacy - 68lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 40°
 Color Temperature - ■ 3000K ■ 6000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

SMPS


Manufacturer - 해외인증품
 SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - DC 25-42V / 1050mA

LED

Manufacturer - Lumileds
 Package Series - 1205



Light Distribution

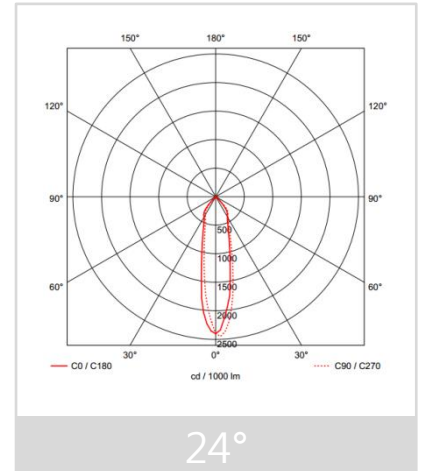

White Black

Description


Dimension - Ø72×H281mm / 원통길이(H229mm)
 Power Consumption - 15W
 Luminous Flux - 1,320lm
 Luminous Efficacy - 88lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 33°
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - Internal
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - DC 35V / 350mA


LED

Manufacturer - Lumileds
 Package Series - 1202S

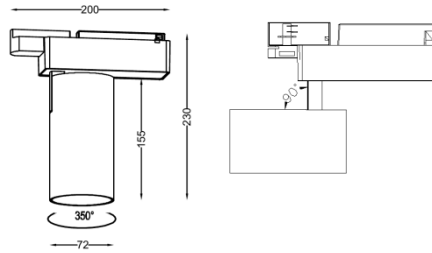

■ White ■ Black

Light Distribution

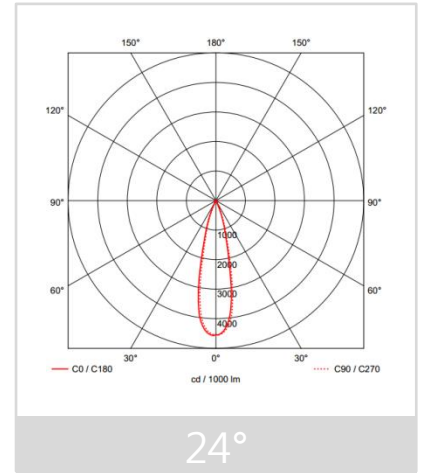

Description


Dimension - Ø72×H230mm / 원통길이(H155mm)
 Power Consumption - 30W
 Luminous Flux - 2,160lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - DC 23-42V / 700mA


LED

Manufacturer - Lumileds
 Package Series - 1205

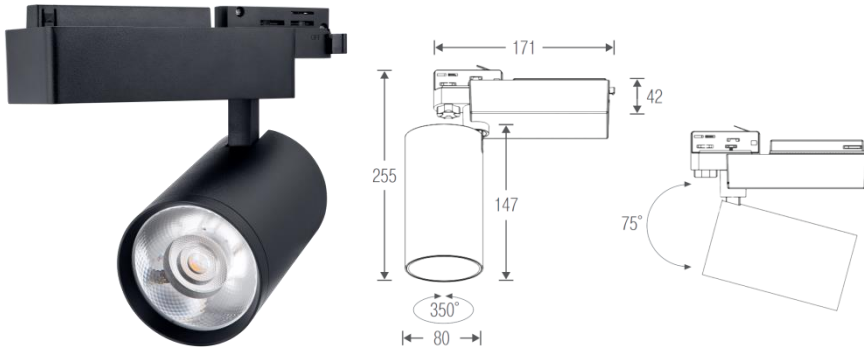

■ White ■ Black

Light Distribution

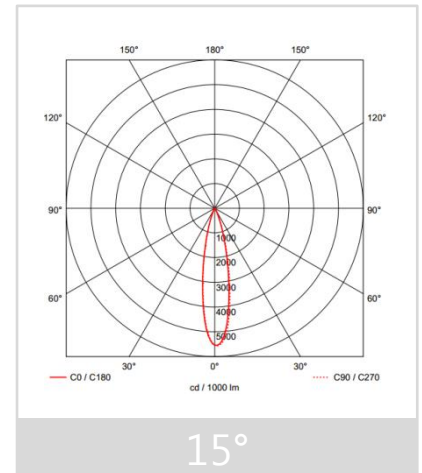

Description

Dimension - Ø80×D171×H255mm / 원통길이(H147mm)
 Power Consumption - 40W
 Luminous Flux - 3,440lm
 Luminous Efficacy - 86lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 36°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - DC 25-42V / 1050mA

LED

Manufacturer - Lumileds
 Package Series - 1205



■ White


■ Description

Dimension – Ø58 x H185mm / 원통길이(H120mm)
 Power Consumption - 15W
 Luminous Flux – 1,320lm
 Luminous Efficacy - 88lm/W
 Input Voltage - AC 220V / 50-60Hz
 Operating Voltage - DC 34.7V / 500mA
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 40°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

■ LED


Manufacturer - Citizen
 Package Series - CLU028-1204C4

■ Light Distribution

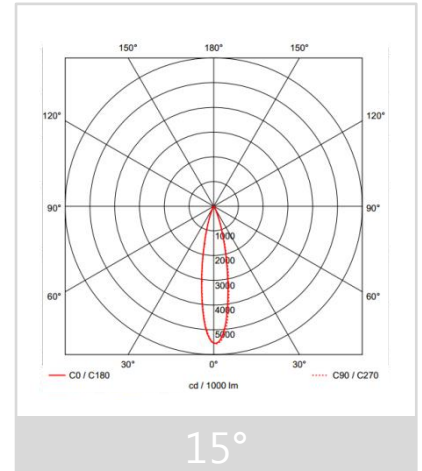


■ SMPS

SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 34.7V / 500mA

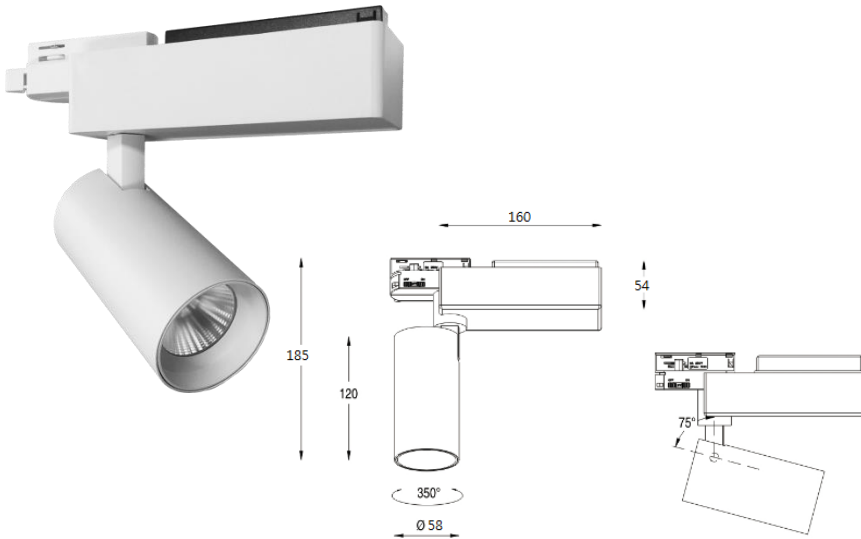

■ White ■ Black

Light Distribution

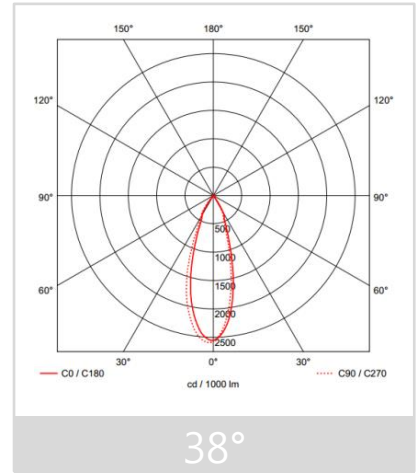

Description


Dimension - Ø58×H175mm / 원통길이(H120mm)
 Power Consumption - 20W
 Luminous Flux - 1,760lm
 Luminous Efficacy - 88lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K ■ 6000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS

Manufacturer - 해외인증품
 SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - DC 25-42V / 500mA


LED

Manufacturer - Lumileds
 Package Series - 1204

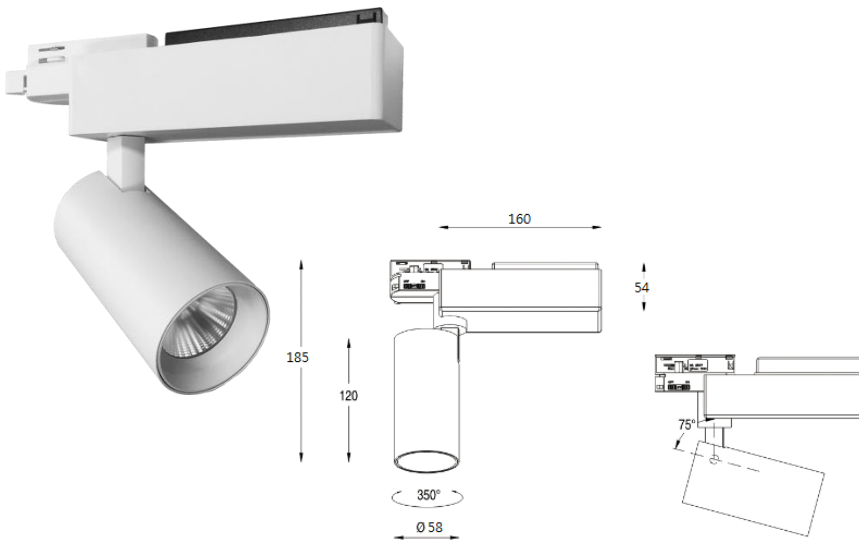

■ White ■ Black

Light Distribution

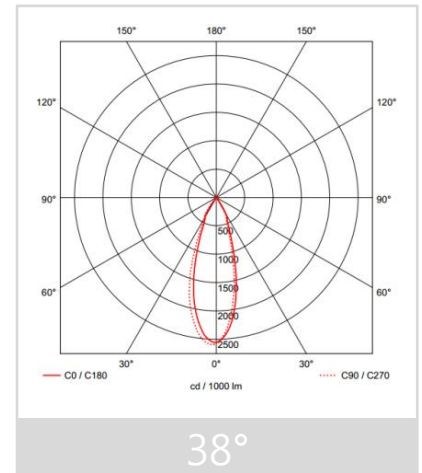

Description

Dimension - Ø58×H175mm / 원통길이(H120mm)
 Power Consumption - 12W
 Luminous Flux - 1,056lm
 Luminous Efficacy - 88lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■3000K ■4000K ■5000K ■6000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS

Manufacturer - 해외인증품
 SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - DC 21-42V / 300mA

LED

Manufacturer - Lumileds
 Package Series - 1202S



■ White


■ Description

Dimension – Ø95xH255mm
 Power Consumption - 40W
 Luminous Flux – 3,080lm
 Luminous Efficacy - 77lm/W
 Input Voltage - AC 220V / 50-60Hz
 Operating Voltage - DC 34.7V / 800mA
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 10°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

■ LED


Manufacturer - Osram
 Package Series - GW KAFJB5.EM

■ Light Distribution

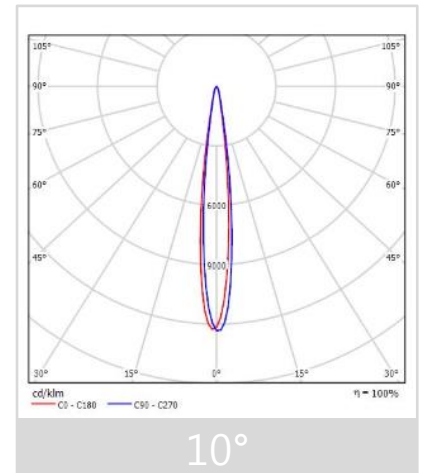


■ SMPS

SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 34.7V / 800mA

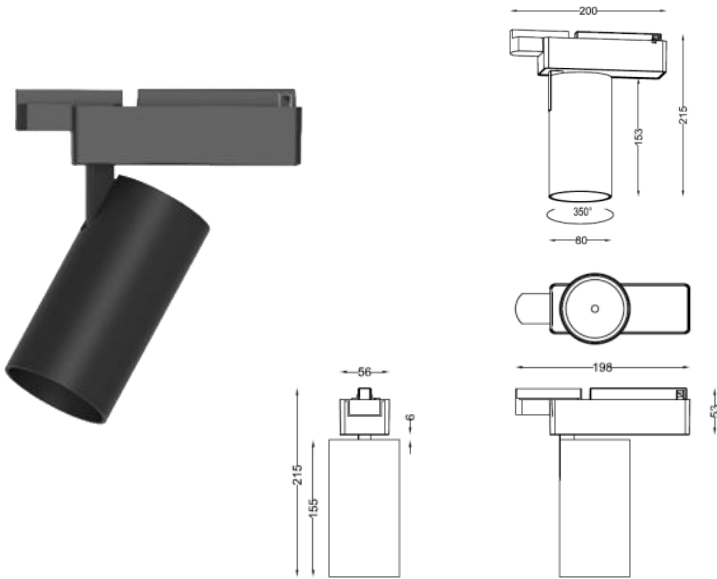

■ White ■ Black

Light Distribution

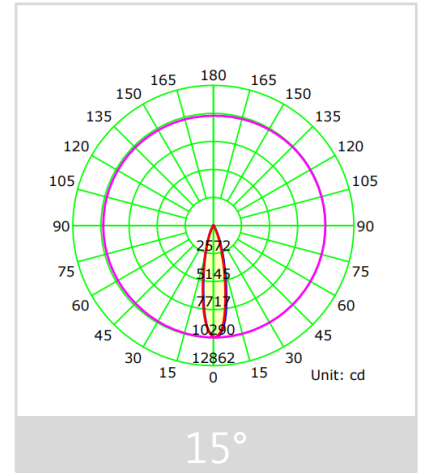

Description


Dimension – Ø80×H215mm / 원통길이(H155mm)
 Power Consumption - 40W
 Luminous Flux – 2,870lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 40° / 60°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS

SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - 1050mA 34V


LED

Manufacturer - Citizen
 Package Series - CLU038-1210C4

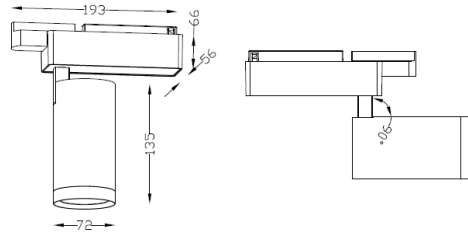

■ White ■ Black

Light Distribution

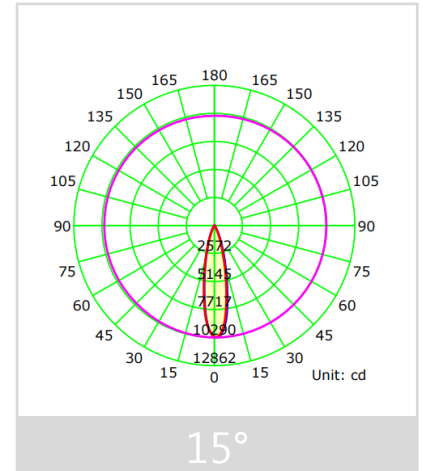

Description


Dimension – Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux – 2,400lm
 Luminous Efficacy - 75lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■2700K (Light Pink)
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS

SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - 1050mA DC 25-42V


LED

Manufacturer - Citizen
 Package Series - CLU034-1208B8-LPGV1F7
 Meat

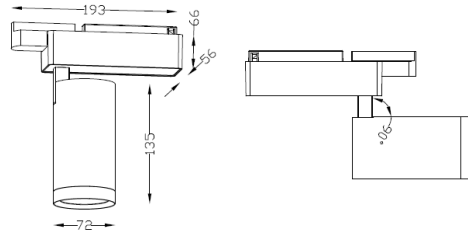

■ White ■ Black

Light Distribution

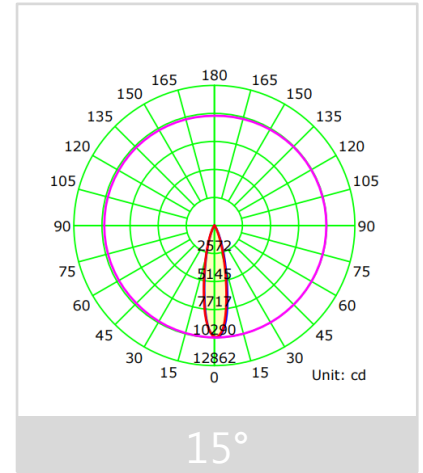

Description


Dimension – Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux – 2,400lm
 Luminous Efficacy - 75lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■2700K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS

SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - 1050mA DC 25-42V


LED

Manufacturer - Citizen
 Package Series - CLU038-1208C4-27BV1N3
 Wine, Deli

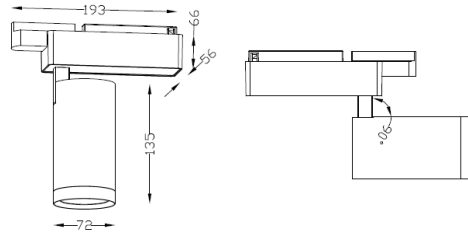

■ White ■ Black

Light Distribution

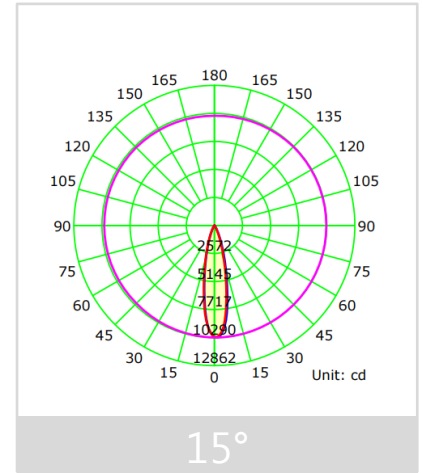

Description


Dimension - Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux - 2,496lm
 Luminous Efficacy - 78lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS

SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - 1050mA DC 25-42V


LED

Manufacturer - Citizen
 Package Series - CLU038-1208C4-30BV1N3
 Common, Agricultural

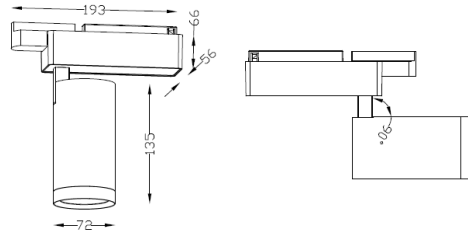

White Black

Light Distribution

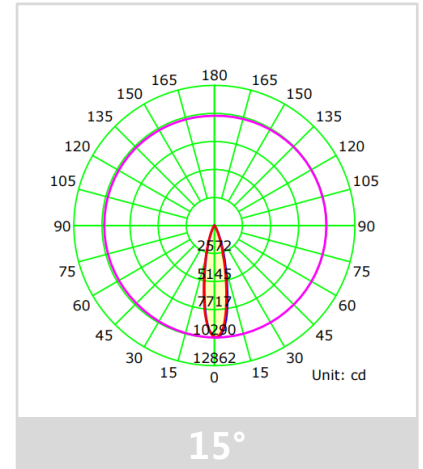

Description


Dimension - Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux - 2,624lm
 Luminous Efficacy - 82lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 4000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS

SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - 1050mA DC 25-42V


LED

Manufacturer - Citizen
 Package Series - CLU038-1208C4-40BV1N3
 Clothing

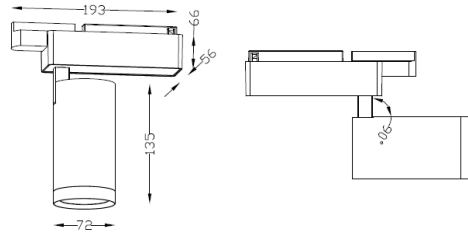

■ White ■ Black

Light Distribution

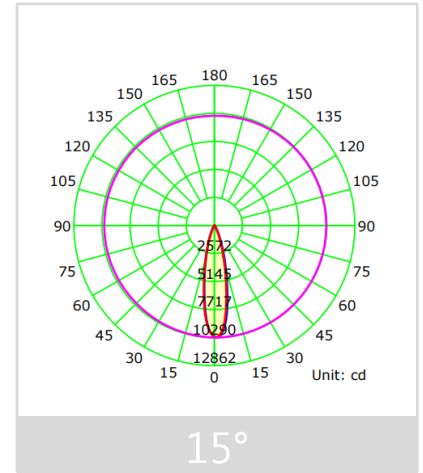

Description

Dimension - Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux - 3,072lm
 Luminous Efficacy - 96lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 5000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS

SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - 1050mA DC 25-42V


LED

Manufacturer - Citizen
 Package Series - CLU038-1208C4-50BV1N3
 Fish

실린더 32W 비비드 브릴리언트 2P 2700K

MonoRex™

Light Distribution

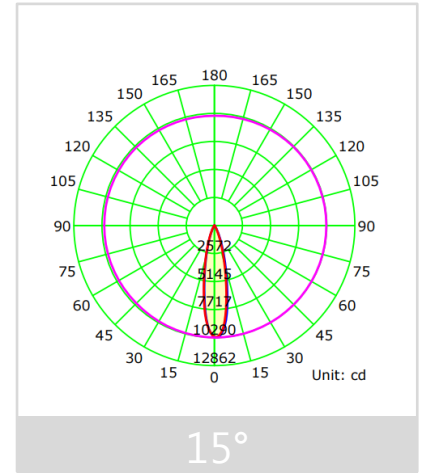

White Black

Description


Dimension - Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux - 2066.8lm
 Luminous Efficacy - 66lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 2700K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

LED



Manufacturer - Citizen
 Package Series - CLU038-1208C4

Vivid Series Brilliant Type

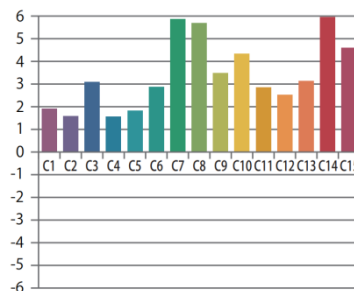

ΔC*ab Ave (Ref.) 3.2




Standard light (5,000K, 80 CRI Min.)



Vivid Series Natural Type (5,000K)


실린더 32W 비비드 브릴리언트 2P 3000K

MonoRex™

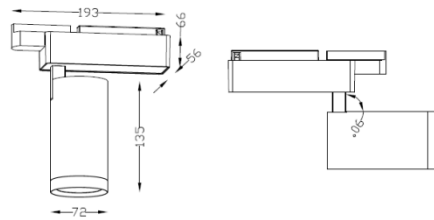

■ White ■ Black

Light Distribution

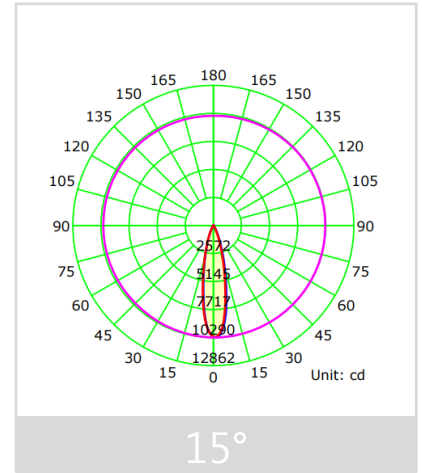

Description


Dimension - Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux - 2274lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

■ LED



Manufacturer - Citizen
 Package Series - CLU038-1208C4

Vivid Series Brilliant Type

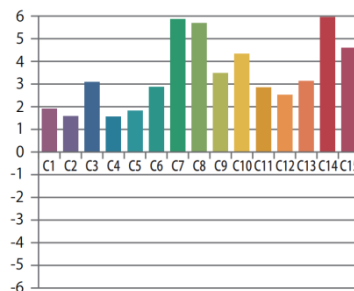

ΔC*ab Ave (Ref.) 3.2




Standard light (5,000K, 80 CRI Min.)



Vivid Series Natural Type (5,000K)


실린더 32W 비비드 브릴리언트 2P 4000K

MonoRex™

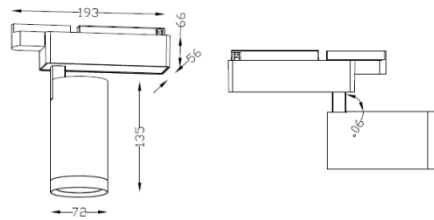

■ White ■ Black

Light Distribution

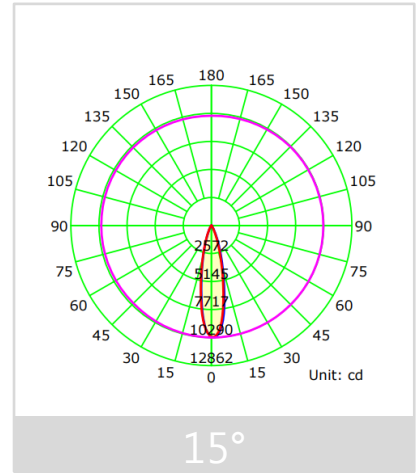

Description


Dimension - Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux - 2414lm
 Luminous Efficacy - 75lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 4000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

■ LED



Manufacturer - Citizen
 Package Series - CLU038-1208C4

Vivid Series Brilliant Type

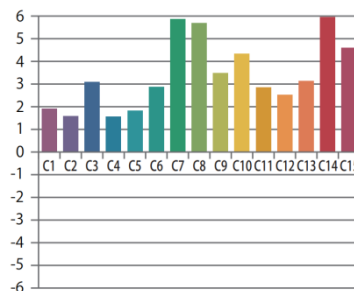

ΔC*ab Ave (Ref.) 3.2



Standard light (5,000K, 80 CRI Min.)




Vivid Series Natural Type (5,000K)

실린더 32W 비비드 브릴리언트 2P 5000K

MonoRex™

Light Distribution

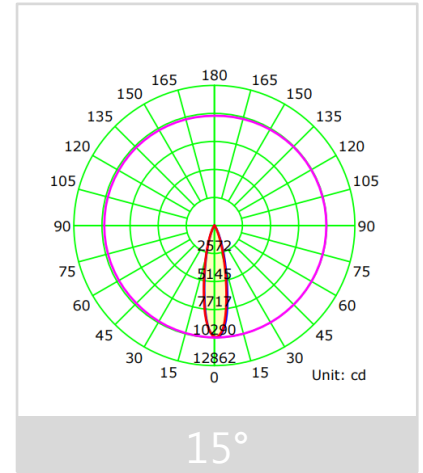

White Black

Description


Dimension - Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux - 2666lm
 Luminous Efficacy - 84lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - 5000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

LED



Manufacturer - Citizen
 Package Series - CLU038-1208C4

Vivid Series Brilliant Type

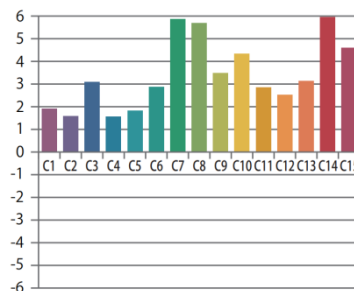


ΔC*ab Ave (Ref.) 3.2



Standard light (5,000K, 80 CRI Min.)




Vivid Series Natural Type (5,000K)

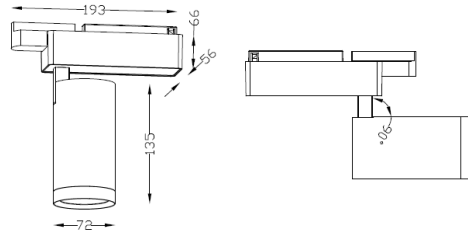

■ White ■ Black

Light Distribution

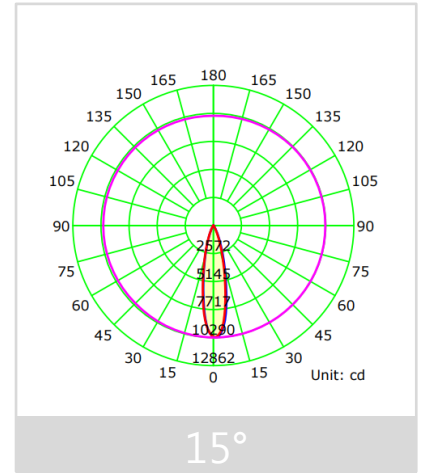

Description

Dimension - Ø72×H201mm / 원통길이(H135mm)
 Power Consumption - 32W
 Luminous Flux - 2,274lm
 Luminous Efficacy - 72lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS


SMPS Type - External
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - 1050mA DC 25-42V

LED


Manufacturer - Citizen
 Package Series - CLU038-1204C4-30NV1N2
 Common, Agriculutral



■ White ■ Black

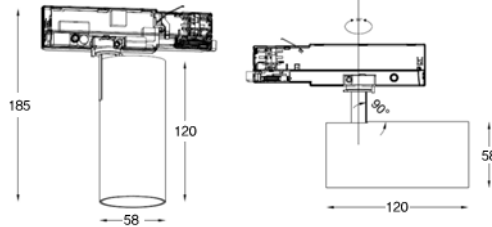

Light Distribution

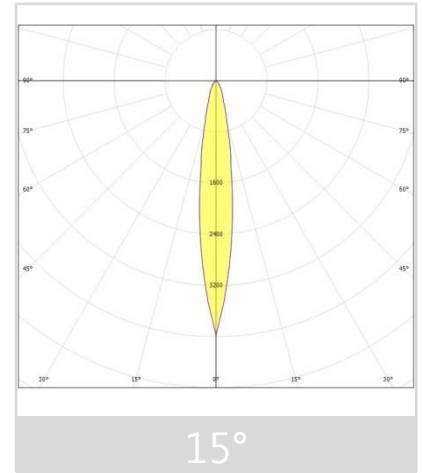

Description


Dimension - Ø58×H185mm / 원통길이(H120mm)
 Power Consumption - 22W
 System Output - 1,936lm
 Luminous Efficacy - 88lm/W
 Input Voltage - AC 220V / 50-60Hz
 Operating Voltage - DC 36V / 550mA
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 33° / 50° (Reflector, Guider)
 - 16° / 24° / 38° (Lens)
 Accessories - Lens / Guider
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS


SMPS Type - Integrated type (4P)
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 550mA

LED

Manufacturer - Lumileds

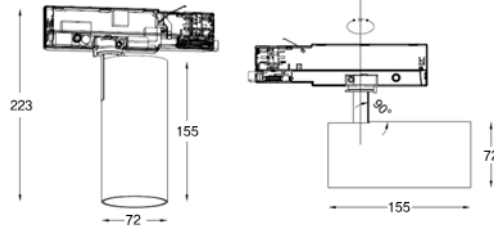

Light Distribution

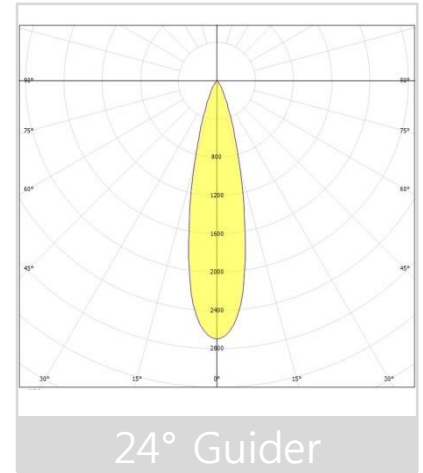

White Black

Description


Dimension – Ø72×H223mm / 원통길이(H155mm)
 Power Consumption - 22W
 System Output – 1,980lm
 Luminous Efficacy – 90lm/W
 Input Voltage - AC 220V / 50-60Hz
 Operating Voltage - DC 36V / 550mA
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 33° / 50° (Reflector, Guider)
 - 15° / 24° / 36° / 60° (Lens)
 Accessories – Lens / Guider
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS


SMPS Type – Integrated type (4P)
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 550mA

LED

Manufacturer - Lumileds

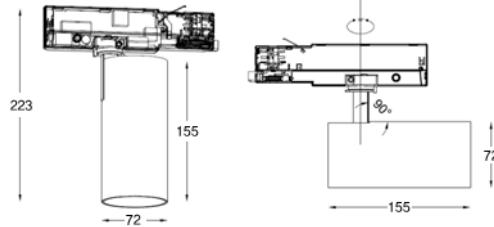

Light Distribution

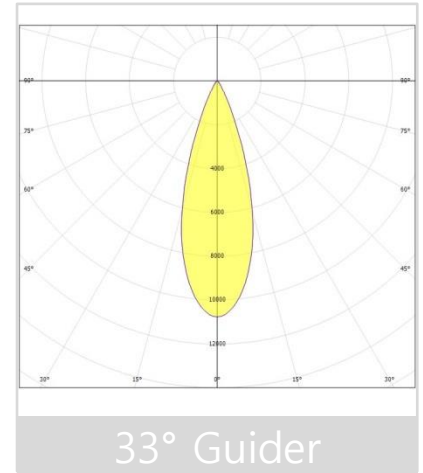

White Black

Description


Dimension – Ø72×H223mm / 원통길이(H155mm)
 Power Consumption - 32W
 System Output – 2,944lm
 Luminous Efficacy - 92lm/W
 Input Voltage - AC 220V / 50-60Hz
 Operating Voltage - DC 36V / 750mA
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 33° / 50° (Reflector, Guider)
 - 15° / 24° / 36° / 60° (Lens)
 Accessories – Lens / Guider
 Color Temperature - 3000K 4000K 5000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS


SMPS Type – Integrated type (4P)
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 750mA

LED

Manufacturer - Lumileds

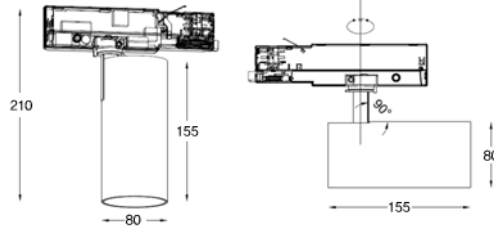

Light Distribution

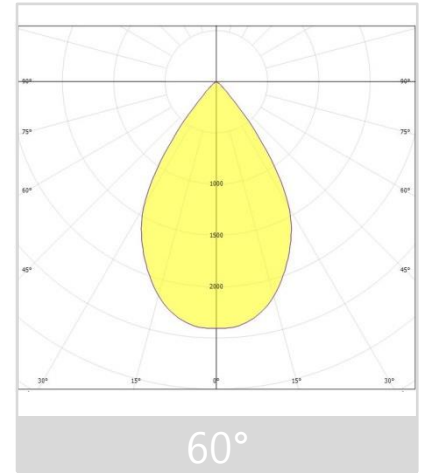

■ White ■ Black

Description


Dimension – Ø80×H210mm / 원통길이(H155mm)
 Power Consumption - 36W
 System Output – 3,024lm
 Luminous Efficacy - 84lm/W
 Input Voltage - AC 220V / 50-60Hz
 Operating Voltage - DC 36V / 900mA
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 33° / 45° / 60° (Reflector, Guider)
 - 15° / 24° / 36° / 60° (Lens)
 Accessories – Lens / Guider
 Color Temperature - ■3000K ■4000K ■5000K
 CRI - Ra >90
 Life Time - 50,000hrs
 Control - Switchable

SMPS

SMPS Type – Integrated type (4P)
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 900mA

LED

Manufacturer - Lumileds

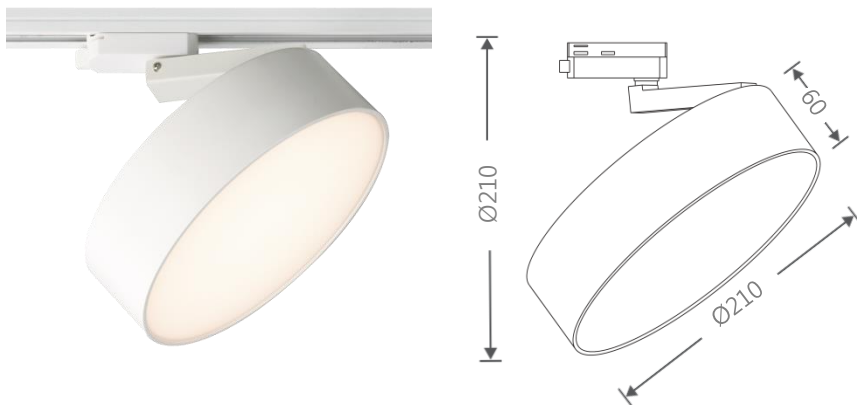

■ White

■ Description

Dimension – Ø210xD60xH210mm

Power Consumption – 15W

Luminous Flux – 1,500lm

Luminous Efficacy – 100lm/W

Material - Body: Aluminum

Color Temperature - ■ 3000K ■ 4000K ■ 5700K


Adaptor - 2P / 4P

Control - Switchable

■ LED


Manufacturer - Osram

Package Series – SMD DURIS E 2835 LED

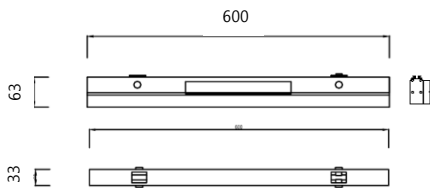

White Black

Light Distribution

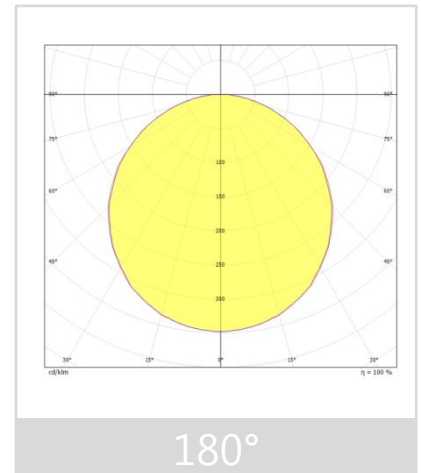

Description


Dimension - W600xD33xH63mm
 Power Consumption - 20W
 Luminous Flux - 2,500lm
 Luminous Efficacy - 125lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 180°
 Color Temperature - 3000K 4000K 6500K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control - Switchable

SMPS

SMPS Type - Internal
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 210V / 100mA
 Control - Switchable


LED

Manufacturer - Seoul Semiconductor

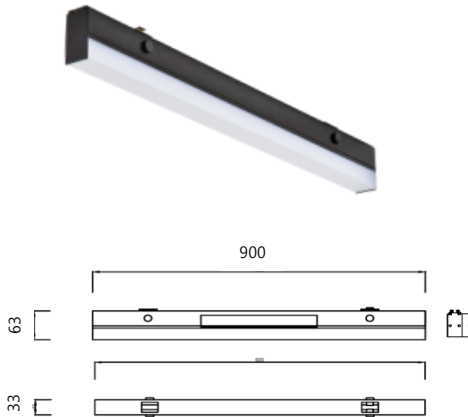

White
 Black

Light Distribution

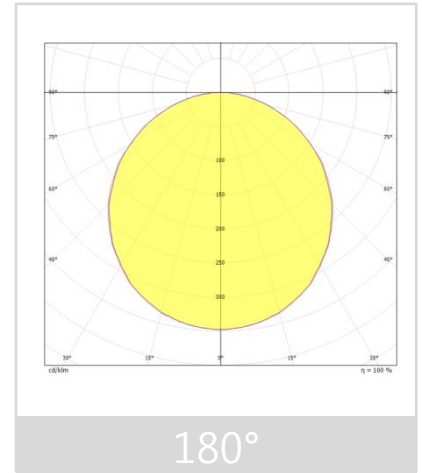

Description


Dimension - W900×D33×H63mm
 Power Consumption - 30W
 Luminous Flux – 3,750lm
 Luminous Efficacy – 125lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 180°
 Color Temperature - ■ 3000K ■ 4000K ■ 6500K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable

SMPS

SMPS Type - Internal
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 210V / 160mA
 Control – Switchable


LED

Manufacturer – Seoul Semiconductor

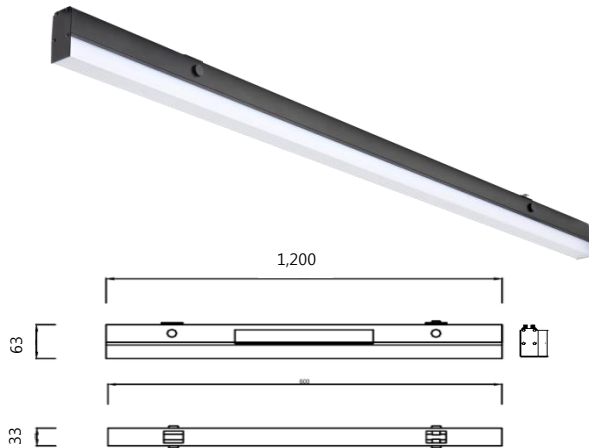

White Black

Light Distribution

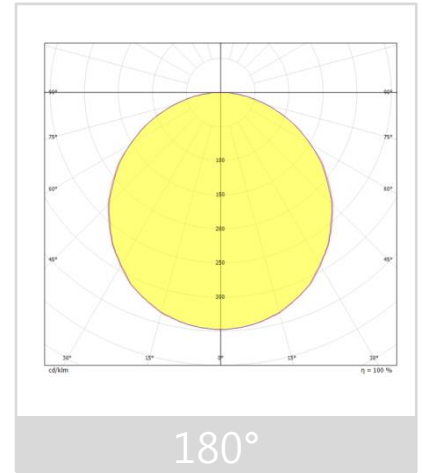

Description


Dimension – W1,200×D33×H63mm
 Power Consumption - 40W
 Luminous Flux – 5,000lm
 Luminous Efficacy – 125lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 180°
 Color Temperature - 3000K 4000K 6500K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable

SMPS

SMPS Type - Internal
 Power Consumption - 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 210V / 210mA
 Control – Switchable

LED

Manufacturer – Seoul Semiconductor

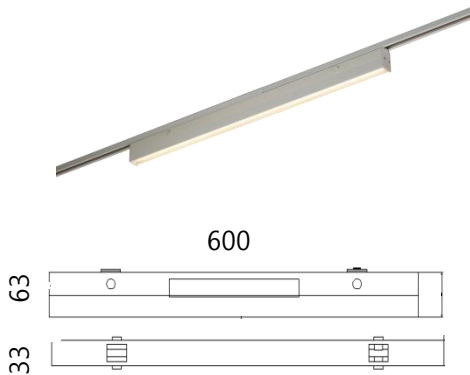

White Black


Description

Dimension - W600xD33xH63mm
 Power Consumption - 20W
 Luminous Flux – 2,500lm
 Luminous Efficacy – 125lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 120°
 Color Temperature - 3000K 4000K 6500K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable

LED


Manufacturer – Seoul Semiconductor

Light Distribution

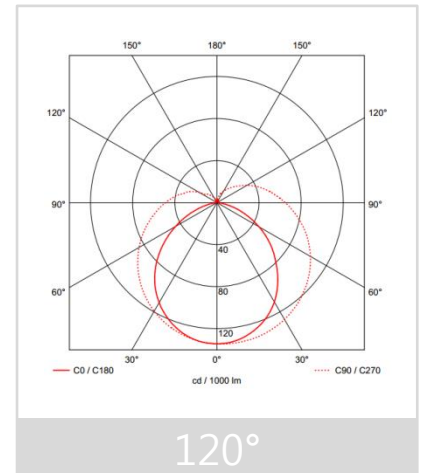

SMPS

SMPS Type - Internal
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 210V / 100mA
 Control – Switchable

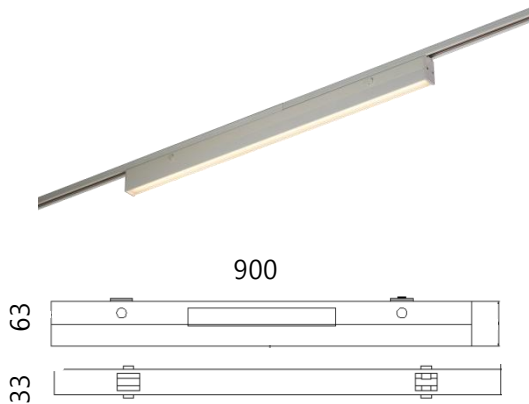

White Black


Description

Dimension - W900×D33xH63mm
 Power Consumption - 30W
 Luminous Flux – 3,750lm
 Luminous Efficacy – 125lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 120°
 Color Temperature - 3000K 4000K 6500K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable

LED


Manufacturer – Seoul Semiconductor

Light Distribution

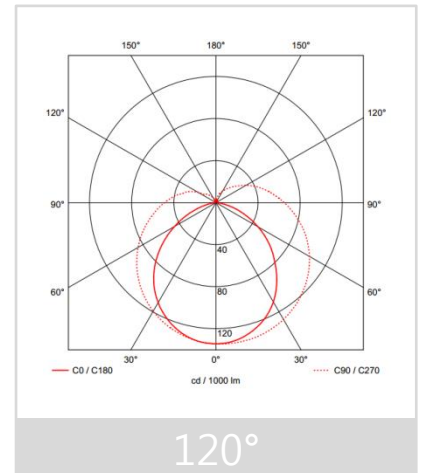

SMPS

SMPS Type - Internal
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 210V / 160mA
 Control – Switchable

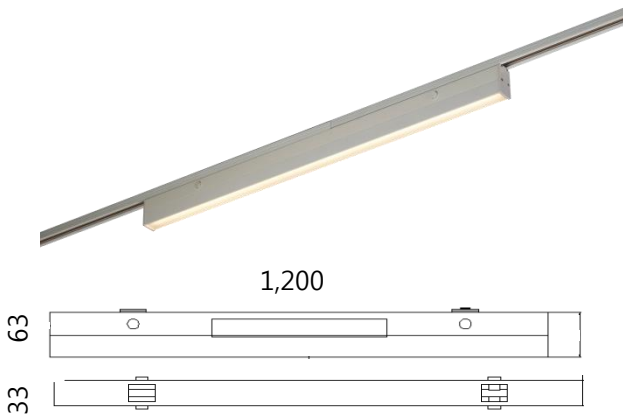

White Black


Description

Dimension – W1,200×D33×H63mm
 Power Consumption - 40W
 Luminous Flux – 5,000lm
 Luminous Efficacy – 125lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 120°
 Color Temperature - 3000K 4000K 6500K
 CRI - Ra >90
 Life Time - 35,000hrs
 Control – Switchable

LED

Manufacturer – Seoul Semiconductor



Light Distribution

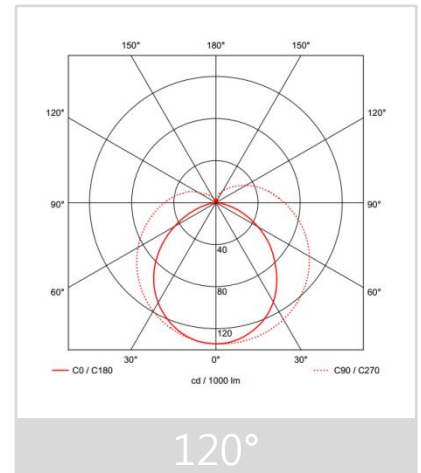

SMPS

SMPS Type - Internal
 Power Consumption - 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 210V / 210mA
 Control – Switchable

LN-1000-20W

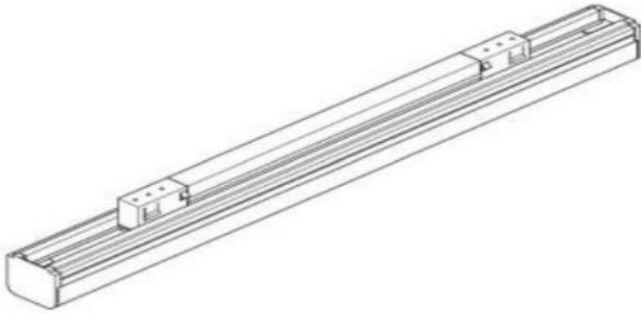

■ White ■ Black

Description

Dimension - L1,200xW34xH45mm
Power Consumption - 20W
Luminous Flux - 2,000lm
Luminous Efficacy - 100lm/W
Material - Trim & Heat sink : AL, Cover: PC
Color Temperature - ■ 4000K
CRI - Ra 80
Life Time - 30,000hrs
Control - Switchable


LED

Manufacturer - Seoul Semiconductor
Package Series - SMD 2835

SMPS

SMPS Type - Internal
PF - 0.90
Input Voltage - AC 220~240V / 60Hz

LN-1200-30W

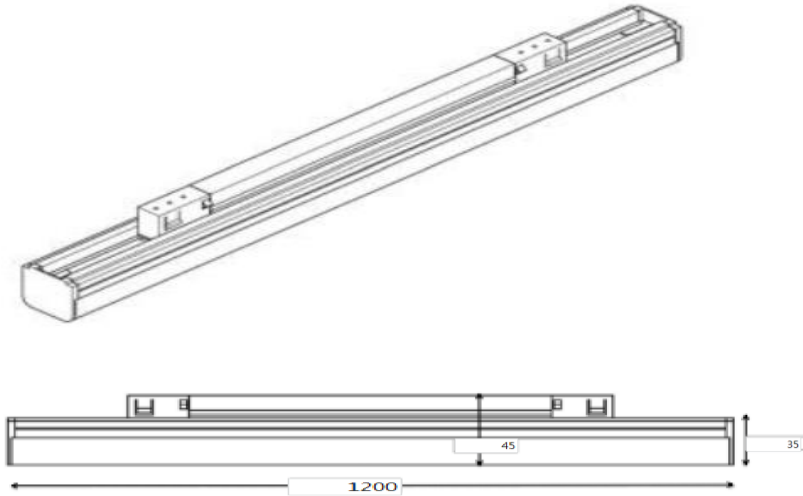

■ White ■ Black

Description


Dimension - L1,200xW34xH45mm
Power Consumption - 30W
Luminous Flux - 3,000lm
Luminous Efficacy - 100lm/W
Material - Trim & Heat sink : AL, Cover: PC
Color Temperature - 4000K
CRI - Ra 80
Life Time - 30,000hrs
Control - Switchable

LED

Manufacturer - Seoul Semiconductor
Package Series - SMD 2835

SMPS

SMPS Type - Internal
PF - 0.90
Input Voltage - AC 220~240V / 60Hz



■ White ■ Black


Description

Dimension – Ø62 x H85mm / 원통길이: 150mm
 Power Consumption – 24W
 Luminous Flux – 1,800lm
 Luminous Efficacy – 75lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Life Time - 35,000hrs
 Control - Switchable

LED

Manufacturer – CREE


Light Distribution

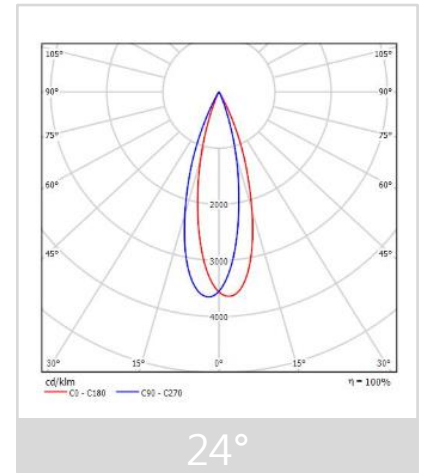


SMPS

SMPS Type – Integrated type
 Power Consumption – 24W
 Input Voltage - AC 220-240V / 50-60Hz
 Control - Switchable

Accessory




[Honeycomb Louver]

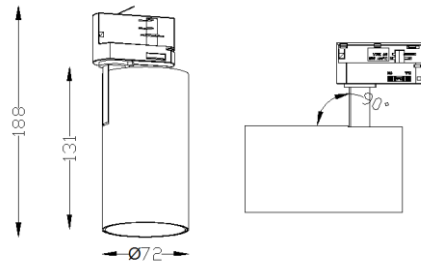

■ White ■ Black

Light Distribution

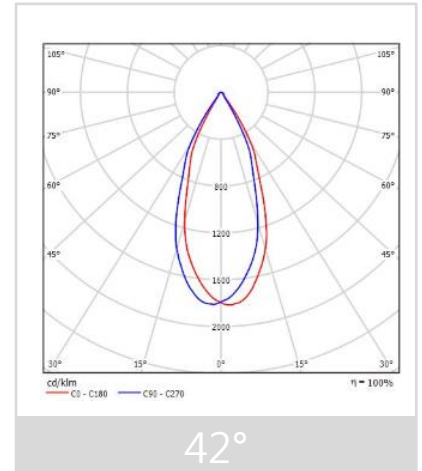

Description

Dimension – Ø72×H188mm / 원통길이(H131mm)
 Power Consumption - 20W
 Luminous Flux – 1,569lm
 Luminous Efficacy – 72lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 33° / 42°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Life Time - 50,000hrs
 Control - Switchable

SMPS



Manufacturer - 해외인증품
 SMPS Type - Internal
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - DC 20-43V / 500mA

LED

Manufacturer - Lumileds
 Package Series – COB L04

MonoRex™ Series Zoomable Track Light Specifications





■ White ■ Black

Description


Dimension – Ø70mm / 원통길이 : 101~129mm
 Power Consumption - 10W
 Luminous Flux – 850lm
 Luminous Efficacy - 85lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 18°~60° (18° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type – External
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage – DC 30-42V

LED

Manufacturer – CITIZEN
 Package Series -1203

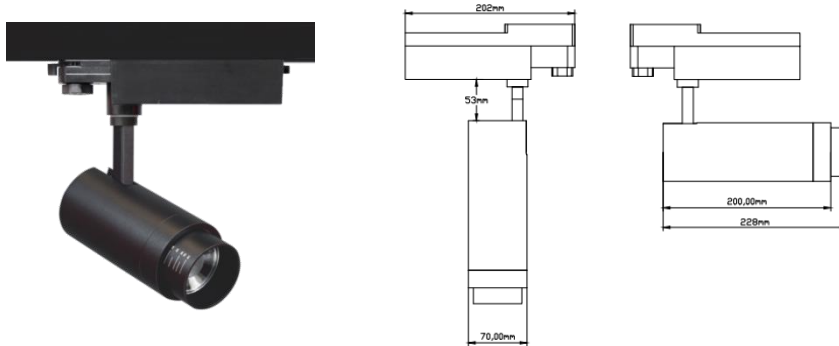

■ White ■ Black

Description


Dimension – Ø70mm / 원통길이 : 200~228mm
 Power Consumption - 20W
 Luminous Flux – 1,700lm
 Luminous Efficacy - 85lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 18°~60° (18° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type – External
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage – DC 30-42V

LED

Manufacturer – CITIZEN
 Package Series -1203

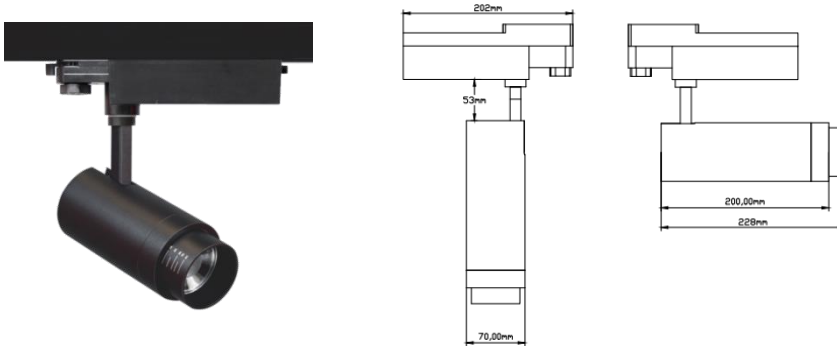

■ White ■ Black

Description

Dimension – Ø70mm / 원통길이 : 200~228mm
 Power Consumption - 30W
 Luminous Flux – 2,550lm
 Luminous Efficacy - 85lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 18°~60° (18° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra 90
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type – External
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage – DC 30-42V

LED

Manufacturer – CITIZEN
 Package Series -1203



■ White ■ Black

Description



Dimension – Ø92×H265mm / 원통길이 : 172~200mm
 Power Consumption - 10W
 Luminous Flux – 850lm
 Luminous Efficacy - 85lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 16°~60° (16° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - >Ra 80
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - Internal
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - 250mA

LED

Manufacturer – CREE
 Package Series -1507



■ White ■ Black

Description


Dimension – Ø92×H265mm / 원통길이 : 172~200mm
 Power Consumption - 20W
 Luminous Flux – 1,700lm
 Luminous Efficacy - 85lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 16°~60° (16° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - >Ra 80
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - Internal
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - 500mA

LED

Manufacturer – CREE
 Package Series -1512

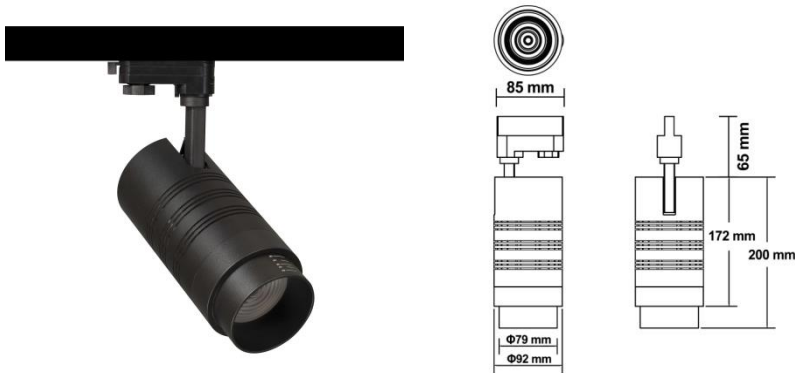

■ White ■ Black

Description


Dimension – Ø92×H265mm / 원통길이 : 172~200mm
 Power Consumption - 10W
 Luminous Flux – 850lm
 Luminous Efficacy – 85lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 16°~60° (16° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - >Ra 80
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - Internal
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - 250mA

LED

Manufacturer – CREE
 Package Series -1507

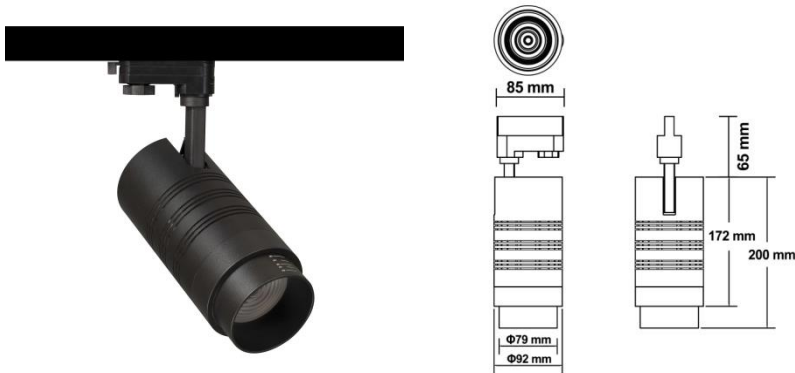

■ White ■ Black

Description

Dimension – Ø92×H265mm / 원통길이 : 172~200mm
 Power Consumption - 20W
 Luminous Flux – 1,700lm
 Luminous Efficacy - 85lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 16°~60° (16° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - >Ra 80
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - Internal
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - 500mA

LED

Manufacturer – CREE
 Package Series -1512



■ White ■ Black

Description


Dimension – Ø92×H265mm / 원통길이 : 172~200mm
 Power Consumption - 30W
 Luminous Flux – 2,550lm
 Luminous Efficacy – 85lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 16°~60° (16° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - >Ra 80
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - Internal
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - 750mA

LED

Manufacturer – CREE
 Package Series -1816

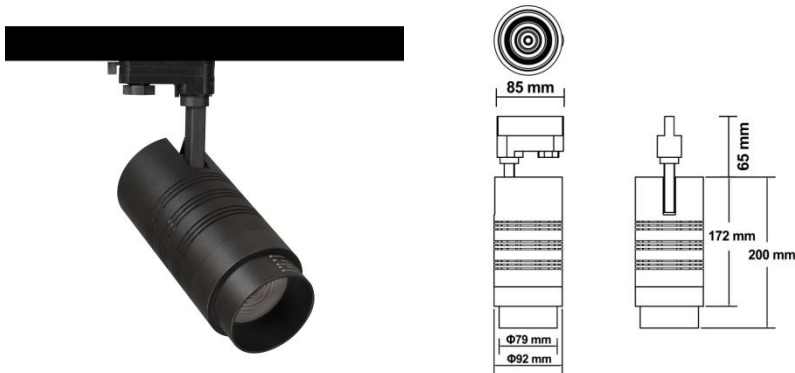

■ White ■ Black

Description

Dimension – Ø92×H265mm / 원통길이 : 172~200mm
 Power Consumption - 37W
 Luminous Flux – 3,600lm
 Luminous Efficacy - 97lm/W
 Material – Aluminum / Polycarbonate
 Beam Angle - 16°~60° (16° / 24° / 38° / 45° / 60°)
 Color Temperature - ■ 2700K ■ 3000K ■ 4000K ■ 5000K
 CRI - >Ra 80
 Adaptor – 2P / 4P
 Control - Switchable

SMPS

Manufacturer - 해외인증품
 SMPS Type - Internal
 Input Voltage - AC 220-240V / 50-60Hz
 Operating Voltage - 900mA

LED

Manufacturer – CREE
 Package Series -2520

MonoRex

MonoRex™ Series VarioRex™ Track Light Specifications



CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747


Recessed Track Rail

MonoRex™



■ Sand Black ■ Sand White

Light Distribution



Description

CGTS-TR-1M

Dimension - W1,005×D81.5×H87.5mm

Cut out - W1,010×D50mm

Material - Body: Aluminum

CGTS-TR-1.5M

Dimension - W1,505×D81.5×H87.5mm

Cut out - W1,510×D50mm

Material - Body: Aluminum

CGTS-TR-2M

Dimension - W2,005×D81.5×H87.5mm



Cut out - W2,010×D50mm

Material - Body: Aluminum

Surface Mounted Track Rail

MonoRex™

Light Distribution

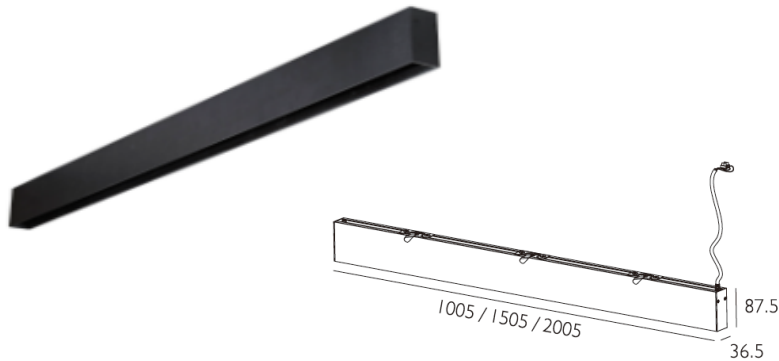

■ Sand Black ■ Sand White

Description

CGTS-TS-1M

Dimension - W1,005×D36.5×H87.5mm

Material - Body: Aluminum

CGTS-TS-1.5M

Dimension - W1,505×D36.5×H87.5mm

Material - Body: Aluminum


CGTS-TS-2M

Dimension - W2,005×D36.5×H87.5mm

Material - Body: Aluminum


Pendant Track Rail

MonoRex™

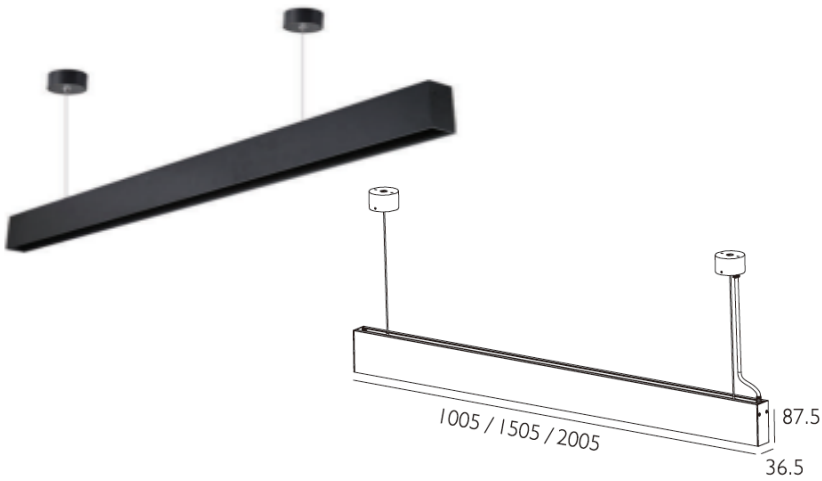

■ Sand Black ■ Sand White

■ Light Distribution



■ Description

CGTS-TS-1M

Dimension - W1,005×D36.5×H87.5mm

Material - Body: Aluminum

CGTS-TS-1.5M



Dimension - W1,505×D36.5×H87.5mm

Material - Body: Aluminum

CGTS-TS-2M


Dimension - W2,005×D36.5×H87.5mm

Material - Body: Aluminum

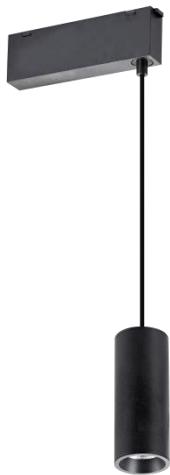

■ Sand Black ■ Sand White

Light Distribution

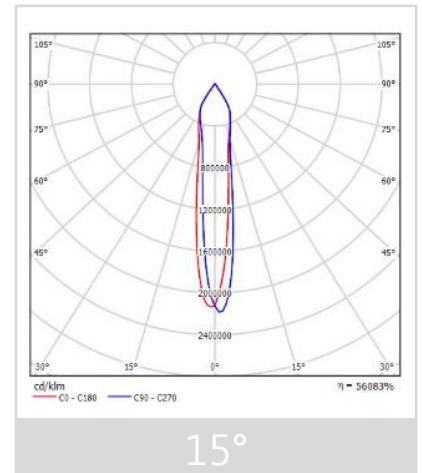

Description

Dimension - Ø60×H(adjustable)mm / 원통길이(H152mm)

Power Consumption - 7W

Luminous Flux - 564lm

Luminous Efficacy - 70lm/W

Input Voltage - DC 24V

Output Voltage - DC 4-22V / 650mA

Material - Body: Aluminum

Beam Angle - 15° / 24° / 35°

Color Temperature - ■ 3000K ■ 4000K ■ 5000K

CRI - Ra >80


Life Time - 50,000hrs

Control - Switchable

LED


Manufacturer - CREE

Package Series - CXA 1304



■ Sand Black ■ Sand White

Light Distribution

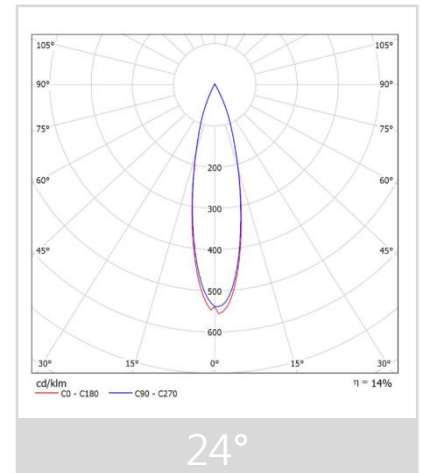


Description

Dimension - Ø45×H134mm / 원통길이(H202mm)
 Power Consumption - 7W×3
 Luminous Flux - 1440lm
 Luminous Efficacy - 69lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 4-22V / 650mA
 Material - Body: Aluminum
 Beam Angle - 15° / 24° / 35°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - CREE
 Package Series - CXA 1304



■ Sand Black ■ Sand White


Description

Dimension – Ø45×H134mm / 원통길이(H74mm)
 Power Consumption - 7W
 Luminous Flux - 480lm
 Luminous Efficacy - 69lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 4-22V / 650mA
 Material - Body: Aluminum
 Beam Angle - 15° / 24° / 35°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED


Manufacturer - CREE
 Package Series – CXA 1304

Light Distribution

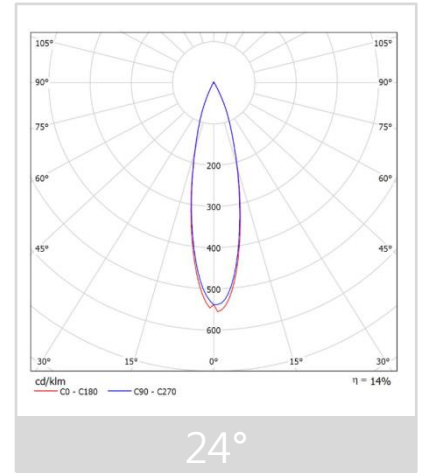


CGTS-TL7576-12W

MonoRex™



■ Sand Black ■ Sand White

Light Distribution

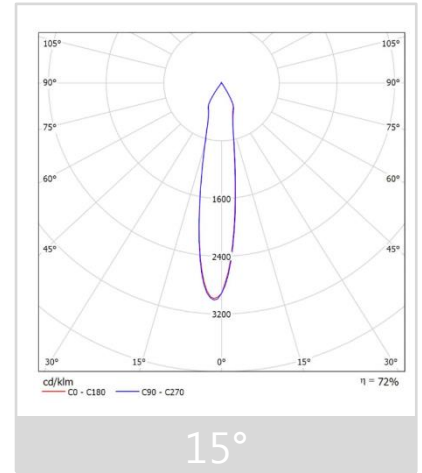


Description

Dimension - Ø61×H150mm / 원통길이(H90mm)
Power Consumption - 12W
Luminous Flux - 902lm
Luminous Efficacy - 75lm/W
Input Voltage - DC 24V
Output Voltage - DC 4-22V / 650mA
Material - Body: Aluminum
Beam Angle - 15° / 24° / 35°
Color Temperature - ■ 3000K ■ 4000K ■ 5000K
CRI - Ra >80
Life Time - 50,000hrs
Control - Switchable


LED

Manufacturer - CREE
Package Series - CXA 1304

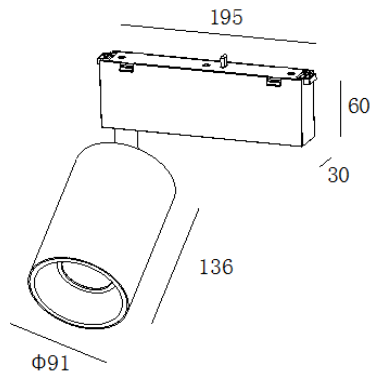

■ Sand Black ■ Sand White

Light Distribution

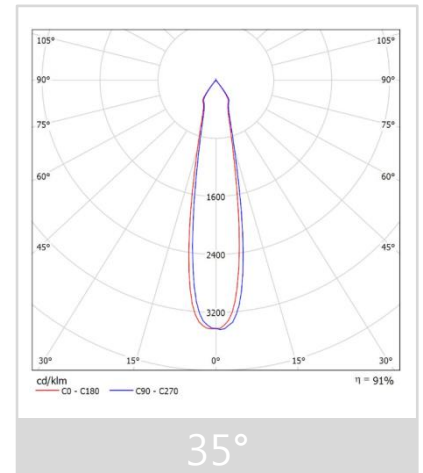

Description

Dimension – Ø91×H196mm / 원통길이(H136mm)
 Power Consumption - 28W
 Luminous Flux – 2,220lm
 Luminous Efficacy - 79lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 24-42V / 700mA
 Material - Body: Aluminum
 Beam Angle - 15° / 24° / 35°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - CREE
 Package Series – CXA 1304



■ Sand Black ■ Sand White


Description


Dimension – W186×D30×H60mm
 Power Consumption - 2W×6
 Luminous Flux - 756lm
 Luminous Efficacy - 63lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 2-22V / 500mA
 Material - Body: Aluminum
 Beam Angle - 8° / 24°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - CREE
 Package Series – XP-E2


Light Distribution

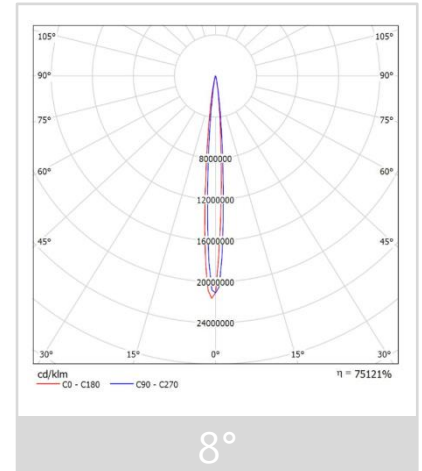

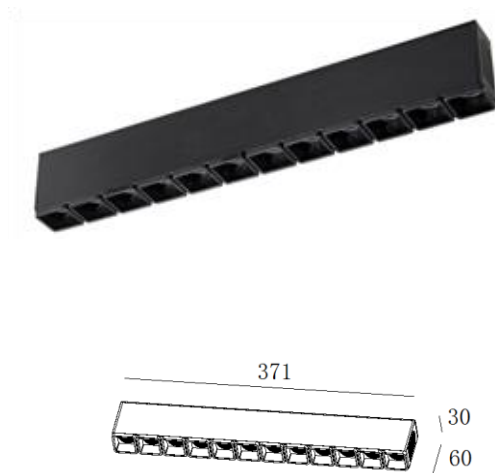

■ Sand Black ■ Sand White

Light Distribution

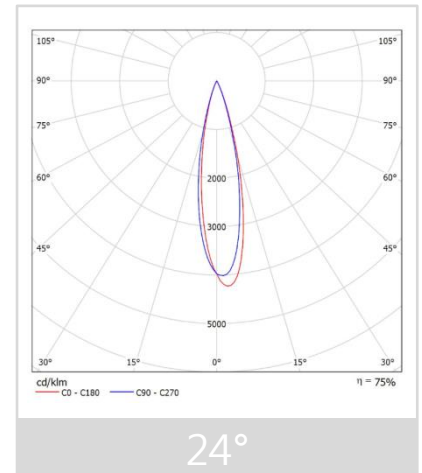


Description

Dimension – W371×D30×H60mm
 Power Consumption - 2W×12
 Luminous Flux – 1,440lm
 Luminous Efficacy - 60lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 24-42V / 450mA
 Material - Body: Aluminum
 Beam Angle - 8° / 24°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - CREE
 Package Series – XP-E2



■ Sand Black ■ Sand White


Description


Dimension – W186×D30×H130mm
 Power Consumption - 2W×6
 Luminous Flux - 756lm
 Luminous Efficacy - 63lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 2-22V / 500mA
 Material - Body: Aluminum
 Beam Angle - 8° / 24°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - CREE
 Package Series – XP-E2


Light Distribution

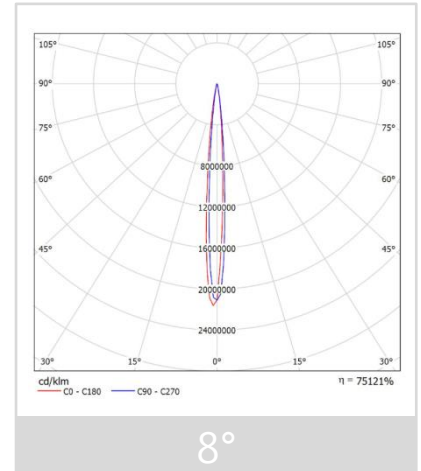



■ Sand Black ■ Sand White

Light Distribution

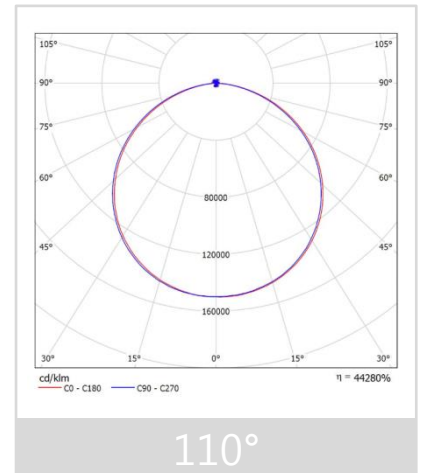


Description

Dimension – W371×D30×H60mm
 Power Consumption - 12W
 Luminous Flux - 443lm
 Luminous Efficacy - 37lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 4-22V / 500mA
 Material - Body: Aluminum
 Beam Angle - 110°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable


LED

Manufacturer - Bridgelux
 Package Series – 2835 0.2W



■ Sand Black ■ Sand White

Light Distribution

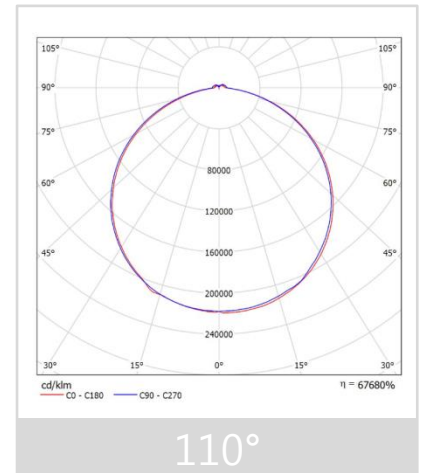


Description

Dimension – W557×D30×H60mm
 Power Consumption - 18W
 Luminous Flux - 680lm
 Luminous Efficacy - 37lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 24-42V / 450mA
 Material - Body: Aluminum
 Beam Angle - 110°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Bridgelux
 Package Series – 2835 0.2W



■ Sand Black ■ Sand White


Description

Dimension – W742×D30×H60mm
 Power Consumption - 24W
 Luminous Flux – 1,050lm
 Luminous Efficacy - 44lm/W
 Input Voltage - DC 24V
 Output Voltage - DC 2-22V / 500mA
 Material - Body: Aluminum
 Beam Angle - 110°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Bridgelux
 Package Series – 2835 0.2W

Light Distribution

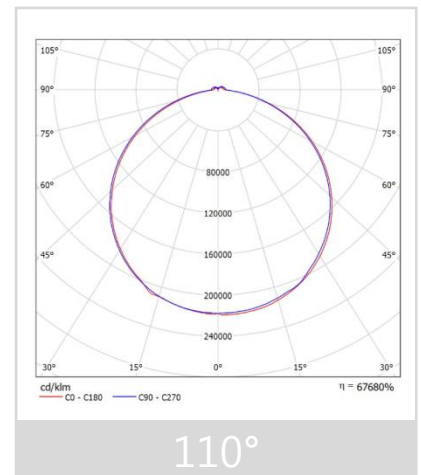


MonoRex™ Series Loco™ Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

LO-EP120C-055IXKWH

MonoRex™

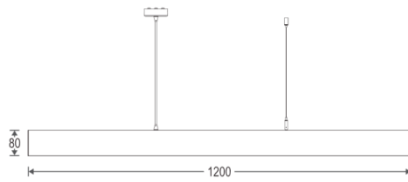


Light Distribution

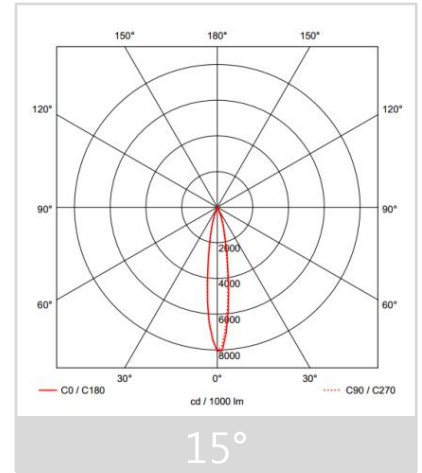


Description

Dimension(mm)	W1,200×D41×H80mm
Power Consumption(W)	55W
Input Voltage(V)	AC 220~240V 50~60Hz
Output Voltage(V)	UP - DC 24V / 1050mA / 33W Down - DC 36V / 500mA / 22W
Material	AL
Beam Angle(°)	15° / 35°
Color Temperature - Control	3000K 4000K 5000K Switchable / 1~10V Dimmable DALI Dimmable
Body Color	Black White Gray



Up Light
24V 1050mA 33W
Down Light
A. 36V 500mA 22W
B. 36V 700mA 28W





Regular
Dark Light




Optional
Black

LO-EP120C-061IXKWH

MonoRex™

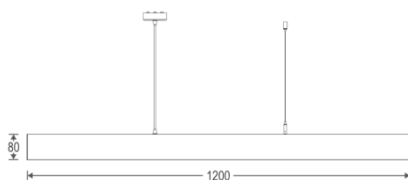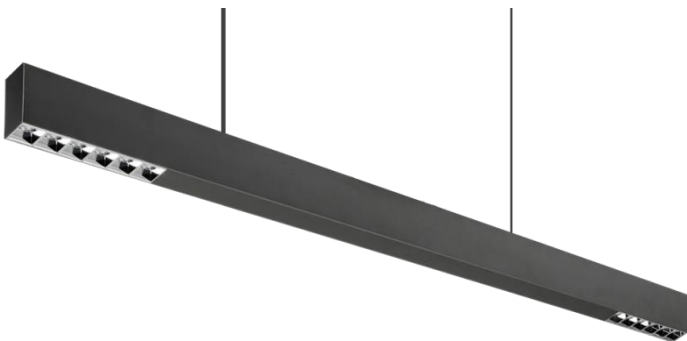


Light Distribution

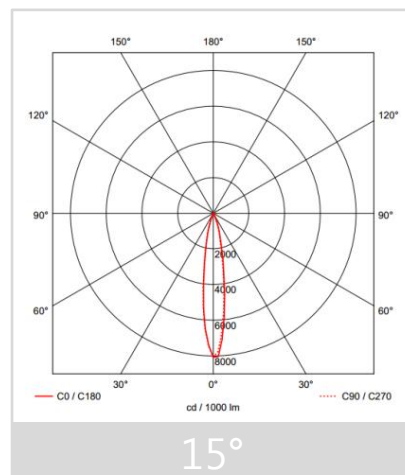

Description

Dimension(mm)	W1,200×D41×H80mm
Power Consumption(W)	61W
Input Voltage(V)	AC 220~240V 50~60Hz
Output Voltage(V)	UP - DC 24V / 1050mA / 33W Down - DC 36V / 500mA / 22W
Material	AL
Beam Angle(°)	15° / 35°
Color Temperature - Control	3000K 4000K 5000K Switchable / 1~10V Dimmable DALI Dimmable
Body Color	Black White Gray



Up Light
24V 1050mA 33W
Down Light
A. 36V 500mA 22W
B. 36V 700mA 28W




Regular
Dark Light




Optional
Black

LO-EP160C-055IXKWH

MonoRex™

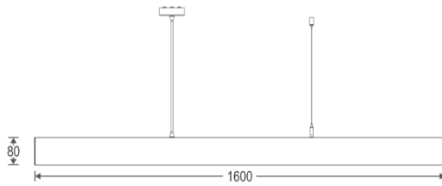


Light Distribution

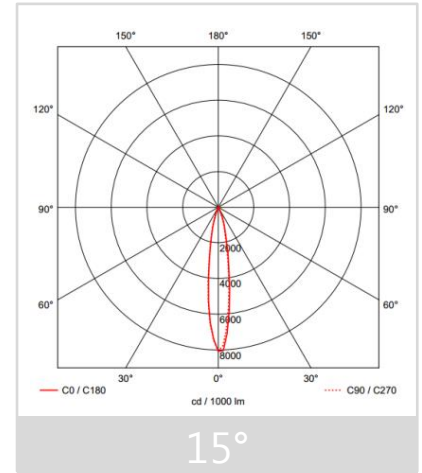


Description

Dimension(mm)	W1,600×D41xH80mm
Power Consumption(W)	55W
Input Voltage(V)	AC 220~240V 50~60Hz
Output Voltage(V)	UP - DC 24V / 1050mA / 33W Down - DC 36V / 500mA / 22W
Material	AL
Beam Angle(°)	15° / 35°
Color Temperature - Control	3000K 4000K 5000K Switchable / 1~10V Dimmable DALI Dimmable
Body Color	Black White Gray



Up Light
24V 1050mA 33W
Down Light
A. 36V 500mA 22W
B. 36V 700mA 28W





Regular
Dark Light




Optional
Black

LO-EP160C-061IXKWH

MonoRex™

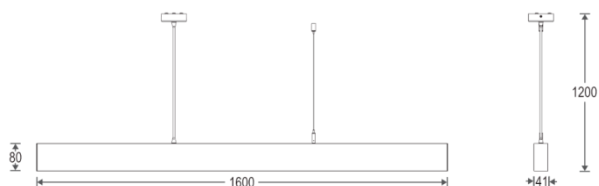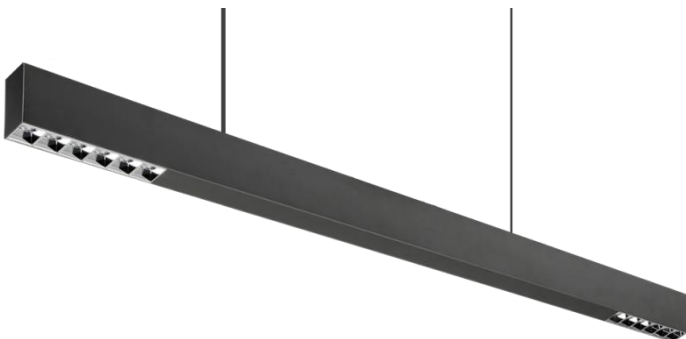


Light Distribution

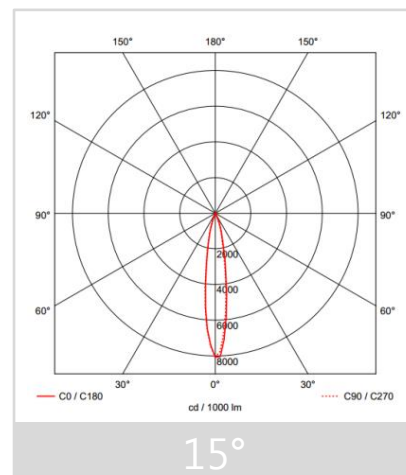

Description

Dimension(mm)	W1,600×D41xH80mm
Power Consumption(W)	61W
Input Voltage(V)	AC 220~240V 50~60Hz
Output Voltage(V)	UP - DC 24V / 1050mA / 33W Down - DC 36V / 500mA / 22W
Material	AL
Beam Angle(°)	15° / 35°
Color Temperature - Control	3000K 4000K 5000K Switchable / 1~10V Dimmable DALI Dimmable
Body Color	Black White Gray





Up Light
24V 1050mA 33W
Down Light
A. 36V 500mA 22W
B. 36V 700mA 28W




Regular
Dark Light



Optional
Black




Light Distribution

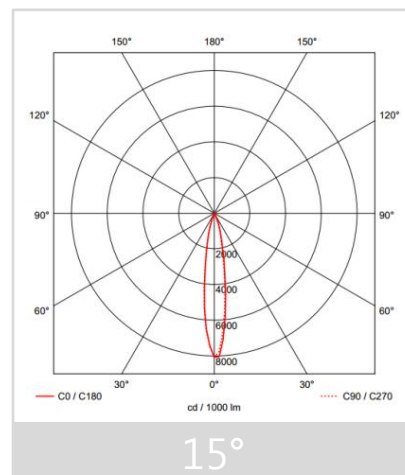


Description

Dimension(mm)	W183×D41×H158mm
Power Consumption(W)	20W
Input Voltage(V)	AC 220~240V 50~60Hz
Output Voltage(V)	DC 24V / 500mA
Material	AL
Beam Angle(°)	15° / 35°
Color Temperature - Control	■ 2700K ■ 3000K ■ 4000K Switchable / TRIAC Dimmable 1~10V Dimmable / DALI Dimmable
Body Color	● Black ● White



Wide Flood




Spot

Regular
Dark LightOptional
Black

MonoRex™ Series Panel Light (M-Bar) Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

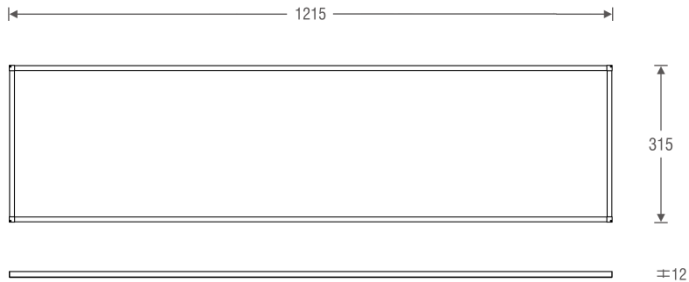

White

Light Distribution

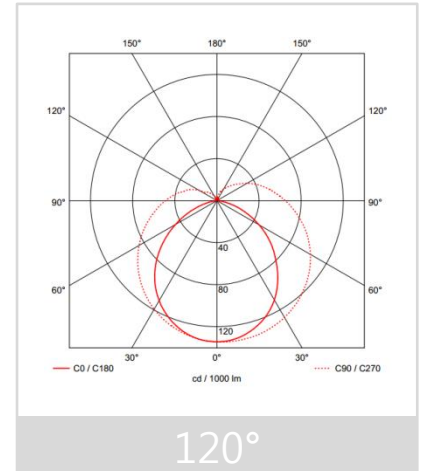

Description


Dimension - W1,215×D315×H12mm
 Cut Out - SMPS Hole (W260×D82mm)
 Power Consumption - 40W
 Luminous Flux - 4,394lm
 Luminous Efficacy - 109lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - ■ 4000K ■ 6500K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 5630


SMPS

Manufacturer - Power In
 SMPS Type - External
 Dimension - W206×D35×H15mm
 Power Consumption - 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 165V / 260mA
 Control - Switchable
 Features - Flicker Free

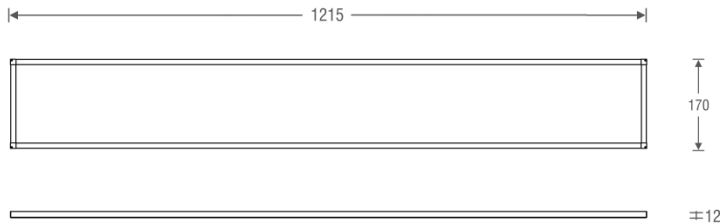

White

Light Distribution

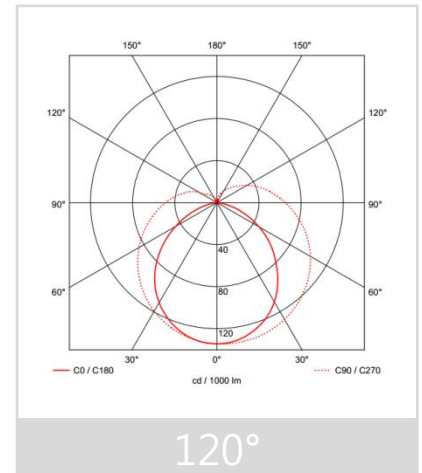

Description


Dimension - W1,215×D170×H12mm
 Cut Out - SMPS Hole (W260×D82mm)
 Power Consumption - 40W
 Luminous Flux - 4,259lm
 Luminous Efficacy - 106lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 4000K 6500K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

SMPS

Manufacturer - Power In
 SMPS Type - External
 Dimension - W206×D35×H15mm
 Power Consumption - 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 165V / 260mA
 Control - Switchable
 Features - Flicker Free


LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 5630

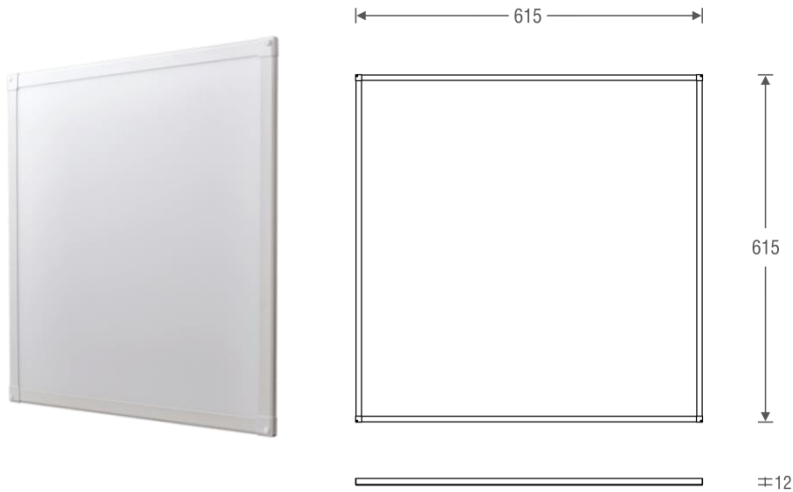

White

Light Distribution

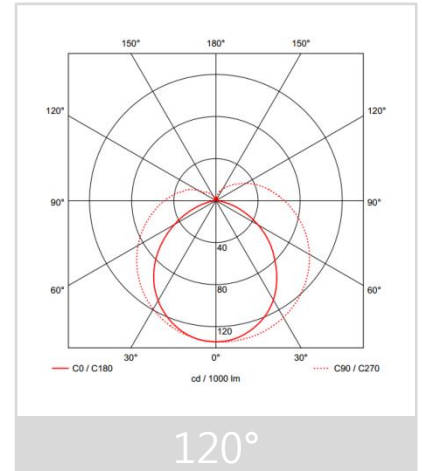

Description

Dimension - W615×D615×H12mm
 Cut Out - SMPS Hole (W260×D82mm)
 Power Consumption - 40W
 Luminous Flux - 4,638lm
 Luminous Efficacy - 109lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - ■ 4000K ■ 6500K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

SMPS

Manufacturer - Power In
 SMPS Type - External
 Dimension - W206×D35×H15mm
 Power Consumption - 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 165V / 260mA
 Control - Switchable
 Features - Flicker Free

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 5630



615




315



±12

White

Light Distribution

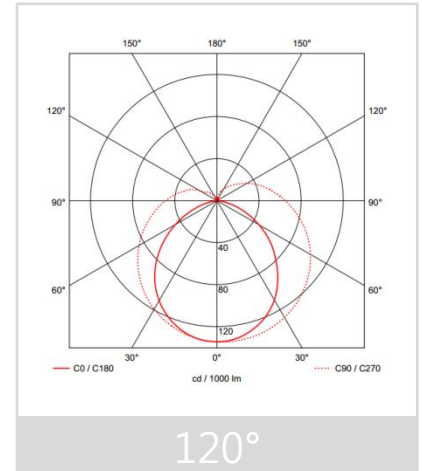

Description

Dimension - W615×D315×H12mm
 Cut Out - SMPS Hole (W172×D85mm)
 Power Consumption - 20W
 Luminous Flux - 1,920lm
 Luminous Efficacy - 96lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 4000K 6500K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 5630

SMPS

Manufacturer - Power In
 SMPS Type - External
 Dimension - W206×D35×H15mm
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 165V / 130mA
 Control - Switchable
 Features - Flicker Free



615




170



±12

White

Light Distribution

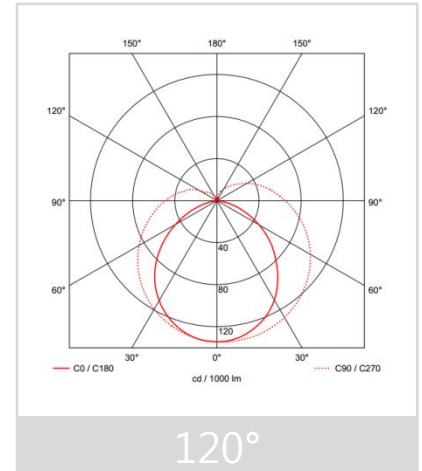

Description


Dimension - W615×D170×H12mm
 Cut Out - SMPS Hole (W172×D85mm)
 Power Consumption - 20W
 Luminous Flux - 1,920lm
 Luminous Efficacy - 96lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 4000K 6500K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 5630


SMPS

Manufacturer - Power In
 SMPS Type - External
 Dimension - W206×D35×H15mm
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 165V / 130mA
 Control - Switchable
 Features - Flicker Free

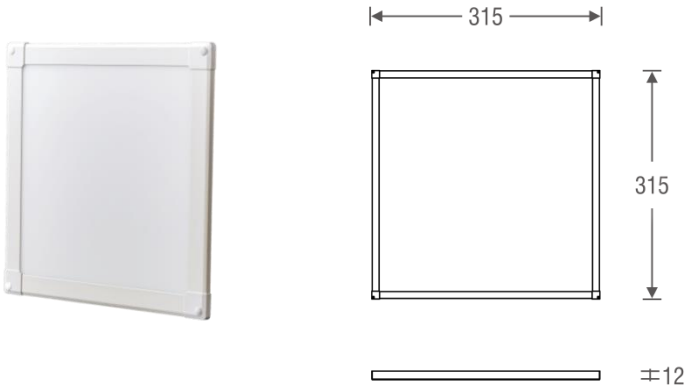

White

Light Distribution

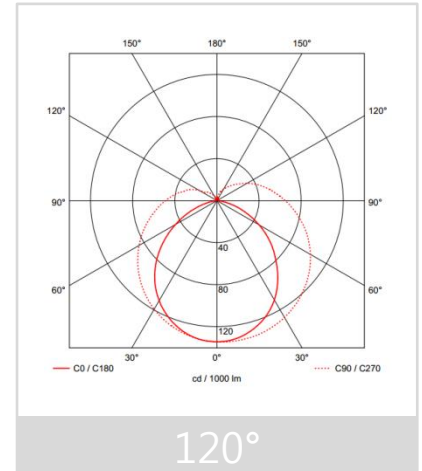

Description

Dimension - W315×D315×H12mm
 Cut Out - SMPS Hole (W172×D85mm)
 Power Consumption - 20W
 Luminous Flux - 1,880lm
 Luminous Efficacy - 94lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 4000K 6500K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 5630



SMPS

Manufacturer - Power In
 SMPS Type - External
 Dimension - W206×D35×H15mm
 Power Consumption - 20W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 165V / 130mA
 Control - Switchable
 Features - Flicker Free

MonoRex™ Series Panel Light (T-Bar) Specifications



Light Distribution

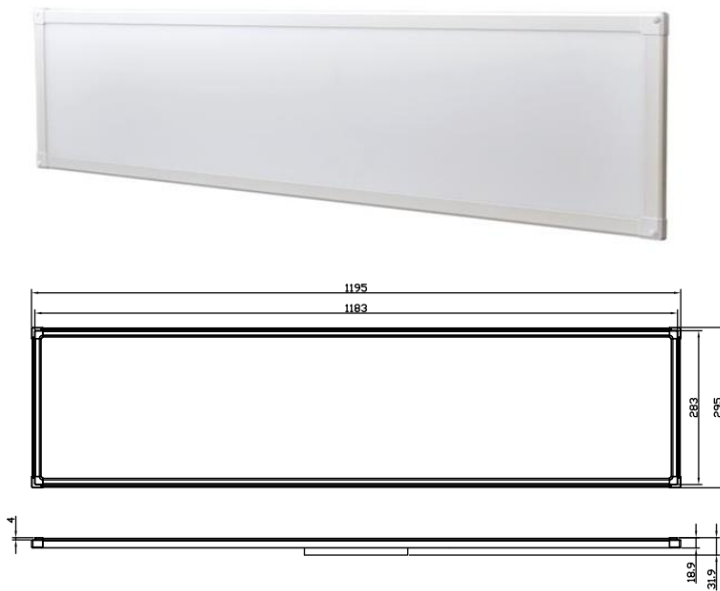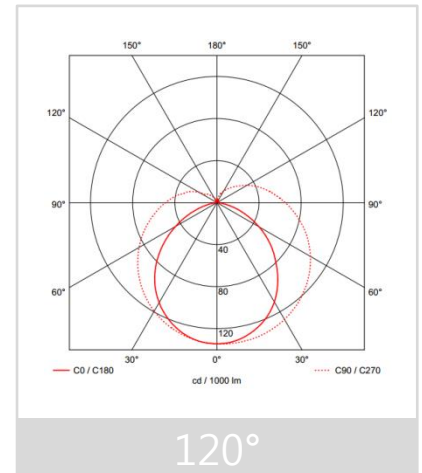

White

Description


Dimension - W1,195×D295×H18.9mm (T-bar)
 Cut Out - W1,183×D283mm
 Power Consumption - 40W
 Luminous Flux - 4,394lm
 Luminous Efficacy - 109lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - ■ 4000K ■ 6500K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 5630


SMPS

Manufacturer - Power In
 SMPS Type - External
 Dimension - W206×D35×H15mm
 Power Consumption - 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 165V / 260mA
 Control - Switchable
 Features - Flicker Free

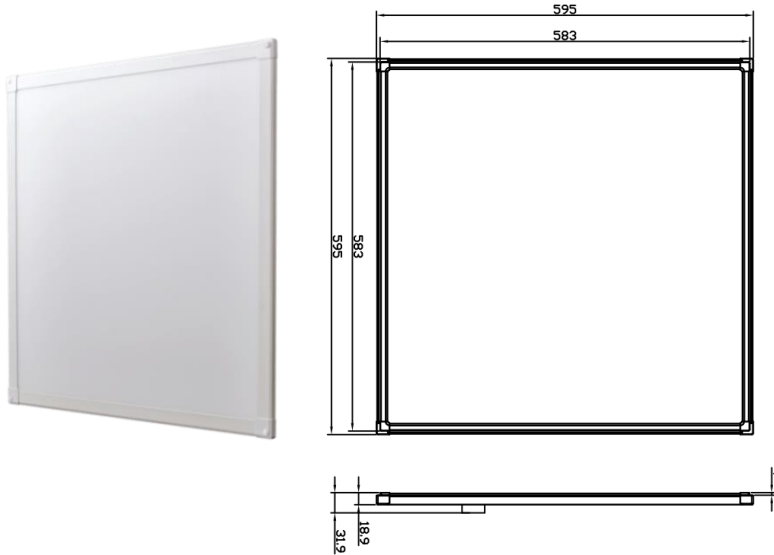

White

Light Distribution

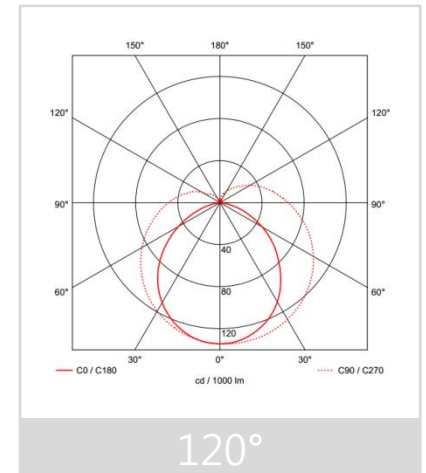

Description

Dimension – W595×D595×H18.9mm (T-bar)
 Cut Out – W583×D583mm
 Power Consumption - 40W
 Luminous Flux - 4,638lm
 Luminous Efficacy - 109lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 4000K 6500K
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Switchable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 5630

SMPS

Manufacturer - Power In
 SMPS Type - External
 Dimension - W206×D35×H15mm
 Power Consumption - 40W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 165V / 260mA
 Control - Switchable
 Features - Flicker Free


MonoRex™ Series

Ceiling Light

Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

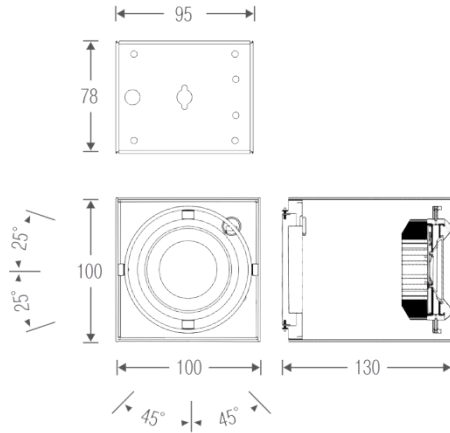

White
 Gray
 Black

Light Distribution

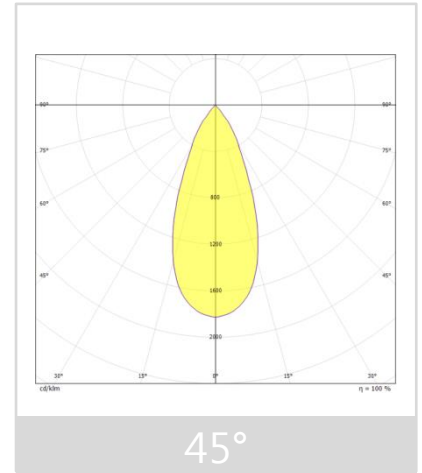

Description


Dimension - W100×D100×H300mm
 Power Consumption - 15W
 Luminous Flux - 1,020lm
 Luminous Efficacy - 68lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 45°
 Color Temperature - ■ 3000K ■ 4000K ■ 6000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable / TRIAC Dimmable

SMPS

Manufacturer - Osram
 SMPS Type - External
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 21-42V / 350mA
 Control - Switchable


LED

Manufacturer - Philips



■ White ■ Black

Light Distribution

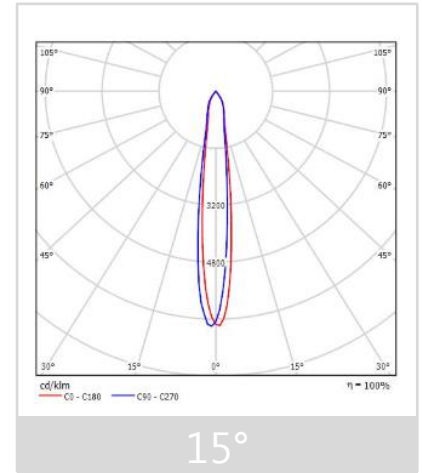

Description

Dimension - Ø58×H180mm
 Power Consumption - 15W
 Luminous Flux - 604lm
 Luminous Efficacy - 40lm/W
 Material - Body: Aluminum / Cover: Tempered Glass
 Beam Angle - 15° / 24° / 38°
 Color Temperature - ■ 3000K ■ 4000K ■ 5000K
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Switchable

SMPS

SMPS Type - Internal
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 350mA
 Control - Switchable

LED

Manufacturer - Lumileds
 Package Series - COB 1203

MonoRex™ Series

Tube Light T5


Specifications



CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

T5-ET1200-018I6KWH

MonoRex™

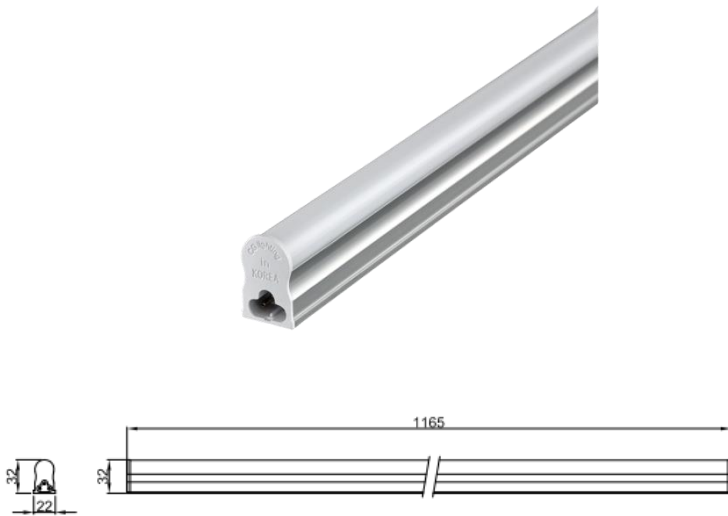

White


Description

Dimension - W1,165×D22×H32mm
Power Consumption - 18W
Luminous Flux - 1,530lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000K 4000K 6000K RGB
CRI - Ra >80
Life Time - 30,000hrs
Control - Switchable / TRIAC Dimmable
Remark - 최대 연결개수 8ea

LED

Manufacturer - Sanan
Package Series - SMD2835

Light Distribution

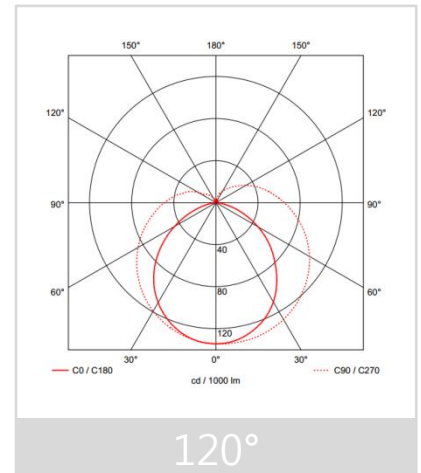


SMPS

SMPS Type - Internal
Input Voltage - AC 220-240V / 50-60Hz
Operating Voltage - DC 50-75V / 230mA
Control - Switchable / TRIAC Dimmable

T5-ET0900-011I6KWH

MonoRex™

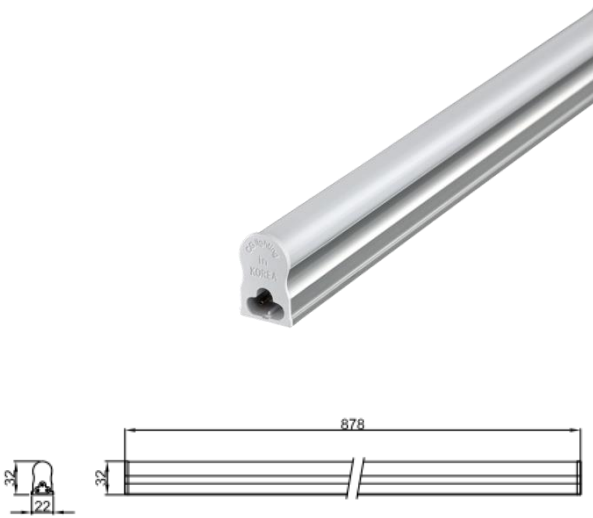

White


Description

Dimension - W878×D22×H32mm
Power Consumption - 11W
Luminous Flux - 935lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000K 4000K 6000K RGB
CRI - Ra >80
Life Time - 30,000hrs
Control - Switchable / TRIAC Dimmable
Remark - 최대 연결개수 10ea

LED

Manufacturer - Sanan
Package Series - SMD2835

Light Distribution

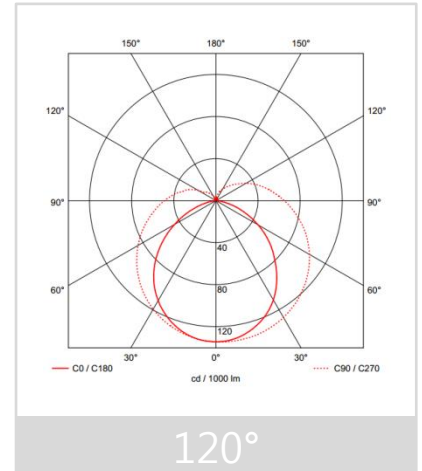


SMPS

SMPS Type - Internal
Input Voltage - AC 220-240V / 50-60Hz
Operating Voltage - DC 50-75V / 230mA
Control - Switchable / TRIAC Dimmable

T5-ET0600-008I6KWH

MonoRex™

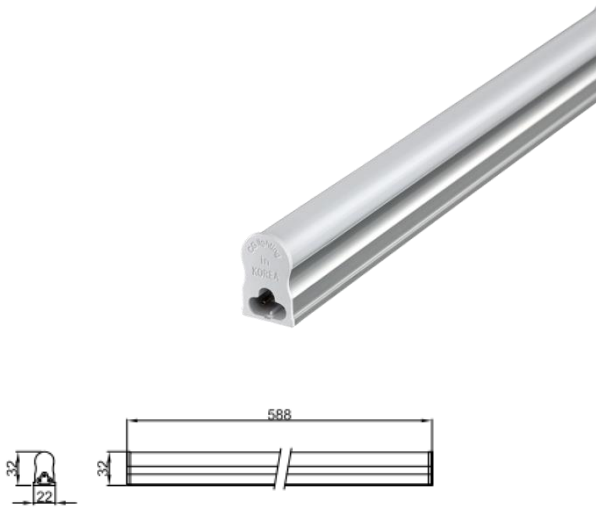

White


Description

Dimension - W588×D22×H32mm
Power Consumption - 8W
Luminous Flux - 680lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000K 4000K 6000K RGB
CRI - Ra >80
Life Time - 30,000hrs
Control - Switchable / TRIAC Dimmable
Remark - 최대 연결개수 15ea

LED

Manufacturer - Sanan
Package Series - SMD2835

Light Distribution

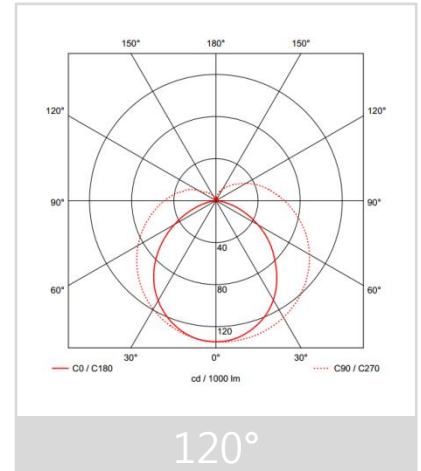


SMPS

SMPS Type - Internal
Input Voltage - AC 220-240V / 50-60Hz
Operating Voltage - DC 50-75V / 230mA
Control - Switchable / TRIAC Dimmable

T5-ET0300-004I6KWH

MonoRex™



White


Description

Dimension - W290×D22×H32mm
Power Consumption - 4W
Luminous Flux - 340lm
Luminous Efficacy - 85lm/W
Material - Body: Aluminum / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000K 4000K 6000K RGB
CRI - Ra >80
Life Time - 30,000hrs
Control - Switchable / TRIAC Dimmable
Remark - 최대 연결개수 30ea

LED

Manufacturer - Sanan
Package Series - SMD2835

Light Distribution

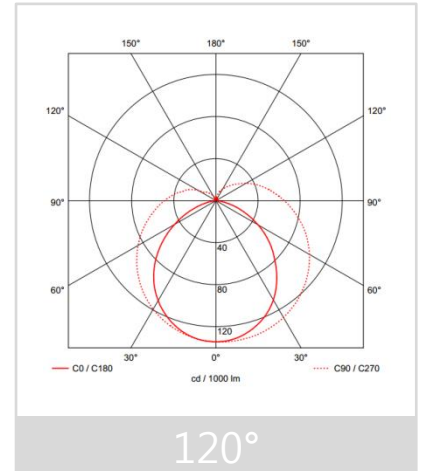

SMPS

SMPS Type - Internal
Input Voltage - AC 220-240V / 50-60Hz
Operating Voltage - DC 50-75V / 230mA
Control - Switchable / TRIAC Dimmable

ColoRex™ Specifications





Lightings beyond standard

CG Lighting, C509 Indeokwon IT Valley Imi-ro 40(653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

ColoRex™ Series Downlight Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

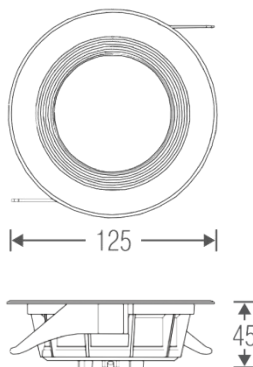

White

Light Distribution

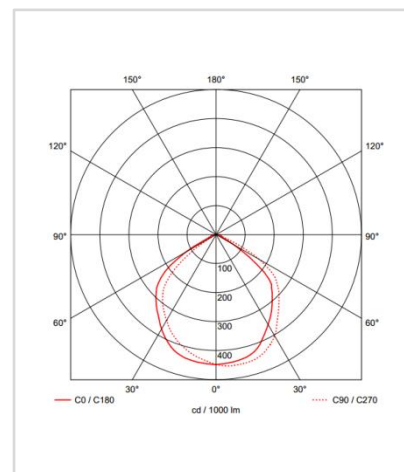

Description


Dimension - Ø125×H45mm
 Cut Out - Ø110mm
 Power Consumption - 7W
 Luminous Flux - 611lm
 Luminous Efficacy - 87lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 109°
 Color Temperature - 3000~6500K Color changeable
 CRI - Ra >80
 Life Time - 55,000hrs
 Control - Switchable / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W110×D42×H25mm
 Power Consumption - 7W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 30V / 260mA
 Control - Wireless Dimmable

LED


Manufacturer - Epistar
 Package Series - LT-DRT0702-WTC



175




45



White

Light Distribution

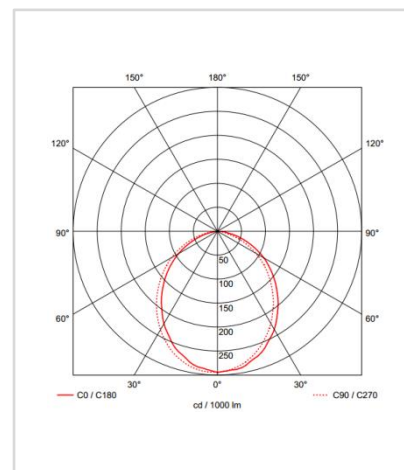

Description


Dimension - Ø175×H45mm
 Cut Out - Ø150mm
 Power Consumption - 15W
 Luminous Flux - 1,350lm
 Luminous Efficacy - 90lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 109°
 Color Temperature - 3000~6500K Color changeable
 CRI - Ra >80
 Life Time - 55,000hrs
 Control - Switchable / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W132×D45×H25mm
 Power Consumption - 15W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 30V / 350mA
 Control - Wireless Dimmable


LED

Manufacturer - Epistar
 Package Series - LT-DRT0804-WTC

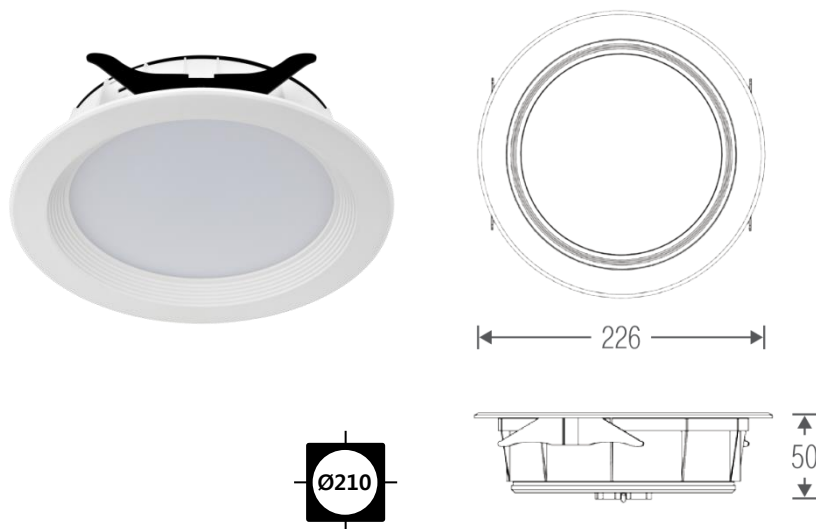

White

Light Distribution

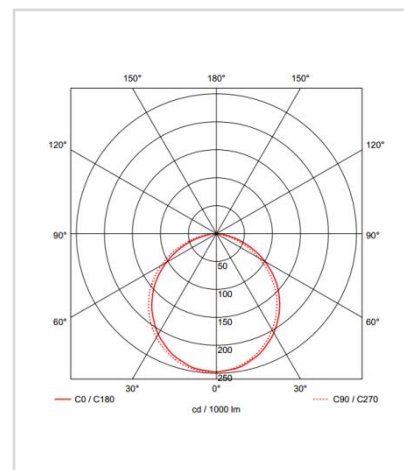

Description

Dimension - Ø226×H45mm
 Cut Out - Ø210mm
 Power Consumption - 30W
 Luminous Flux - 2,705lm
 Luminous Efficacy - 90lm/W
 Material - Body: Polycarbonate / Cover: Polycarbonate
 Beam Angle - 109°
 Color Temperature - 3000~6500K Color changeable
 CRI - Ra >80
 Life Time - 55,000hrs
 Control - Switchable / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W110×D42×H25mm
 Power Consumption - 30W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 30V / 840mA
 Control - Wireless Dimmable

LED

Manufacturer - Epistar
 Package Series - LT-DRT1604-WTC


CR-RR008I-050ECCWH

ColoRex™



■ White

■ Light Distribution

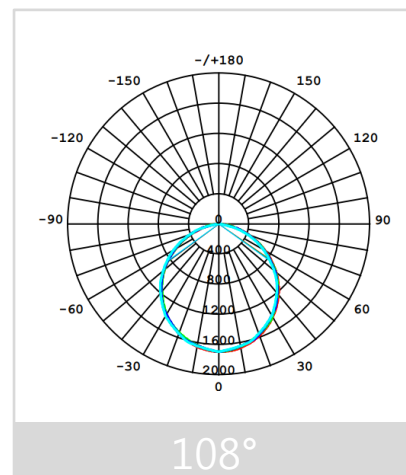

■ Description

Dimension - Ø230×H72mm
Cut Out - Ø205mm
Power Consumption - 50W
Luminous Flux - 4,100lm
Luminous Efficacy - 82lm/W
Material - Body: Polycarbonate / Cover: Polycarbonate
Beam Angle - 108°
Color Temperature - 3000K~6500K Color changeable
CRI - Ra >80
Life Time - 30,000hrs
Control - Switchable / Wireless Dimmable

■ SMPS

Manufacturer - CG Lighting
SMPS Type - External
Dimension - W220×D42×H27mm
Power Consumption - 50W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 36V / 1,140mA
Control - Wireless Dimmable

■ LED


Manufacturer - HONGLI
Package Series - 2835

ColoRex™ Series Track Light Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

CR-ET061C-020ECCWH

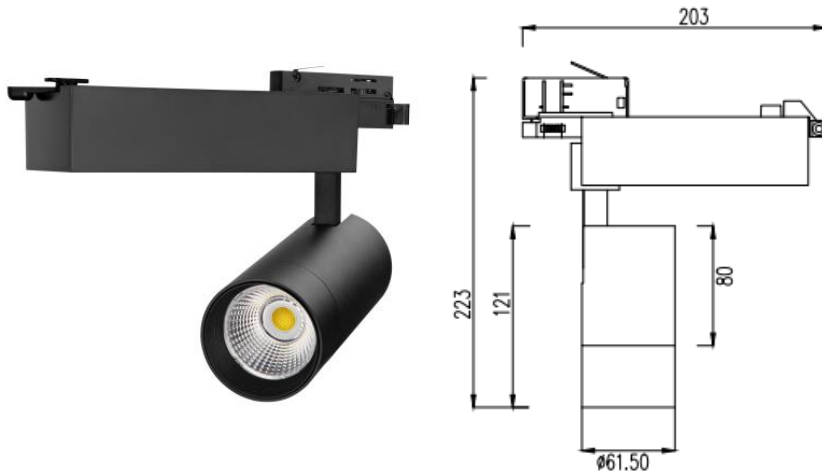

Light Distribution

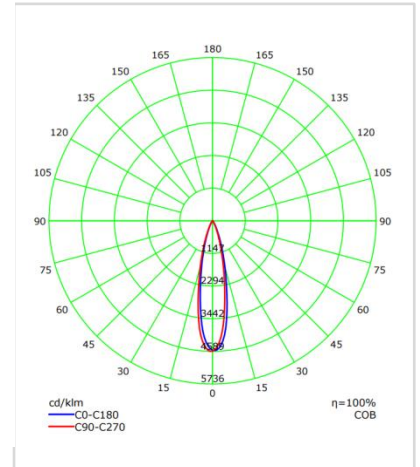

White Black

Description

Dimension - Ø61.5×H223mm / 원통길이(H121mm)
Power Consumption - 20W
Luminous Flux - 1,600lm
Luminous Efficacy - 80lm/W
Material - Body: Aluminum / Cover: Tempered Glass
Beam Angle - 24°
Color Temperature - 3000K~6500K Color changeable
CRI - Ra >80
Life Time - 20,000hrs
Control - Switchable / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
SMPS Type - External
Dimension - W110×D42×H25mm
Power Consumption - 20W
Input Voltage - AC 220~240V / 50~60Hz
Output Voltage - DC 36V / 560mA
Control - Wireless Dimmable


LED

Manufacturer -

ColoRex™ Series MR16 Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

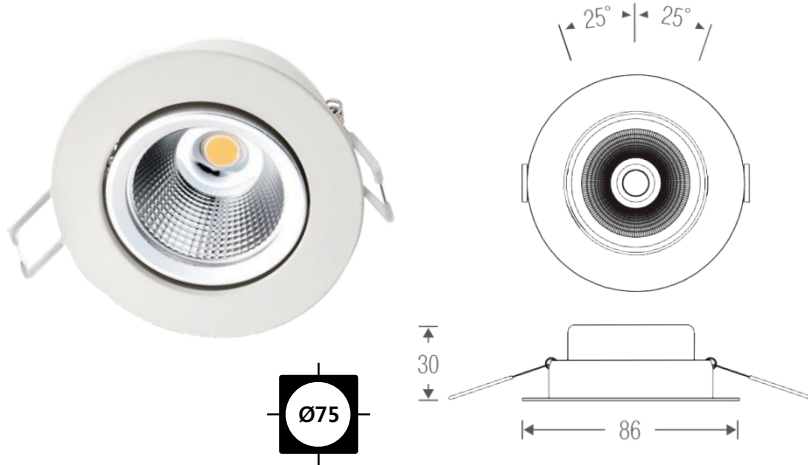

White Gray Black

Light Distribution

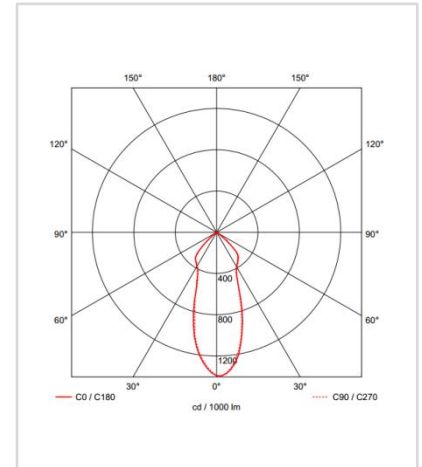

Description

Dimension - Ø86×H30mm
 Cut Out - Ø75mm
 Power Consumption - 7W
 Luminous Flux - 490lm
 Luminous Efficacy - 70lm/W
 Material - Body: Aluminum
 Beam Angle - 24°
 Color Temperature - 3000K~6500K Color changeable
 CRI - Ra >80
 Life Time - 10,000hrs
 Control - Switchable / Wireless Dimmable

SMPS

Manufacturer - CG Lighting
 SMPS Type - External
 Dimension - W110×D42×H25mm
 Power Consumption - 7W
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 21V / 280mA
 Control - Wireless Dimmable

LED

Manufacturer -

ColoRex™ Series Ceiling Light Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

풀엣지 발코니등 255


스위치
색변환

ColoRex™

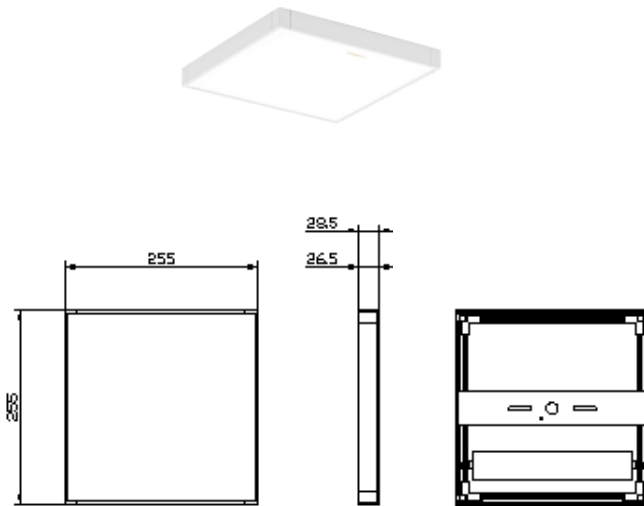

White

Light Distribution

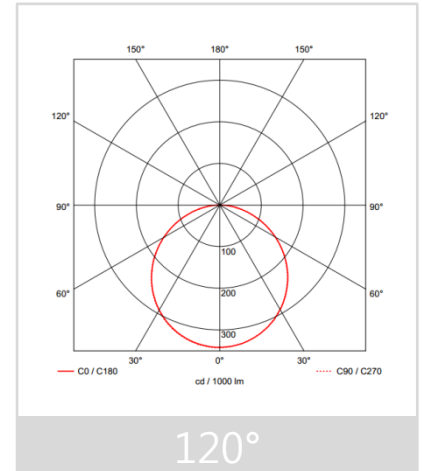

Description

Dimension - W255 × D255 × H28mm
Cut Out - SMPS Hole (W172×D85mm)
Power Consumption - 25W
Luminous Flux - 2,000lm
Luminous Efficacy - 80lm/W
Material - Body: AL / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000K / 4500K / 6500K
Color Changeable

CRI - Ra >80
Life Time - 50,000hrs
Control - Switchable

LED

Manufacturer - Seoul Semiconductor
Package Series - SMD 3528


SMPS

Manufacturer - (주)씨지라이트
SMPS Type - External
Dimension - W110×D42×H25mm
Power Consumption - 25W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 36V / 560mA
Control - Switchable

폴렛지 욕실 / 발코니등 350


스위치
색변환

ColoRex™

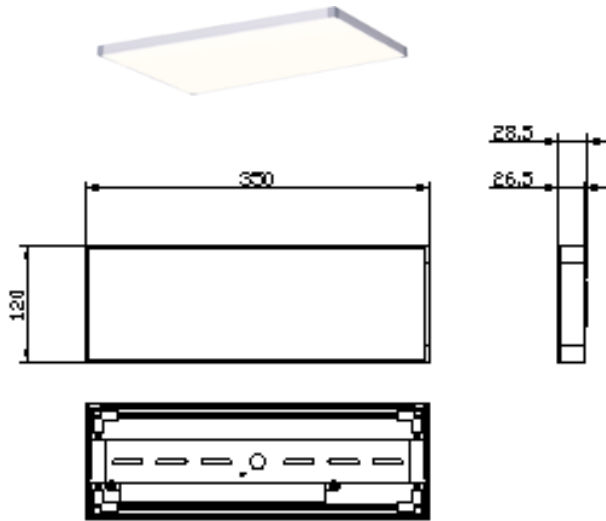

White

Light Distribution

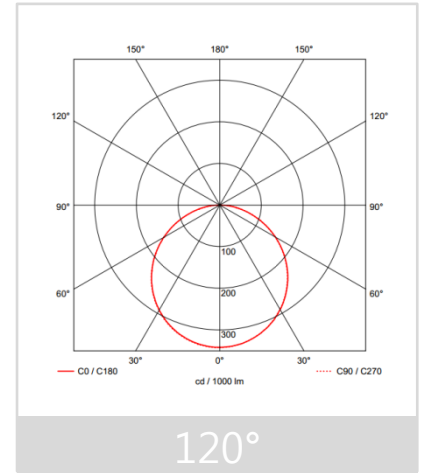

Description

Dimension - W350 × D120 × H28mm
Cut Out - SMPS Hole (W172×D85mm)
Power Consumption - 25W
Luminous Flux - 2,000lm
Luminous Efficacy - 80lm/W
Material - Body: AL / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000K / 4500K / 6500K
Color Changeable

CRI - Ra >80
Life Time - 50,000hrs
Control - Switchable

LED


Manufacturer - Seoul Semiconductor
Package Series - SMD 3528

SMPS

Manufacturer - (주)씨지라이트
SMPS Type - External
Dimension - W110×D42×H25mm
Power Consumption - 25W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 36V / 560mA
Control - Switchable

폴렛지 주방등 620

ColoRex™

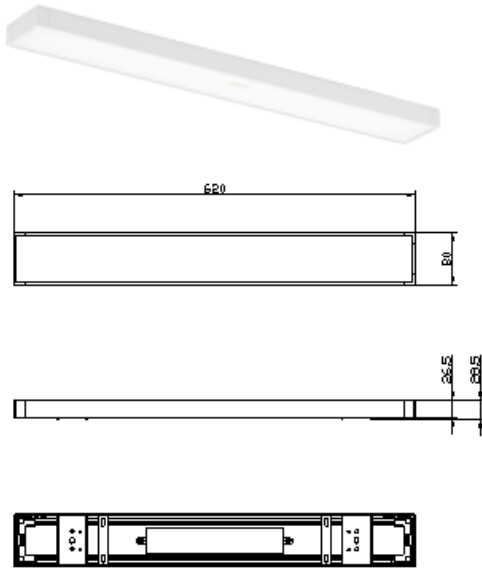

■ White


■ Description

Dimension - W620 × D80 × H28mm
Cut Out - SMPS Hole (W172×D85mm)
Power Consumption - 30W
Luminous Flux - 2,400lm
Luminous Efficacy - 80lm/W
Material - Body: AL / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000~6500K Color Changeable
CRI - Ra >80
Life Time - 50,000hrs
Control - Wireless Dimmable

■ LED

Manufacturer - Seoul Semiconductor
Package Series - SMD 3528

■ Light Distribution

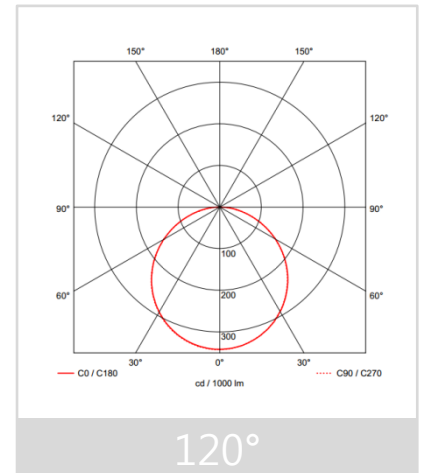


■ SMPS

Manufacturer - (주)씨지라이트
SMPS Type - External
Dimension - W110×D42×H25mm
Power Consumption - 30W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 42V / 600mA
Control - Wireless Dimmable


폴엣지 방등 520

ColoRex™

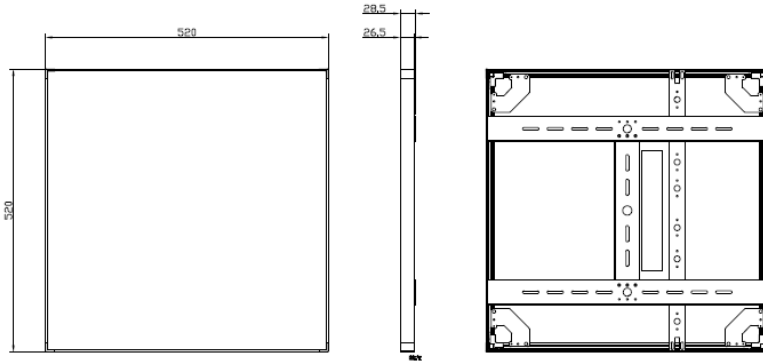

White

Light Distribution

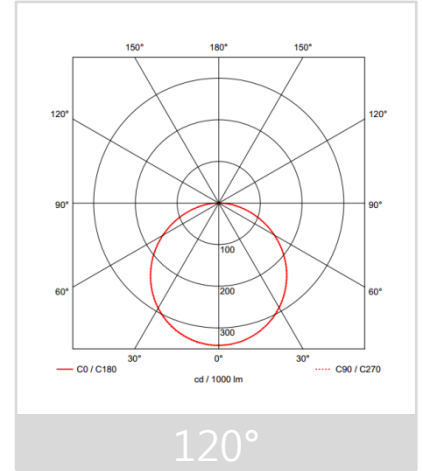

Description

Dimension – W520 × D520 × H28mm
Cut Out - SMPS Hole (W260×D82mm)
Power Consumption - 60W
Luminous Flux – 5,100lm
Luminous Efficacy - 85lm/W
Material - Body: AL / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000~6500K Color Changeable
CRI - Ra >80
Life Time - 50,000hrs
Control - Wireless Dimmable

SMPS


Manufacturer - (주)씨지라이트
SMPS Type - External
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 42V / 1,200mA
Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
Package Series - SMD 3528


풀엣지 방등 620

ColoRex™

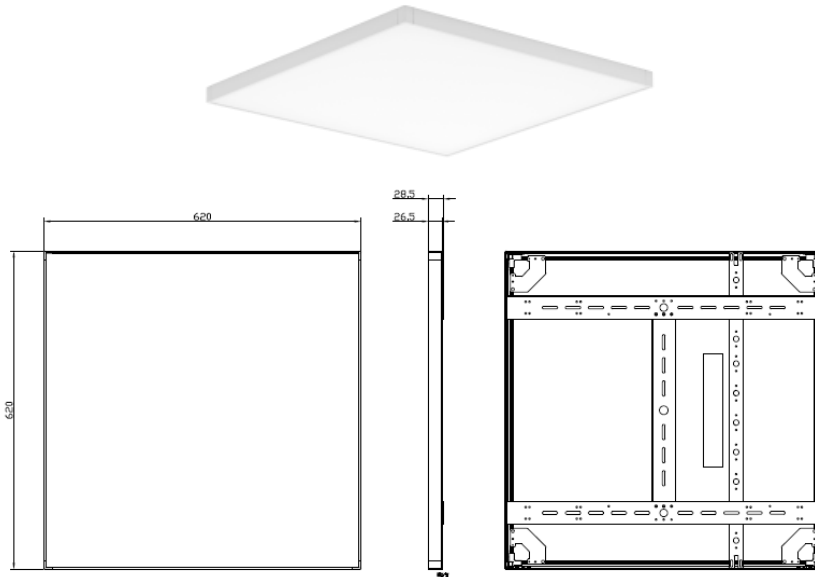

■ White

Light Distribution

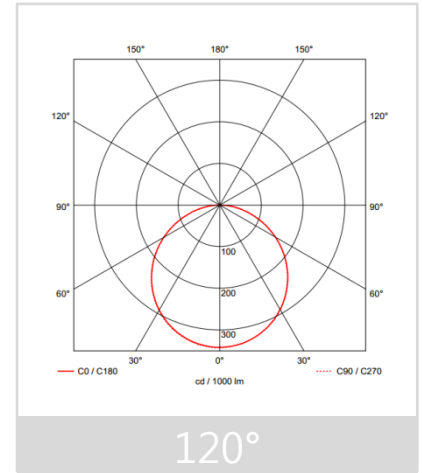

Description

Dimension – W620 × D620 × H28mm
Cut Out - SMPS Hole (W260×D82mm)
Power Consumption - 60W
Luminous Flux – 5,100lm
Luminous Efficacy - 85lm/W
Material - Body: AL / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000~6500K Color Changeable
CRI - Ra >80
Life Time - 50,000hrs
Control - Wireless Dimmable

SMPS

Manufacturer - (주)씨지라이트
SMPS Type - External
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 42V / 1,200mA
Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
Package Series - SMD 3528

폴엣지 주방등 1220

ColoRex™



■ White


■ Description

Dimension - W1,220 × D80 × H28mm
Cut Out - SMPS Hole (W220×D40mm)
Power Consumption - 60W
Luminous Flux - 5,100lm
Luminous Efficacy - 85lm/W
Material - Body: AL / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000~6500K Color Changeable
CRI - Ra >80
Life Time - 50,000hrs
Control - Wireless Dimmable

■ LED

Manufacturer - Seoul Semiconductor
Package Series - SMD 3528

■ Light Distribution

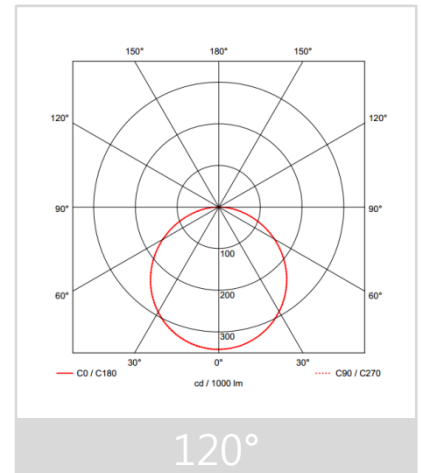


■ SMPS

Manufacturer - (주)씨지라이트
SMPS Type - External
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 42V / 1,200mA
Control - Wireless Dimmable

폴렛지 거실등 1220

ColoRex™

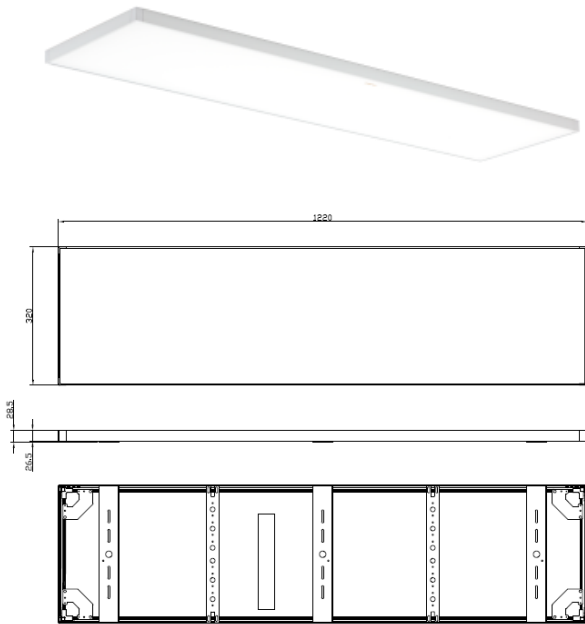

■ White


■ Description

Dimension - W1,220 × D320 × H28mm
Cut Out - SMPS Hole (W260×D82mm)
Power Consumption - 60W
Luminous Flux - 5,100lm
Luminous Efficacy - 85lm/W
Material - Body: AL / Cover: Polycarbonate
Beam Angle - 120°
Color Temperature - 3000~6500K Color Changeable
CRI - Ra >80
Life Time - 50,000hrs
Control - Wireless Dimmable

■ LED

Manufacturer - Seoul Semiconductor
Package Series - SMD 3528

■ Light Distribution

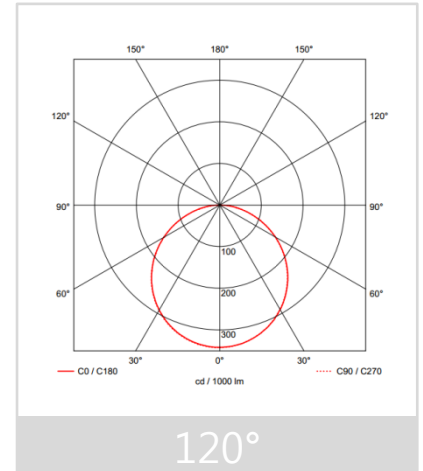

■ SMPS

Manufacturer - (주)씨지라이트
SMPS Type - External
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 220-240V / 50-60Hz
Output Voltage - DC 42V / 1,200mA
Control - Wireless Dimmable



*** 520x520 4개 구성**

■ White


Description

Dimension - W1,040 × D1,040 × H28mm
 Cut Out - SMPS Hole (W260×D82mm) x 4
 Power Consumption - 60W x 4
 Luminous Flux - 20,400lm
 Luminous Efficacy - 85lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

Light Distribution

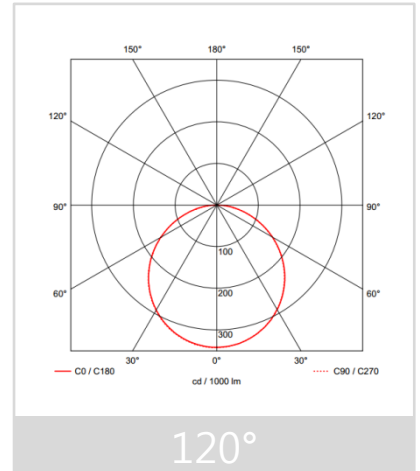

SMPS

Manufacturer - (주)씨지라이트
 SMPS Type - External
 Dimension - W220×D42×H27mm
 Power Consumption - 60W x 4
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 42V / 1,200mA
 Control - Wireless Dimmable



*** 520x520 + 620x620 2세트 구성**

■ White


Description

Dimension - W1,760 × D1,760 × H28mm
 Cut Out - SMPS Hole (W260×D82mm) x 4
 Power Consumption - 60W x 4
 Luminous Flux - 20,400lm
 Luminous Efficacy - 85lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Wireless Dimmable

LED


Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

Light Distribution

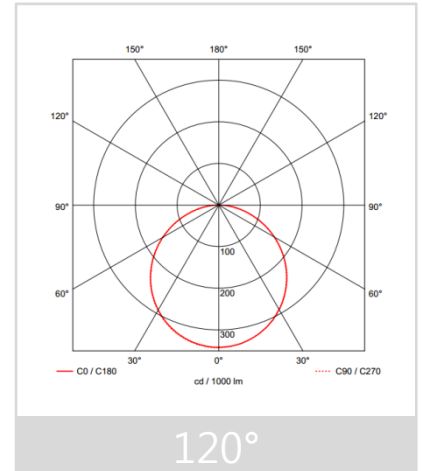

SMPS

Manufacturer - (주)씨지라이트
 SMPS Type - External
 Dimension - W220×D42×H27mm
 Power Consumption - 60W x 4
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 42V / 1,200mA
 Control - Wireless Dimmable

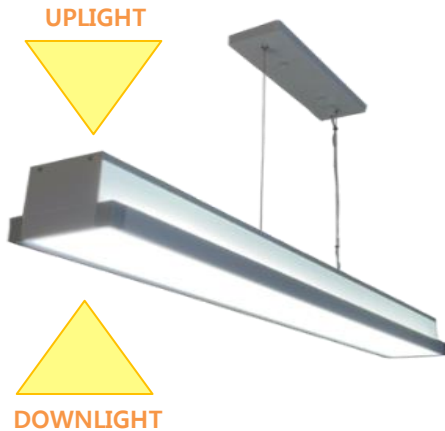

■ White


Description

Dimension – W1,000 × D120 × H85mm
 Power Consumption – 30W x 2
 Luminous Flux – 5,100lm
 Luminous Efficacy – 85lm/W
 Material – Body: AL / Cover: Polycarbonate
 Beam Angle – 120°
 Color Temperature – 3000~6500K Color Changeable
 CRI – Ra >80
 Life Time – 50,000hrs
 Control – Wireless Dimmable

LED

Manufacturer – Seoul Semiconductor
 Package Series – SMD 3528

Light Distribution

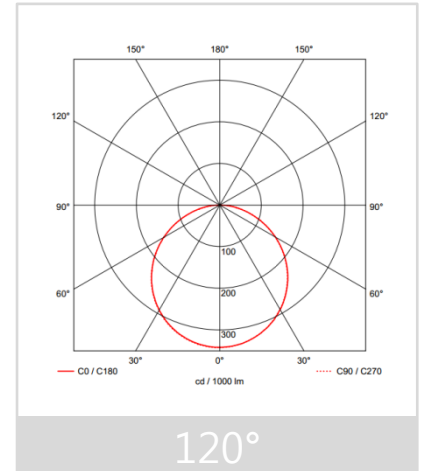

SMPS

Manufacturer – (주)씨지라이팅
 SMPS Type – External
 Power Consumption – 30W x 2
 Input Voltage – AC 220-240V / 50-60Hz
 Output Voltage – DC 42V / 600mA
 Control – Wireless Dimmable



■ White

■ Description

Dimension - Ø480xH100mm
Installation - Direct Mounting
Power Consumption - 48W
Luminous Flux - 4,080lm
Luminous Efficacy - 85lm/W
Material - Body: Steel / Cover: PMMA
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220xD42xH27mm
Power Consumption - 50W
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 50V / 1200mA
Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
Package Series - LG 3528



■ White

■ Description

Dimension - Ø600×H100mm
Installation - Direct Mounting
Power Consumption - 60W
Luminous Flux - 5,100lm
Luminous Efficacy - 85lm/W
Material - Body: Steel / Cover: PMMA
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 55V / 1200mA
Control - Wireless Dimmable


■ LED

Manufacturer - LG Innotek
Package Series - LG 3528

ColoRex™ Series Panel Light Specifications




CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747

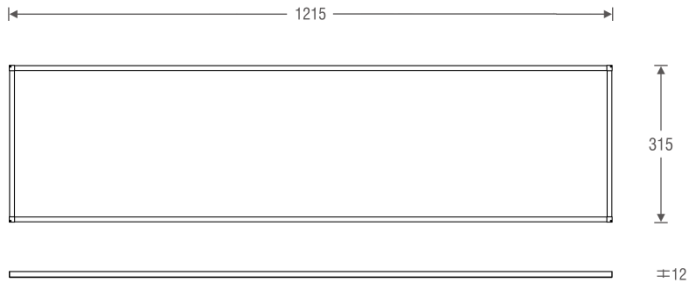

White

Light Distribution

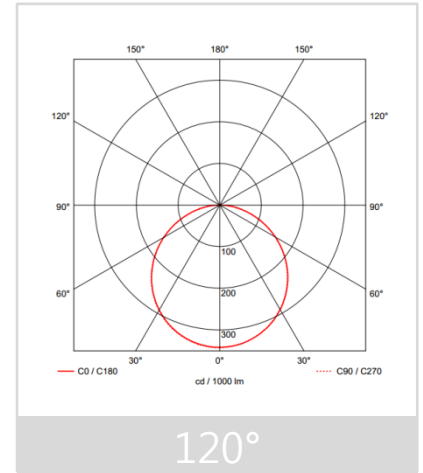

Description


Dimension - W1,215×D315×H12mm
 Cut Out - SMPS Hole (W260×D82mm)
 Power Consumption - 45W
 Luminous Flux - 4,185lm
 Luminous Efficacy - 93lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Wireless Dimmable

SMPS

Manufacturer - (주)씨지라이트
 SMPS Type - External
 Dimension - W220×D42×H27mm
 Power Consumption - 45W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 1140mA
 Control - Wireless Dimmable


LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

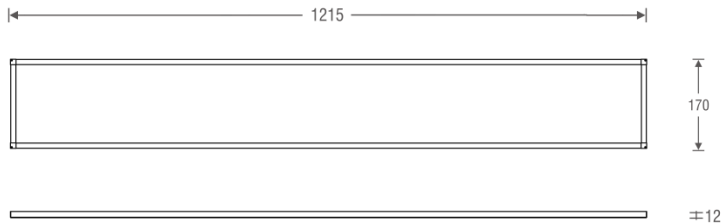

White

Light Distribution

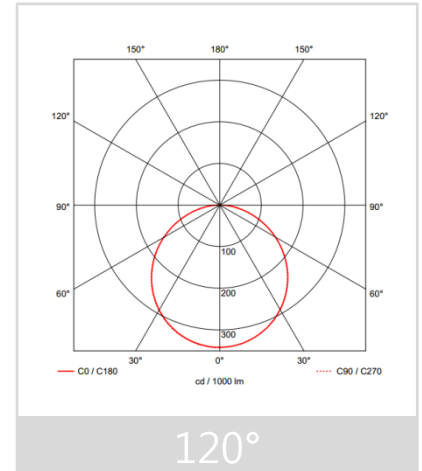

Description


Dimension - W1,215×D170×H12mm
 Cut Out - SMPS Hole (W260×D82mm)
 Power Consumption - 45W
 Luminous Flux - 4,185lm
 Luminous Efficacy - 93lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Wireless Dimmable

SMPS

Manufacturer - (주)씨지라이트
 SMPS Type - External
 Dimension - W220×D42×H27mm
 Power Consumption - 45W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 1140mA
 Control - Wireless Dimmable


LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

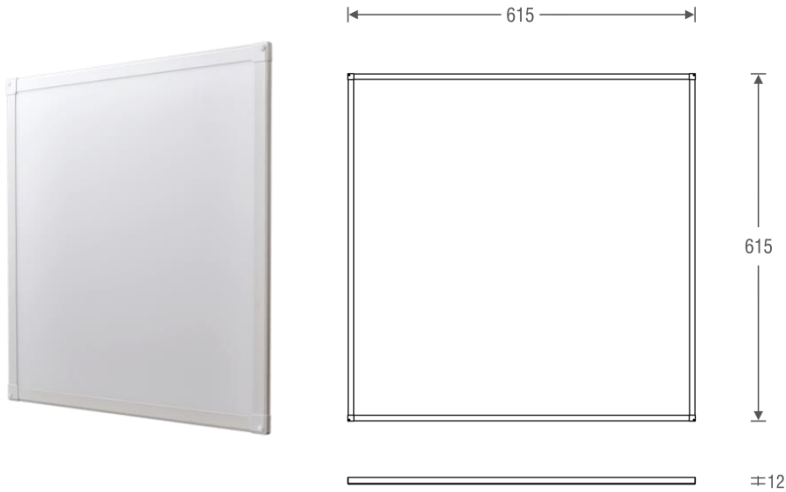

White

Light Distribution

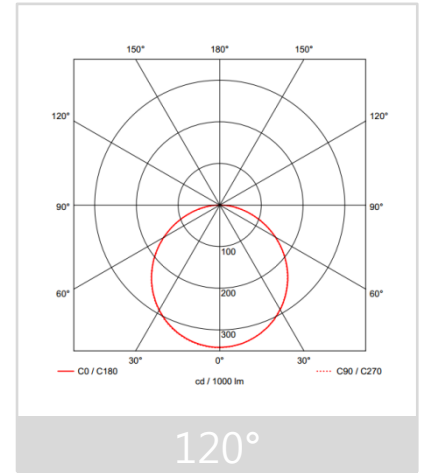

Description


Dimension - W615×D615×H12mm
 Cut Out - SMPS Hole (W260×D82mm)
 Power Consumption - 45W
 Luminous Flux - 4,545lm
 Luminous Efficacy - 101lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color changeable
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Wireless Dimmable

SMPS

Manufacturer - (주)씨지라이트
 SMPS Type - External
 Dimension - W220×D42×H27mm
 Power Consumption - 45W
 Input Voltage - AC 220-240V / 50-60Hz
 Output Voltage - DC 36V / 1140mA
 Control - Wireless Dimmable


LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

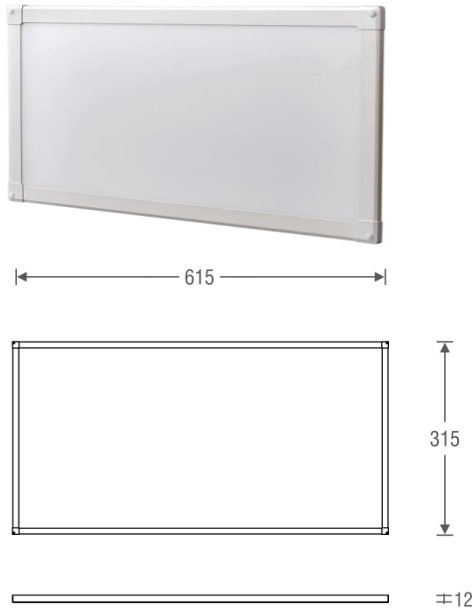

White

Light Distribution

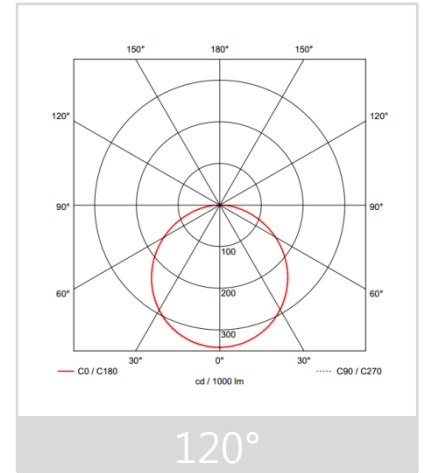

Description

Dimension - W615×D315×H12mm
 Cut Out - SMPS Hole (W172×D85mm)
 Power Consumption - 24W
 Luminous Flux - 2,314lm
 Luminous Efficacy - 96lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

SMPS

Manufacturer - (주)씨지라이팅
 SMPS Type - External
 Dimension - W110×D42×H25mm
 Power Consumption - 24W
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 36V / 560mA
 Control - Wireless Dimmable



615




170



±12

White

Light Distribution

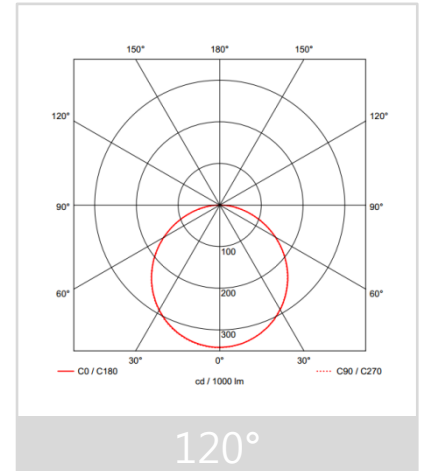

Description


Dimension - W615×D170×H12mm
 Cut Out - SMPS Hole (W172×D85mm)
 Power Consumption - 24W
 Luminous Flux - 2,314lm
 Luminous Efficacy - 96lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528


SMPS

Manufacturer - (주)씨지라이트
 SMPS Type - External
 Dimension - W110×D42×H25mm
 Power Consumption - 24W
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 36V / 560mA
 Control - Wireless Dimmable

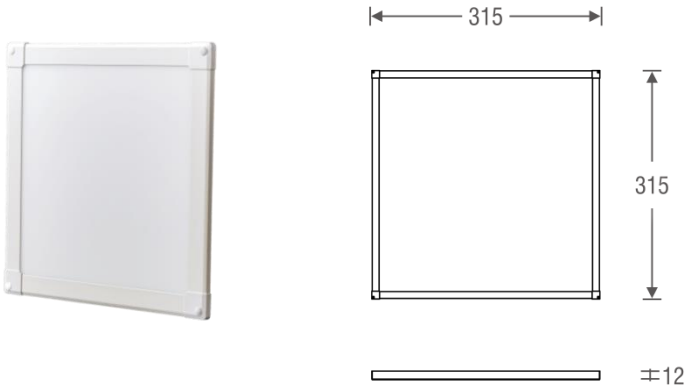

White

Light Distribution

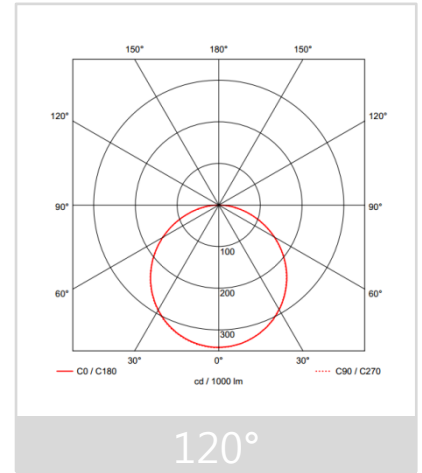

Description

Dimension - W315×D315×H12mm
 Cut Out - SMPS Hole (W172×D85mm)
 Power Consumption - 24W
 Luminous Flux - 2,365lm
 Luminous Efficacy - 95lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 50,000hrs
 Control - Wireless Dimmable

SMPS

Manufacturer - (주)씨지라이트
 SMPS Type - External
 Dimension - W110×D42×H25mm
 Power Consumption - 24W
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 36V / 560mA
 Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

ColoRex™ Series

Mint

Specifications



CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747



■ White

■ Description

Dimension - W489×D489×H80mm
Installation - Direct Mounting
Power Consumption - 60W
Luminous Flux - 4,800lm
Luminous Efficacy - 80lm/W
Material - Body: Steel / Cover: Acrylic
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 55V / 1200mA
Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
Package Series - LG 3528



■ White

■ Description

Dimension - W663×D330×H80mm
Installation - Direct Mounting
Power Consumption - 60W
Luminous Flux - 4,800lm
Luminous Efficacy - 80lm/W
Material - Body: Steel / Cover: Acrylic
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 55V / 1200mA
Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
Package Series - LG 3528



■ White

■ Description

Dimension - W663×D684×H100mm
 Installation - Direct Mounting
 Power Consumption - 120W
 Luminous Flux - 9,600lm
 Luminous Efficacy - 80lm/W
 Material - Body: Steel / Cover: Acrylic
 Beam Angle - 180°
 Color Temperature - 3000~6500K Color changeable
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
 SMPS Type - Internal
 Dimension - W220×D42×H27mm
 Power Consumption - 60Wx2
 Input Voltage - AC 100-240V / 50-60Hz
 Output Voltage - DC 55V / 1200mA
 Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
 Package Series - LG 3528



■ White

■ Description

Dimension - W663×D1029×H100mm
Installation - Direct Mounting
Power Consumption - 180W
Luminous Flux - 14,400lm
Luminous Efficacy - 80lm/W
Material - Body: Steel / Cover: Acrylic
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220×D42×H27mm
Power Consumption - 60Wx3
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 55V / 1200mA
Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
Package Series - LG 3528

ColoRex™ Series

Pebbles

Specifications



CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747



■ White

■ Description

Dimension - W510×D510×H90mm
Installation - Direct Mounting
Power Consumption - 60W
Luminous Flux - 4,800lm
Luminous Efficacy - 80lm/W
Material - Body: Steel / Cover: PMMA
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 55V / 1200mA
Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
Package Series - LG 3528



■ White

■ Description

Dimension - W680×D350×H90mm
Installation - Direct Mounting
Power Consumption - 60W
Luminous Flux - 4,800lm
Luminous Efficacy - 80lm/W
Material - Body: Steel / Cover: PMMA
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220×D42×H27mm
Power Consumption - 60W
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 55V / 1200mA
Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
Package Series - LG 3528



■ White

■ Description

Dimension - W680×D680×H110mm
Installation - Direct Mounting
Power Consumption - 120W
Luminous Flux - 9,600lm
Luminous Efficacy - 80lm/W
Material - Body: Steel / Cover: PMMA
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220×D42×H27mm
Power Consumption - 60Wx2
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 55V / 1200mA
Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
Package Series - LG 3528



■ White

■ Description

Dimension - W680×D1035×H110mm
Installation - Direct Mounting
Power Consumption - 180W
Luminous Flux - 14,400lm
Luminous Efficacy - 80lm/W
Material - Body: Steel / Cover: PMMA
Beam Angle - 180°
Color Temperature - 3000~6500K Color changeable
CRI - Ra >80
Life Time - 35,000hrs
Control - Wireless Dimmable

■ SMPS

Manufacturer - (주)씨지라이팅
SMPS Type - Internal
Dimension - W220×D42×H27mm
Power Consumption - 60Wx3
Input Voltage - AC 100-240V / 50-60Hz
Output Voltage - DC 55V / 1200mA
Control - Wireless Dimmable

■ LED

Manufacturer - LG Innotek
Package Series - LG 3528


ColoRex™ Series Mania Specifications





■ White

■ Light Distribution

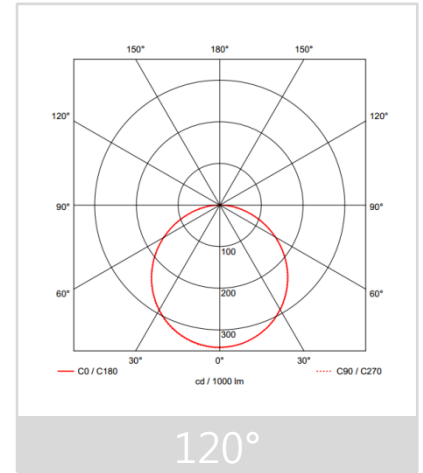

■ Description

Dimension - W418×D401×H40mm
 Installation - Pendant Type
 Power Consumption - 20Wx2
 Luminous Flux - 3,800lm
 Luminous Efficacy - 95lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Wireless Dimmable

■ LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528


■ SMPS

Manufacturer - (주)씨지라이팅
 SMPS Type - Internal
 Dimension - W110×D42×H25mm
 Power Consumption - 20Wx2
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 36V / 560mA
 Control - Wireless Dimmable



■ White

Light Distribution

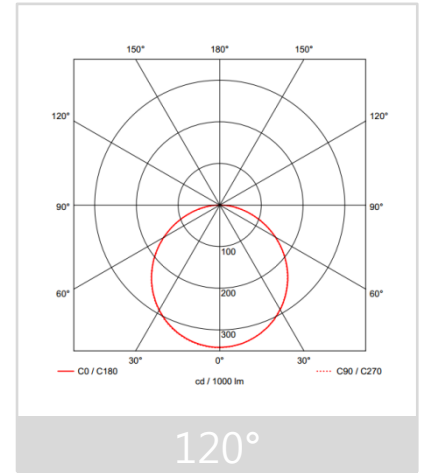

Description

Dimension – W786×D417×H40mm
 Installation - Pendant Type
 Power Consumption - 20Wx4
 Luminous Flux – 7,600lm
 Luminous Efficacy - 95lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528


SMPS

Manufacturer - (주)씨지라이트
 SMPS Type – Internal
 Dimension - W110×D42×H25mm
 Power Consumption - 20Wx4
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 36V / 560mA
 Control - Wireless Dimmable



■ White

Light Distribution

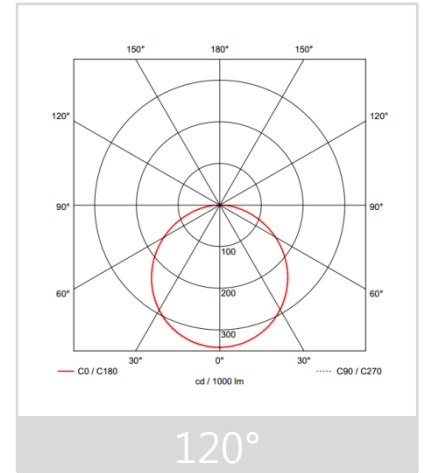

Description

Dimension - W1,170×D414×H40mm
 Installation - Pendant Type
 Power Consumption - 20Wx6
 Luminous Flux - 11,400lm
 Luminous Efficacy - 95lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Wireless Dimmable


SMPS

Manufacturer - (주)씨지라이팅
 SMPS Type - Internal
 Dimension - W110×D42×H25mm
 Power Consumption - 20Wx6
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 36V / 560mA
 Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

Light Distribution

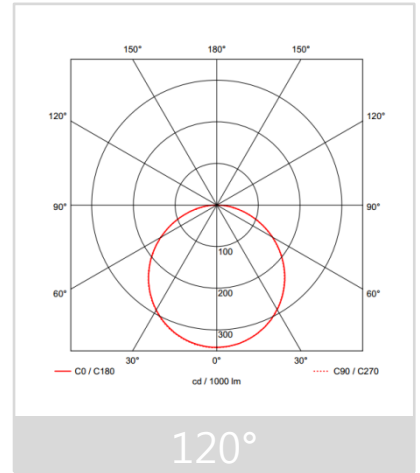

White

Description


Dimension - W789×D786×H40mm
 Installation - Pendant Type
 Power Consumption - 20Wx8
 Luminous Flux - 15,200lm
 Luminous Efficacy - 95lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528


SMPS

Manufacturer - (주)씨지라이팅
 SMPS Type - Internal
 Dimension - W110×D42×H25mm
 Power Consumption - 20Wx8
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 36V / 560mA
 Control - Wireless Dimmable

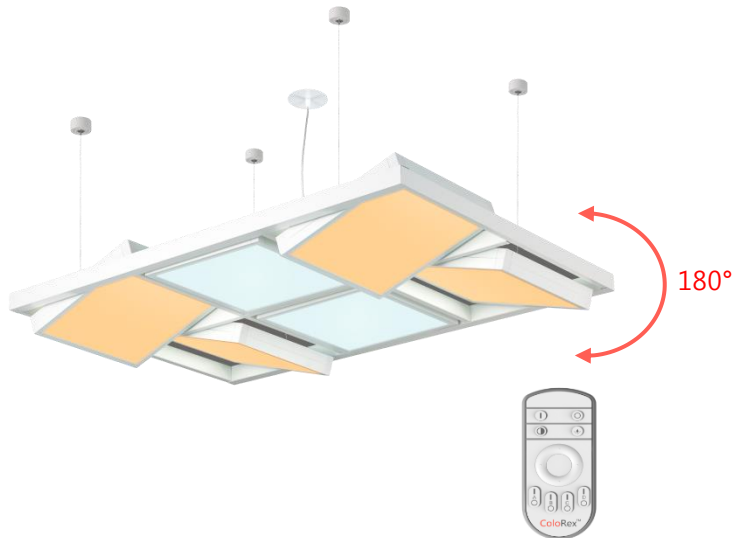

■ White

Light Distribution

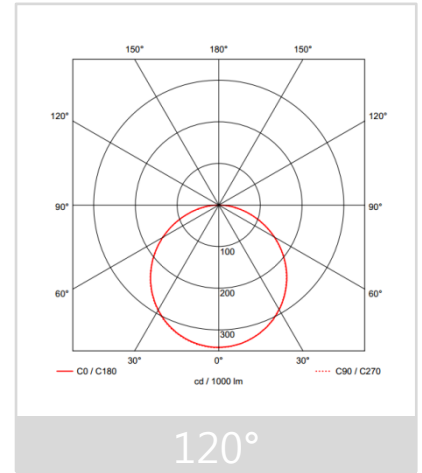

Description

Dimension - W1,170×D786×H40mm
 Installation - Pendant Type
 Power Consumption - 20Wx12
 Luminous Flux - 22,800lm
 Luminous Efficacy - 95lm/W
 Material - Body: AL / Cover: Polycarbonate
 Beam Angle - 120°
 Color Temperature - 3000~6500K Color Changeable
 CRI - Ra >80
 Life Time - 35,000hrs
 Control - Wireless Dimmable

SMPS

Manufacturer - (주)씨지라이팅
 SMPS Type - Internal
 Dimension - W110×D42×H25mm
 Power Consumption - 20Wx12
 Input Voltage - AC 220~240V / 50~60Hz
 Output Voltage - DC 36V / 560mA
 Control - Wireless Dimmable

LED

Manufacturer - Seoul Semiconductor
 Package Series - SMD 3528

ColoRex™ Series Standing Light Specifications



CG Lighting, C509 Indeokwon IT Valley Imi-ro 40 (653 Poil-dong), Uiwang-si, Gyeonggi-do, Korea
Web: www.cgled.co.kr / Tel: +82-2-596-5747



■ White

■ Description

Dimension - W190×D362×H500mm
Power Consumption - 10W
Material - Body: ABS
Head Tilting Angle - Up & Down 90°, Left & Right 160°
Beam Angle - 92°
Color Temperature - 3300K~5500K
CRI - Ra >80
Life Time - 35,000hrs

■ SMPS

Manufacturer - 해외인증품
SMPS Type - External
Input Voltage - AC 100-240V / 50-60Hz
Operating Voltage - DC 12V / 1000mA

■ LED

Manufacturer - Epistar
Package Series - SMD 2835



■ White

■ Description

Dimension - W165×D165×H660mm
Power Consumption - 5W
Material - Body: ABS
Head Tilting Angle - Up & Down 145°, Left & Right 45°
Beam Angle - 120°
Color Temperature - 3300K~6000K
CRI - Ra >80
Life Time - 35,000hrs

■ SMPS

Manufacturer - 해외인증품
SMPS Type - External
Input Voltage - AC 100-240V / 50-60Hz
Operating Voltage - DC 5V / 1000mA

■ LED

Manufacturer - Epistar
Package Series - SMD 2835



■ White

■ Description

Dimension - W115×D113×H540mm
Power Consumption - 5W
Material - Body: ABS
Head Tilting Angle - Up & Down 145°, Left & Right 45°
Beam Angle - 120°
Color Temperature - 3300K~6000K
CRI - Ra >80
Life Time - 35,000hrs

■ SMPS

Manufacturer - 해외인증품
SMPS Type - External
Input Voltage - AC 100-240V / 50-60Hz
Operating Voltage - DC 5V / 1000mA

■ LED

Manufacturer - Epistar
Package Series - SMD 2835



■ White

■ Description

Dimension - W218×D438×H166mm
Power Consumption - 9W
Material - Body: ABS
Head Tilting Angle - Up & Down 45°, Left & Right 180°
Beam Angle - 120°
Color Temperature - 5,500K / Color Changeable
CRI - Ra >80
Life Time - 35,000hrs

■ SMPS

Manufacturer - 해외인증품
SMPS Type - External
Input Voltage - AC 100-240V / 50-60Hz
Operating Voltage - DC 12V / 1000mA

■ LED

Manufacturer - Epistar
Package Series - SMD 4014



■ White

■ Description


Dimension - W110×D110×H510mm
Power Consumption - 10W
Material - Body: ABS
Head Tilting Angle - Up & Down 180°
Beam Angle - 92°
Color Temperature - 6,000K
CRI - Ra >80
Life Time - 35,000hrs

■ SMPS

Manufacturer - 해외인증품
SMPS Type - External
Input Voltage - AC 100-240V / 50-60Hz
Operating Voltage - DC 12V / 1000mA

■ LED

Manufacturer - Epistar
Package Series - SMD 4014

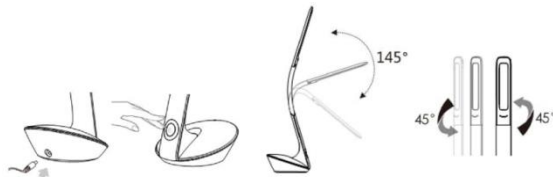

■ White

■ Description

Dimension - W170×D320×H170mm
Power Consumption - 12W
Material - Body: ABS
Head Tilting Angle - Up & Down 145°, Left & Right 45°
Beam Angle - 120°
Color Temperature - 5,500K / Color Changeable
CRI - Ra >80
Life Time - 35,000hrs

■ SMPS

Manufacturer - 해외인증품
SMPS Type - External
Input Voltage - AC 100-240V / 50-60Hz
Operating Voltage - DC 12V / 1000mA

■ LED

Manufacturer - Epistar
Package Series - SMD 2835